


(2,00 mm) .0787"

MEC2 SERIES

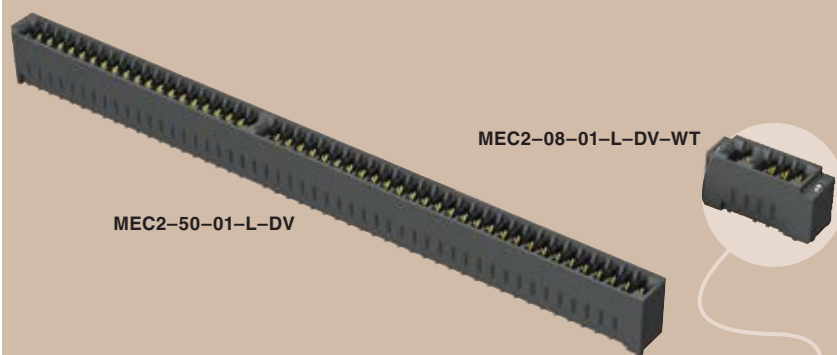

MEC2-08-01-L-DV-WT

MEC2-50-01-L-DV

MICRO EDGE CARD SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MEC2-DV

Insulator Material:

-01=Black Liquid
Crystal Polymer
-02=Natural Liquid
Crystal Polymer

Contact Material:

BeCu

Plating:

Sn or Au over
50µ" (1,27 µm) Ni

Operating Temp Range:

-55°C to +125°C

Current Rating:

2.5A per contact @ 95°C

ambient

Voltage Rating:

238 VAC

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,10 mm) .004" max (05-30)

(0,15 mm) .006" max (40-50)

APPLICATION SPECIFIC

Non-polarized
Call Samtec.

Mates with:
(1,60 mm) .062" card,
(2,36 mm) .093" card

Choice of
two card
thicknesses

Up to
98 I/Os

Rugged
Weld Tab
option

Polarized

(2,00 mm)
.0787" pitch

Alignment
Pins

MEC2

POSITIONS
PER ROWCARD
THICKNESSPLATING
OPTION

DV

OPTION

-05, -08, -20,
-30, -40, -50

-01
= (1,60 mm) .062"
thick card
-02
= (2,36 mm) .093"
thick card

-L
= 10µ" (0,25 µm)
Gold on contact,
Matte Tin on tail

-WT
= Weld Tabs
(Standard on
-02 card thickness,
optional on -01
card thickness)

-K
= (5,00 mm) .197" DIA
(-01 card thickness)
(5,70 mm) .224" DIA
(-02 card thickness)
Polyimide film
pick & place pad
(-TR only)

-TR
= Tape & Reel
packaging
(-05 thru -30
positions only)






POSITIONS PER ROW	A	B	C	D
-05	(13,40) .528	(11,50) .453	(17,40) .685	(15,40) .606
-08	(19,40) .764	(17,50) .689	(23,40) .921	(21,40) .843
-20	(43,40) 1.709	(41,50) 1.634	(47,40) 1.866	(45,40) 1.787
-30	(63,40) 2.496	(61,50) 2.421	(67,40) 2.654	(65,40) 2.575
-40	(83,40) 3.283	(81,50) 3.209	(87,40) 3.441	(85,40) 3.362
-50	(103,40) 4.071	(101,50) 3.996	(107,40) 4.228	(105,40) 4.150

POSITIONS PER ROW	POLARIZED POSITIONS (No Contact)
-05	3, 4
-08	5, 6
-20	15, 16
-30	21, 22
-40	31, 32
-50	41, 42

Note: While optimized for 50Ω applications, this connector with alternative signal/ground patterns may also perform well in certain 75Ω applications. Contact Samtec for further information.

Note: Other Gold plating options available. Contact Samtec.

Note: Some sizes, styles and options are non-standard, non-returnable.



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683