
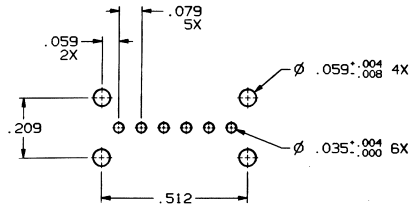




CONVERSION CHART	
INCH	MM
.004	0.10
.008	0.20
.010	0.25
.016	0.40
.020	0.50
.031	0.79
.035	0.90
.059	1.50
.079	2.00
.090	2.29
.098	2.50
.118	3.00
.138	3.50
.146	3.71
.209	5.30
.220	5.59
.236	5.99
.394	10.00
.551	14.00



P.C. HOLE LAYOUT
TOLERANCE = ±.004

SPECIFICATIONS:

MATERIALS:
FRAME: STEEL, TIN PLATED.
ACTUATOR: PBT 94V-0.
MOVABLE CONTACT: GOLD PLATED OVER NICKEL.
STATIONARY CONTACT: GOLD PLATED OVER NICKEL.
TERMINALS: GOLD PLATED OVER NICKEL.


ELECTRICAL:
CONTACT RATING: 0.4 VA MAX. @ 20 VDC OR PEAK AC.
INITIAL CONTACT RESISTANCE: 20 MILLIOHMS MAX., INITIAL.
INSULATION RESISTANCE: 1,000 MΩ MIN. AT 500 VDC.
DIELECTRIC STRENGTH: 500 VOLTS RMS AT SEA LEVEL.
LIFE: 10,000 OPERATIONS.

MECHANICAL:
OPERATING FORCE: 100g TO 600g.

ENVIRONMENTAL:
OPERATING TEMPERATURE: -20°C TO +85°C (-4°F TO +185°F).
STORAGE TEMPERATURE: -40°C TO +100°C (-40°F TO +212°F).

NOTES:

- INTERPRET DRAWING PER ASME Y14.5M-1994.
- TRAVEL BETWEEN POSITIONS .079.



SCHEMATIC

THIS IS A C.A.D. GENERATED DRAWING.
DO NOT MAKE MANUAL REVISIONS TO MASTER.

REV	REVISIONS
A	ESM# 2200
B	ECM# 2774
C	1-8-88
D	ECM# 2815
E	ECM# 3102
F	TH/CF 4-3-88
G	ECM# 3884
H	11-30-90 DS
I	REVISED
J	ECM# 3884
K	ECM# 3884
L	APP'D: M. LEPAGE 6-8-95
M	REVISED
N	ECM# 801-95
O	APP'D: 1-6-95
P	APP'D: 1-6-95
Q	APP'D: 1-6-95
R	APP'D: 1-6-95
S	APP'D: 1-6-95
T	APP'D: 1-6-95
U	APP'D: 1-6-95
V	APP'D: 1-6-95
W	APP'D: 1-6-95
X	APP'D: 1-6-95
Y	APP'D: 1-6-95
Z	APP'D: 1-6-95

OUTLINE DRAWING

SPECIFICATIONS ARE SUBJECT TO CHANGES WITHOUT NOTICE

THIRD ANGLE PROJECTION
TOLERANCES (EXCEPT AS NOTED)
ANGULAR = ±1°
DECIMAL .XX = ±
DECIMAL .XXX = ±.010
DECIMAL .XXXX = ±
AUGAT CONFIDENTIAL
This document contains information which is the exclusive property of Augat Inc.
Distribution, reproduction or use by others is not permitted without the expressed written consent of Augat Inc.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DO NOT SCALE PRINT	
FILE NAME: 80739OUT	DIRECTORY: SLOSWTCH
MATERIAL: SEE SPECIFICATIONS	
FINISH: SEE SPECIFICATIONS	

CD	ORIGINAL DATE OF DRAWING: 7/86	
	DRAWN: T.H.	DATE: 7/86
	CHECKED:	DATE:
S	APPROVED: M. LEPAGE	DATE: 6-8-95
	CODE IDENT. NO. 91506	DWG. SI C
S	NEXT ASSY:	

AUGAT INC.	432 JOHN DIETSON BLVD. ATLEBORO FALLS, MASS. 02763
TITLE: OUTLINE DRAWING SLIDE SWITCH (MSS2200G)	DWG. NO. 80739-SD
PRODUCT CODE: C15	REV. 2
SCALE:	SHEET 1 OF 1