
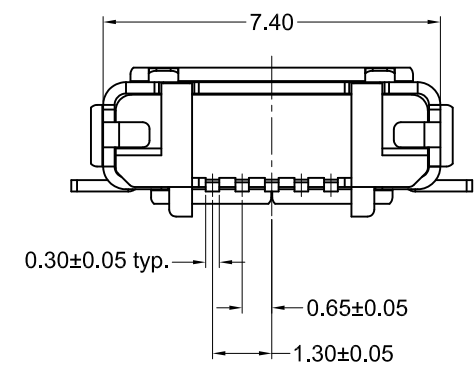
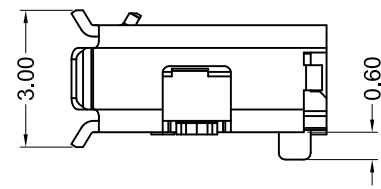
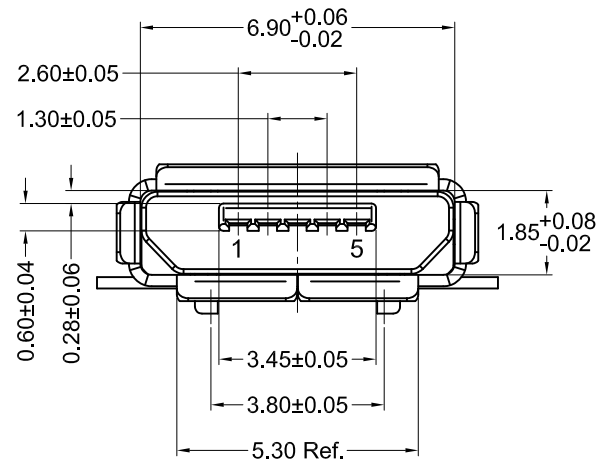
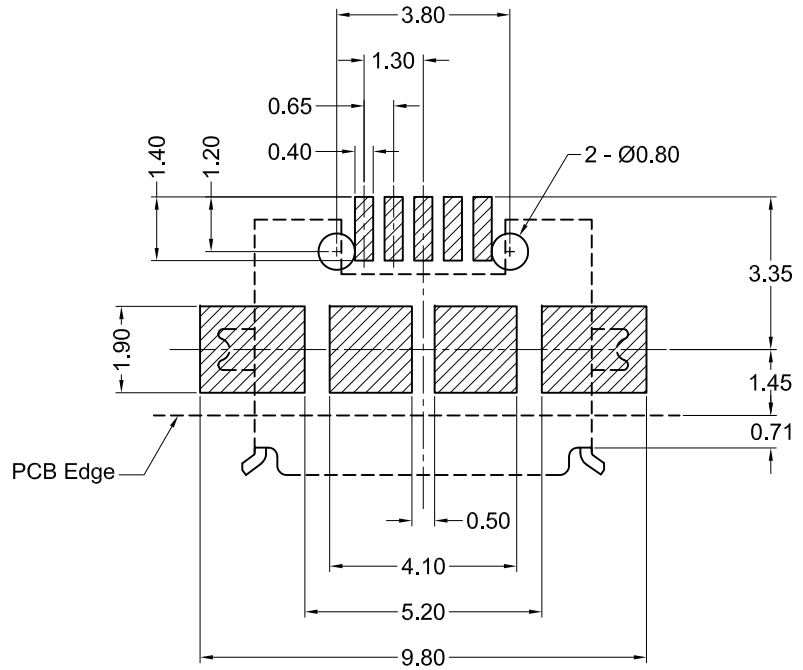


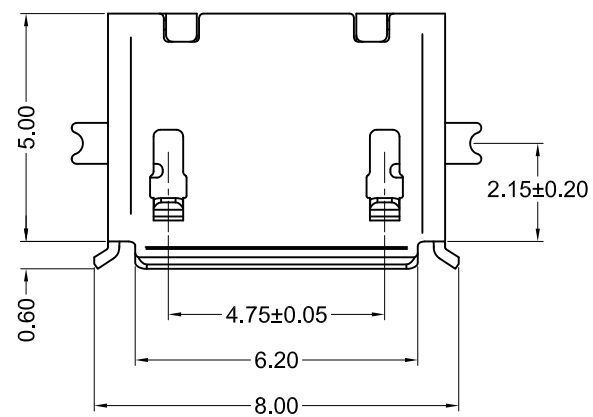

Material and Finish

Housing: High Temp., Thermoplastics,
Color - Gray
UL 94V-0 Rated
Contacts: Copper Alloy,
30u" gold plated on entire contact
Shell: Stainless Steel, Nickel plated

Electrical Specifications

Rated Current: 1.5A Max.
Rated Voltage: 5V AC (rms Max.)
Insulation Resistance:
1000 megohms Min.
Contact Resistance:
30 milliohms max.
Dielectric Withstanding Voltage:
100V AC
Operating Temperature:
-30°C to +85°C

RoHS COMPLIANT

E134345

LR78160

Tolerances	
X.X ± 0.35	Unless Stated Otherwise
X.XX ± 0.25	

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE	KMMX-ABSMT5SG-30TR	Micro USB, Type - AB, SMT, 30u" Gold	
A1	12/12/07	Release Drawing	H. MA	N/A	A. Frederick	08/17/07			
A2	08/18/09	Add Specification	S. Vien	H. MA					
A3	02/27/12	ECO #12-009	S. Vien	H. MA					
A4	01/16/13	ECO #12-063	S. Vien	P. DalCanto		UNITS			
A5	04/26/13	ECO #13-019	W. Cook	P. DalCanto		mm			
A6	08/28/14	Add UL Rating	W. Cook	P. DalCanto					
								Gray insulator, RoHS Compliant	