

CMXTVS5V6  
CMXTVS6V2

SURFACE MOUNT SILICON  
QUAD TVS/ZENER ARRAY



www.centrasemi.com



Specified by  
BREAKDOWN VOLTAGE

SOT-26 CASE

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMXTVS5V6 and CMXTVS6V2 are 4-line TVS/Zener arrays packaged in a surface mount case. These devices are designed to protect sensitive electronic equipment, such as computers, networking communication, cell phones and instrumentation from over-voltage transients and ESD damage.

**MARKING CODES: CMXTVS5V6: 5V6C  
CMXTVS6V2: 6V2C**

**FEATURES:**

- Very Low Clamping Voltage
- Low Leakage Current
- 150W Peak Power Dissipation

**APPLICATIONS:**

- Hand Held Portable Equipment
- Networks, Servers and Telecom
- Desktop and Notebook Computers
- Instrumentation

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Peak Power Dissipation (8x20 $\mu\text{s}$ )  
Peak Power Dissipation (10x1000 $\mu\text{s}$ )  
ESD Voltage (IEC 61000-4-2, Air)  
ESD Voltage (IEC 61000-4-2, Contact)  
Operating and Storage Junction Temperature

**SYMBOL**

$P_{PK}$  150  
 $P_{PK}$  24  
 $V_{ESD}$  20  
 $V_{ESD}$  15  
 $T_J, T_{stg}$  -55 to +150

**UNITS**

W  
W  
kV  
kV  
 $^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS PER DIODE:** ( $T_A=25^\circ\text{C}$ )


Type	Breakdown Voltage			Maximum Leakage Current		Maximum Clamping Voltage (10x1000 $\mu\text{s}$ )		Maximum Clamping Voltage (8x20 $\mu\text{s}$ )		Maximum Capacitance @ 0V Bias	Maximum Capacitance @ 2.8V Bias	Maximum Impedance
	$V_{BR} @ 1.0\text{mA}$			$I_{RWM} @ V_{RWM}$		$V_C @ I_{PP}$		$V_C @ I_{PP}$		pF	pF	$Z_{ZT} @ 1.0\text{mA}$
	MIN V	NOM V	MAX V	$\mu\text{A}$	V	V	A	V	A			
CMXTVS5V6	5.32	5.6	5.88	2.0	3.0	8.0	3.0	12	12.5	275	160	400
CMXTVS6V2	5.89	6.2	6.51	0.7	4.3	9.0	2.66	12.5	12	260	150	300

CMXTVS5V6  
CMXTVS6V2


SURFACE MOUNT SILICON  
QUAD TVS/ZENER ARRAY



SOT-26 CASE - MECHANICAL OUTLINE

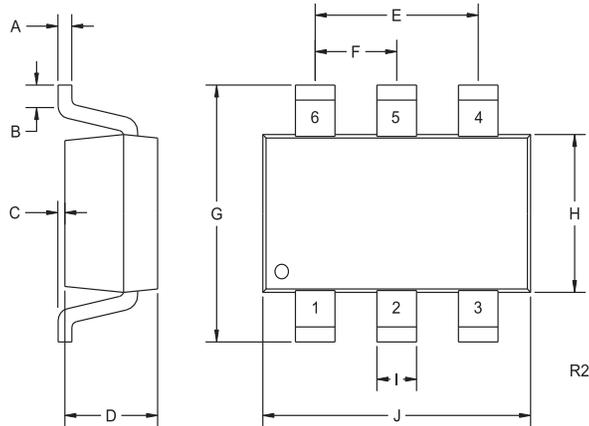

PIN CONFIGURATION

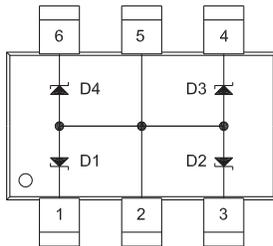

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.007	0.11	0.19
B	0.016	-	0.40	-
C	-	0.004	-	0.10
D	0.039	0.047	1.00	1.20
E	0.074	0.075	1.88	1.92
F	0.037	0.038	0.93	0.97
G	0.102	0.118	2.60	3.00
H	0.059	0.067	1.50	1.70
I	0.016		0.41	
J	0.110	0.118	2.80	3.00

SOT-26 (REV: R2)

LEAD CODE:

- 1) Cathode D1
- 2) Anode D1, D2, D3, D4
- 3) Cathode D2
- 4) Cathode D3
- 5) Anode D1, D2, D3, D4
- 6) Cathode D4

MARKING CODES: CMXTVS5V6: 5V6C  
CMXTVS6V2: 6V2C

R4 (6-April 2015)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Central Semiconductor:](#)

[CMXTVS5V6 TR](#) [CMXTVS6V2 TR](#)