

NAM series


NAM -10 -000 -□

①

②

③

④

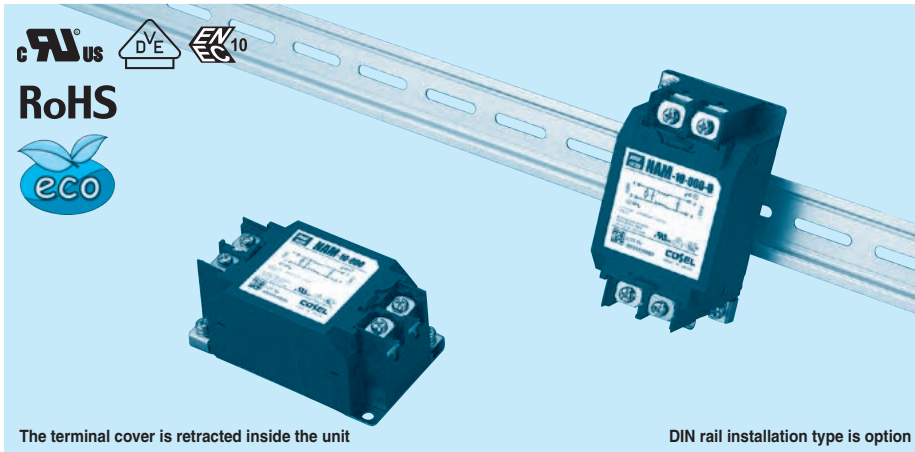

① Model Name

② Rated Current

③ Line to ground capacitor code: See table 1.1.

table 1.1 Line to ground capacitor code

Code	Leakage Current (Input 125/250V 60Hz)	Line to ground capacitor (nominal value)
000	5 μ A / 10 μ A max	Not Provided
101	12.5 μ A / 25 μ A max	100pF
221	25 μ A / 50 μ A max	220pF
331	37.5 μ A / 75 μ A max	330pF
471	50 μ A / 100 μ A max	470pF

* When the line to ground capacitor code is different, the attenuation characteristic is different.

④ Options

D: DIN rail installation type

* The dimensions change when the option is set.
Refer to External view.

Features of NAM series


Low leakage current type

- Single Phase 250 VAC
- Push down type terminal block


Specifications

No.	Items	NAM-04-000	NAM-06-000	NAM-10-000	NAM-16-000	NAM-20-000	NAM-30-000
1	Rated Voltage[V]	AC 1 ϕ 250 / DC250					
2	Rated Current[A]	4	6	10	16	20	30
3	Test Voltage (Terminal-Mounting Plate)	2,500 VAC (Cutoff Current = 20mA), 1minute at room temperature and humidity					
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 100M Ω min at room temperature and humidity					
5	Leakage current 125/250V 60Hz	5 μ A/10 μ A max					
6	Voltage drop	1.0V max					
7	Safety agency approval temperatures	-25 to +85°C (Refer to Derating Curve)					
8	Operating temperature	-40 to +85°C (Refer to Derating Curve)					
9	Operating humidity	20 to 95%RH (Non condensing)					
10	Storage temperature/humidity	-40 to +85°C/20 to 95%RH (Non condensing)					
11	Vibration	10 to 55Hz, 19.6m/s ² (2G), 3min. Period, 1hour each X, Y and Z axis					
12	Impact	196.1m/s ² (20G), 11ms Once each X, Y and Z axis					
13	Safety agency approvals	UL1283, CSA C22.2 No.8 (C-UL), DIN EN60939 VDE0565 Teil3-1, ENEC (At only AC input)					
14	Case size (without projection) /Weight	53×41×92 mm [2.09×1.61×3.62 inches] (W×H×D) /300g max (Option : -D refer to external view)					

Circuit Diagram

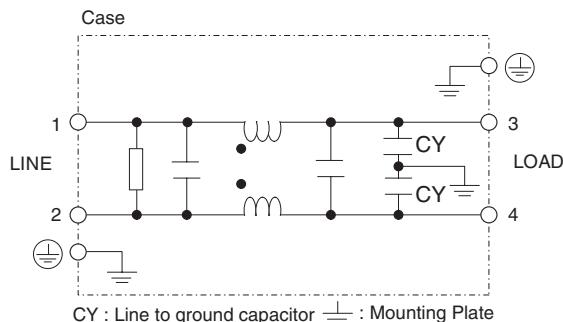

Derating Curve

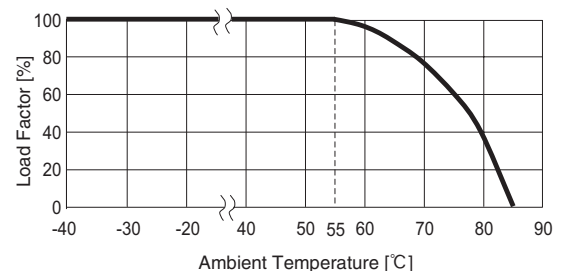


External view


As this product is adopted push-down type terminal block, this appearance is as follows.

- ① The terminal cover is retracted inside the unit.
- ② The screws for connecting the terminals are held in the up right position.

Standard Type

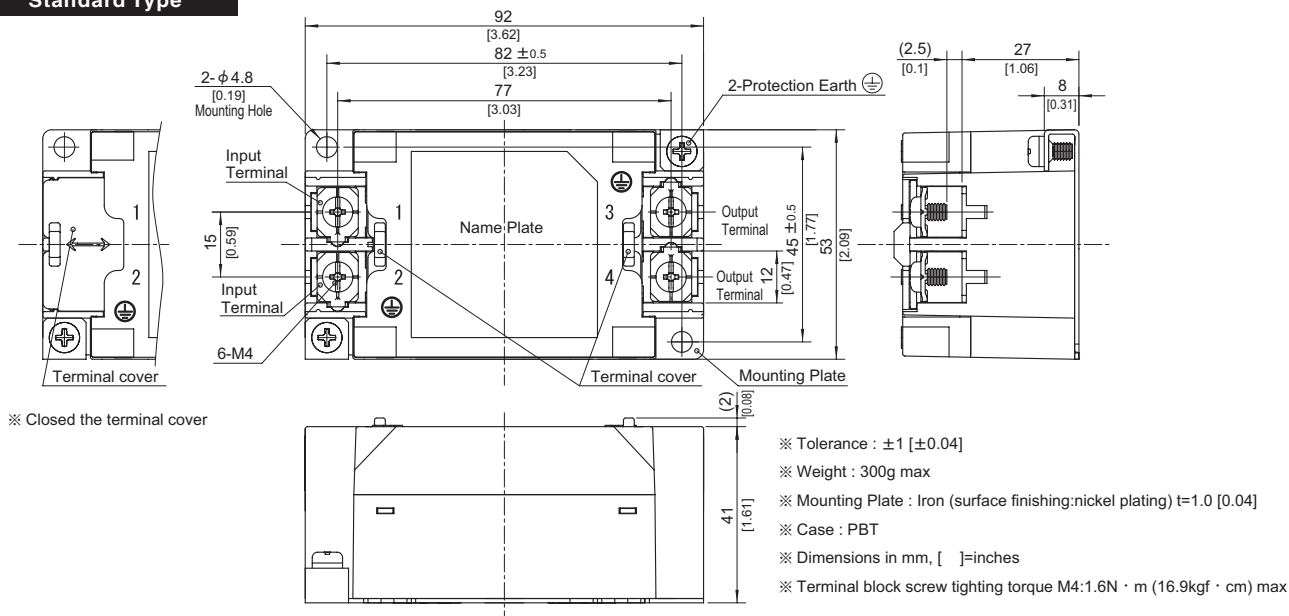


DIN rail installation Type

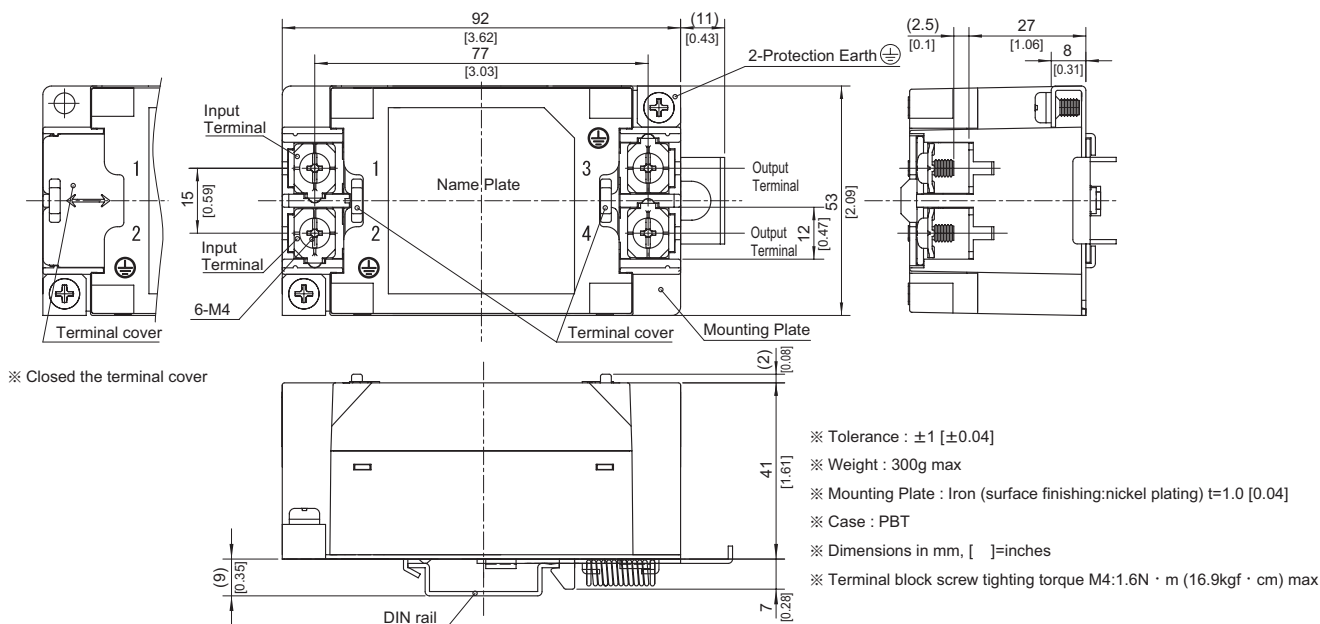

■Note when installing the EMI/EMC Filter on a DIN rail.

When the EMI/EMC Filter is grounded through the DIN rail, the proper noise attenuation may not be achieved.

Be sure to connect the protection earth (PE) of the EMI/EMC Filter body to the earth. It can connect the ground to either one only.

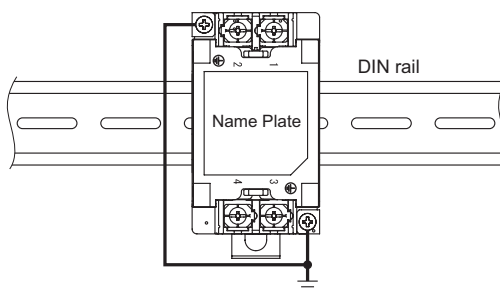

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[NAM-04-101](#) [NAM-04-101-D](#) [NAM-04-221](#) [NAM-04-221-D](#) [NAM-30-000](#) [NAM-30-000-D](#) [NAM-30-000-DXE](#) [NAM-30-000-DXU](#) [NAM-16-000-DXE](#) [NAM-16-000-DXU](#) [NAM-20-000](#) [NAM-20-000-D](#) [NAM-20-000-DXE](#) [NAM-20-000-DXU](#) [NAM-10-000](#) [NAM-10-000-D](#) [NAM-10-000-DXE](#) [NAM-10-000-DXU](#) [NAM-16-000](#) [NAM-16-000-D](#) [NAM-04-000](#) [NAM-04-000-D](#) [NAM-06-000](#) [NAM-06-000-D](#) [NAM-06-000-DXE](#) [NAM-06-000-DXU](#) [NAM-30-331-DXE](#) [NAM-30-331-DXU](#) [NAM-30-471](#) [NAM-30-471-D](#) [NAM-30-471-DXE](#) [NAM-30-471-DXU](#) [NAM-30-221](#) [NAM-30-221-D](#) [NAM-30-221-DXE](#) [NAM-30-221-DXU](#) [NAM-30-331](#) [NAM-30-331-D](#) [NAM-20-471-DXE](#) [NAM-20-471-DXU](#) [NAM-30-101](#) [NAM-30-101-D](#) [NAM-30-101-DXE](#) [NAM-30-101-DXU](#) [NAM-20-331](#) [NAM-20-331-D](#) [NAM-20-331-DXE](#) [NAM-20-331-DXU](#) [NAM-20-471](#) [NAM-20-471-D](#) [NAM-20-101-DXE](#) [NAM-20-101-DXU](#) [NAM-20-221](#) [NAM-20-221-D](#) [NAM-20-221-DXE](#) [NAM-20-221-DXU](#) [NAM-16-471](#) [NAM-16-471-D](#) [NAM-16-471-DXE](#) [NAM-16-471-DXU](#) [NAM-20-101](#) [NAM-20-101-D](#) [NAM-16-221-DXE](#) [NAM-16-221-DXU](#) [NAM-16-331](#) [NAM-16-331-D](#) [NAM-16-331-DXE](#) [NAM-16-331-DXU](#) [NAM-16-101](#) [NAM-16-101-D](#) [NAM-16-101-DXE](#) [NAM-16-101-DXU](#) [NAM-16-221](#) [NAM-16-221-D](#) [NAM-10-331-DXE](#) [NAM-10-331-DXU](#) [NAM-10-471](#) [NAM-10-471-D](#) [NAM-10-471-DXE](#) [NAM-10-471-DXU](#) [NAM-10-221](#) [NAM-10-221-D](#) [NAM-10-221-DXE](#) [NAM-10-221-DXU](#) [NAM-10-331](#) [NAM-10-331-D](#) [NAM-06-471-DXE](#) [NAM-06-471-DXU](#) [NAM-10-101](#) [NAM-10-101-D](#) [NAM-10-101-DXE](#) [NAM-10-101-DXU](#) [NAM-06-331](#) [NAM-06-331-D](#) [NAM-06-331-DXE](#) [NAM-06-331-DXU](#) [NAM-06-471](#) [NAM-06-471-D](#) [NAM-06-101-DXE](#) [NAM-06-101-DXU](#)