

## NYLON CABLE GLANDS




HT REF	Size	Colour	Cable clamp range	Pack size
NGM12-RED	M12	Red	3 -6.5mm	10
NGM16-RED	M16	Red	5- 10mm	10
NGM20S-RED	M20S	Red	6 - 12mm	10
NGM20-RED	M20	Red	10 -14mm	10
NGM25-RED	M25	Red	13-18mm	10
NGM32-RED	M32	Red	18-25mm	5
NGM12-WHT	M12	White	3 -6.5mm	10
NGM16-WHT	M16	White	5- 10mm	10
NGM20S-WHT	M20S	White	6 - 12mm	10
NGM20-WHT	M20	White	10 -14mm	10
NGM25-WHT	M25	White	13-18mm	10
NGM32-WHT	M32	White	18-25mm	5
NGM12-GRY	M12	Grey	3 -6.5mm	10
NGM16-GRY	M16	Grey	5- 10mm	10
NGM20S-GRY	M20S	Grey	6 - 12mm	10
NGM20-GRY	M20	Grey	10 -14mm	10
NGM25-GRY	M25	Grey	13-18mm	10
NGM32-GRY	M32	Grey	18-25mm	5
NGM12-BLK	M12	Black	3 -6.5mm	10
NGM16-BLK	M16	Black	5- 10mm	10
NGM20S-BLK	M20s	Black	6 - 12mm	10
NGM20-BLK	M20	Black	10 -14mm	10
NGM25-BLK	M25	Black	13-18mm	10
NGM32-BLK	M32	Black	18-25mm	5
NGM40-BLK	M40	Black	22-32mm	5
NGM50-BLK	M50	Black	30-38mm	2
NGM63-BLK	M63	Black	34-44mm	2



Nylon dome headed cable glands are quick and easy to install and cater for a wide range of cable sizes. The glands can be used on a wide range of applications when connecting cable to electrical equipment, (but not steel wire armoured cable).

Testing to IP68 provides protection against the ingress of dust and water. No need to dismantle the gland, just insert the cable and tighten.

- Material Nylon 66
- IP Rating IP68
- Metric thread
- Available in red/black/white & grey
- Euro slot packaging

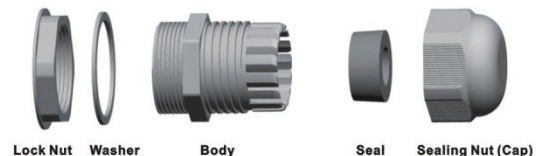

Wharf Approach, Aldridge, Walsall, West Midlands. WS9 8BX.

Tel: 01922 458151 Fax: 01922 743053

[www.hellermannntyton.co.uk](http://www.hellermannntyton.co.uk)