

NHD-4.3CTP-SHIELD-V

Color TFT Liquid Crystal Display Module + Arduino Shield

| | |
|---------|-----------------------------------------------------------------|
| NHD- | Newhaven Display |
| 4.3- | 4.3" Diagonal |
| CTP- | Capacitive Touch Panel with Controller |
| SHIELD- | Arduino Shield |
| V- | Display: NHD-4.3-480272EF-ASXV#-CTP, MVA Type, Wide Temperature |

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com

Document Revision History

| Revision | Date | Description | Changed by |
|----------|----------|-----------------|------------|
| 0 | 08/17/16 | Initial Release | PB |

Functions and Features




- 480xRGBx272 resolution, up to 262K colors
- Utilizes the FTDI FT801 Embedded Video Engine
- Wide viewing angle from all sides
- PWM backlight control
- Onboard audio power amplifier
- microSD card reader (microSD card not included)
- Built-in logic level shifting
- Assembled with NHD-4.3-480272EF-ASXV#-CTP
- Capacitive touch panel with controller
 - 5 point multi-touch input
 - Gesture input
 - Zoom In/Out
 - Swipe Up/Down/Left/Right

User Guide:


Please download User Guide at http://www.newhavendisplay.com/userguides/NHD-4.3CTP-SHIELD_User_Guide.pdf

Mechanical Drawing


| Rev | Description | Date |
|-----|-----------------|----------|
| 1.0 | Initial Release | 08/17/16 |

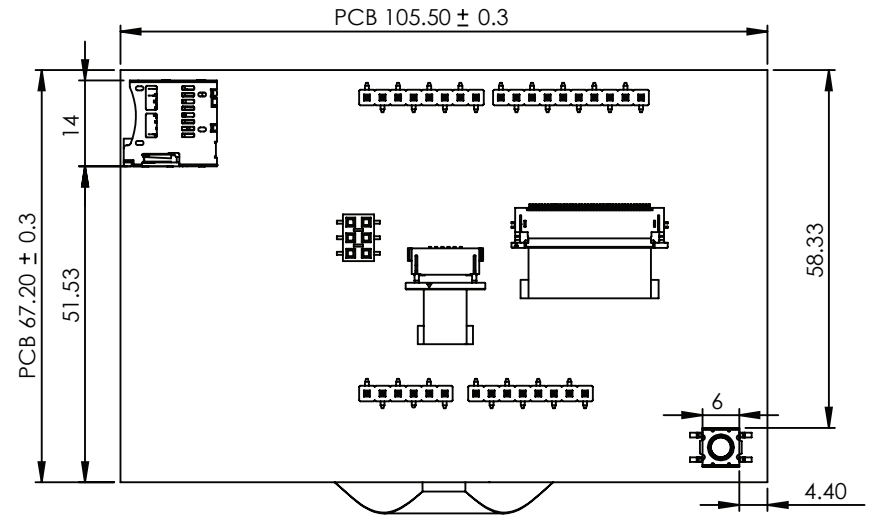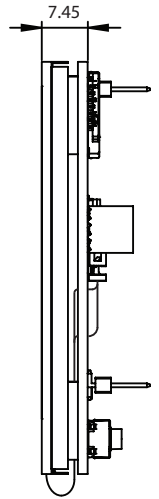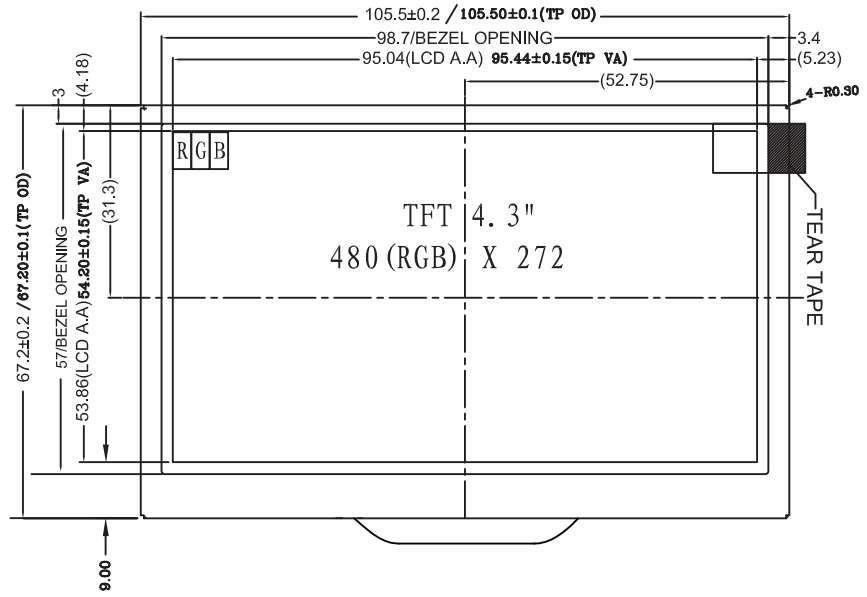

- NOTES:
1. Display Size: 4.3" TFT
 2. Optimal Viewing Direction: Full View
 3. Display Mode: Transmissive / Normally White / Anti-Glare
 4. Luminance: 700 cd/m²
 5. 3M Brightness Enhancement Film
 6. Touch Panel: PCAP

| | | |
|------------------------|---------------------------------------------------------------------------------------|-------------------------------|
| Unit mm |  | |
| Gen. Tol. ± 0.3 | Date 08/17/16 | Model: NHD-4.3CTP-SHIELD-V |

Schematic

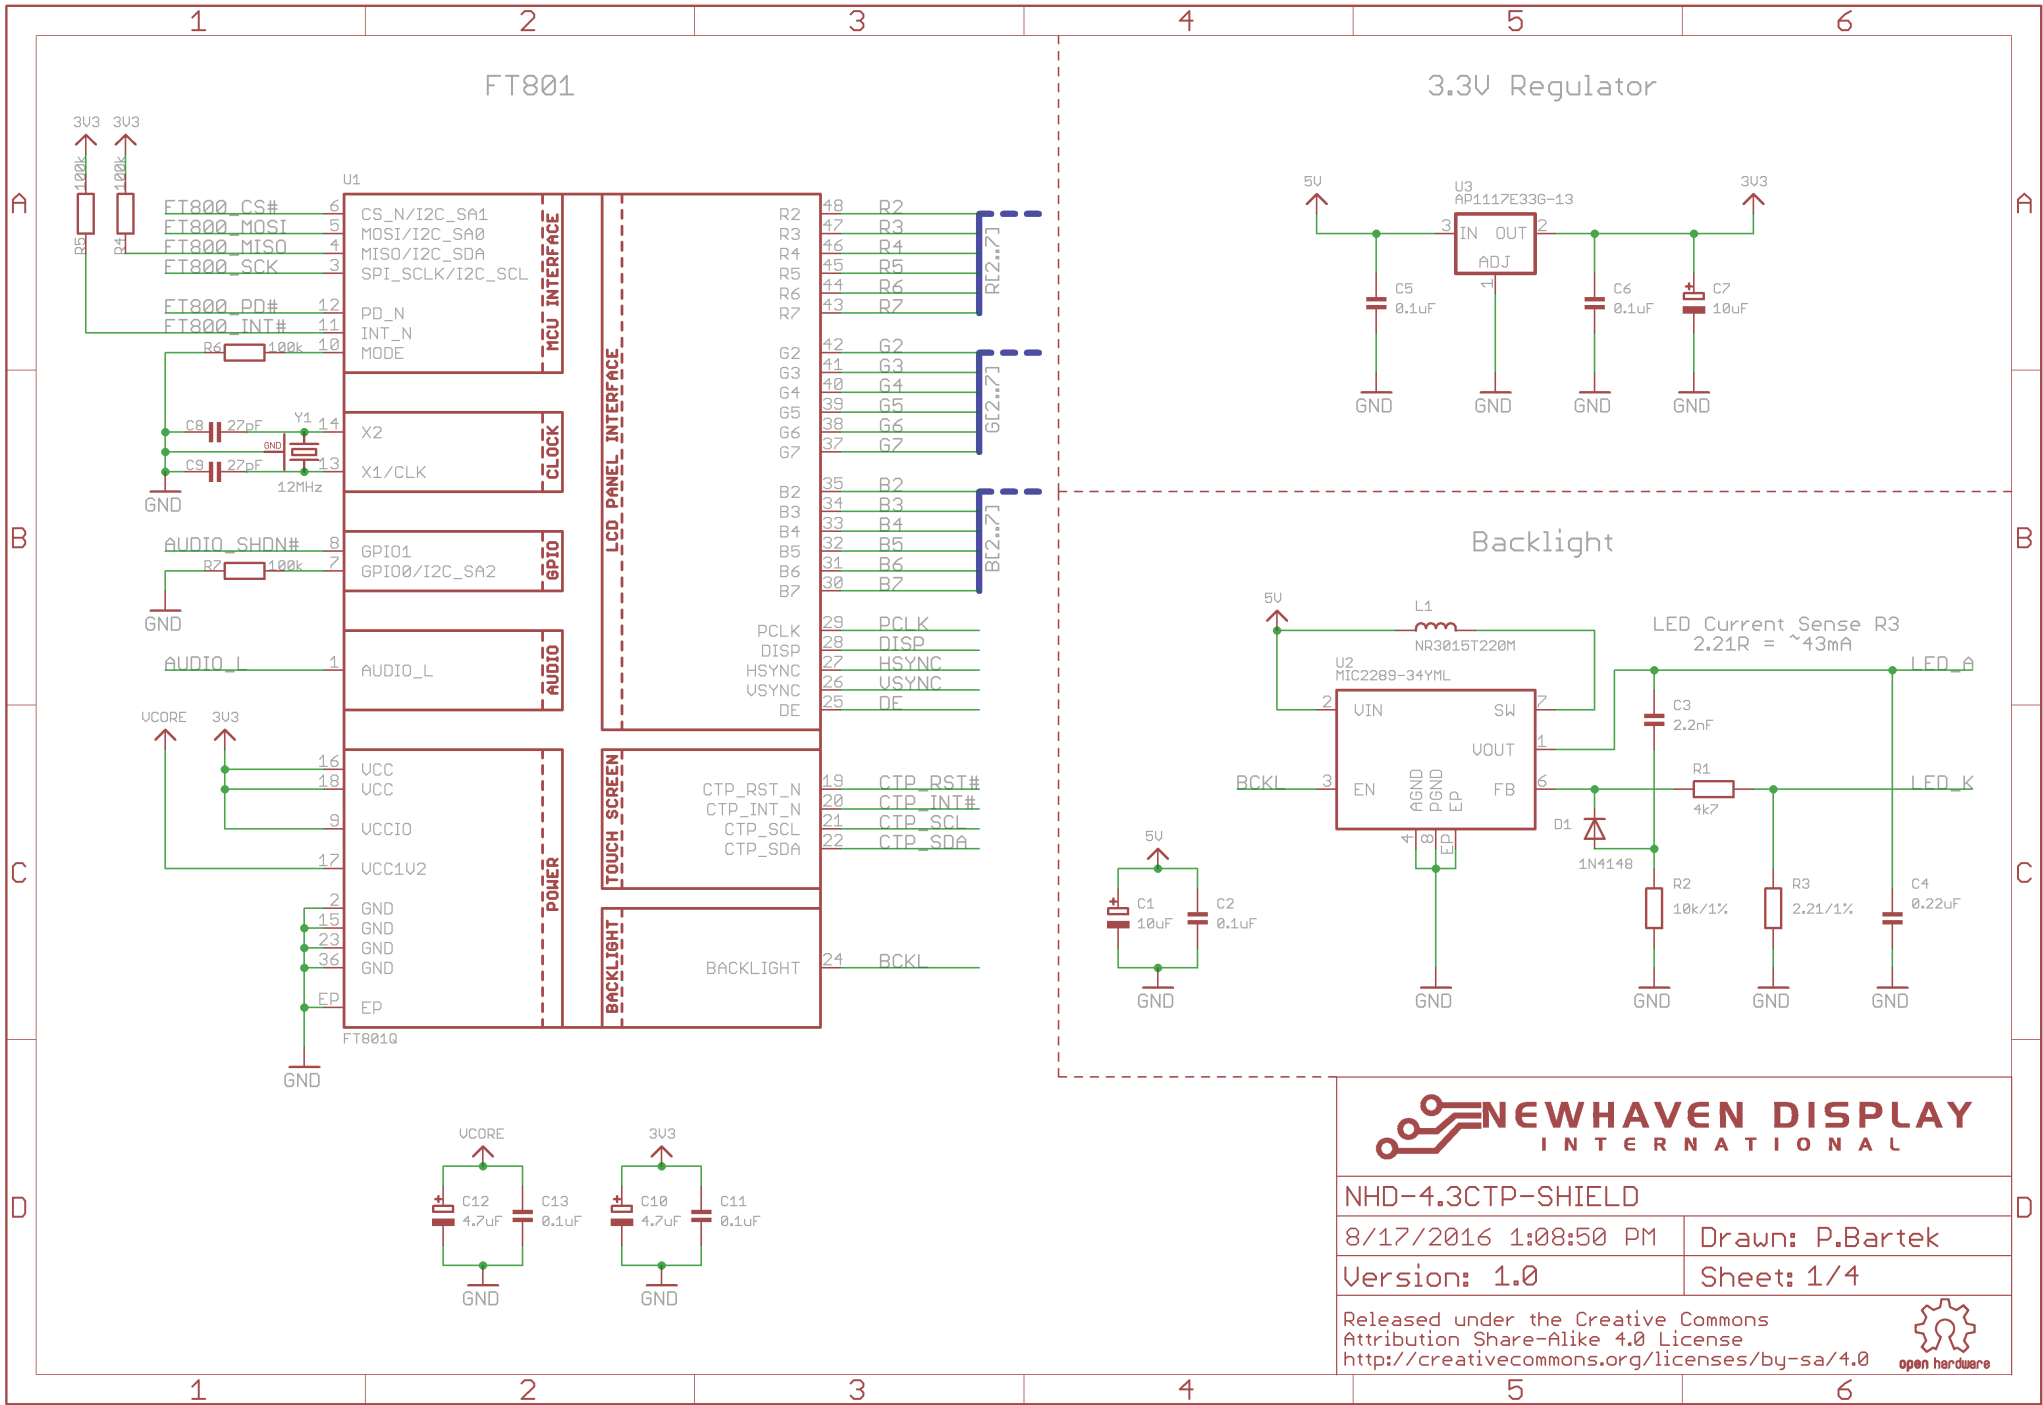

NEWHAVEN DISPLAY
INTERNATIONAL

NHD-4.3CTP-SHIELD

8/17/2016 1:08:50 PM

Drawn: P.Bartek


Version: 1.0

Sheet: 1/4


Released under the Creative Commons Attribution Share-Alike 4.0 License
<http://creativecommons.org/licenses/by-sa/4.0>




Schematic

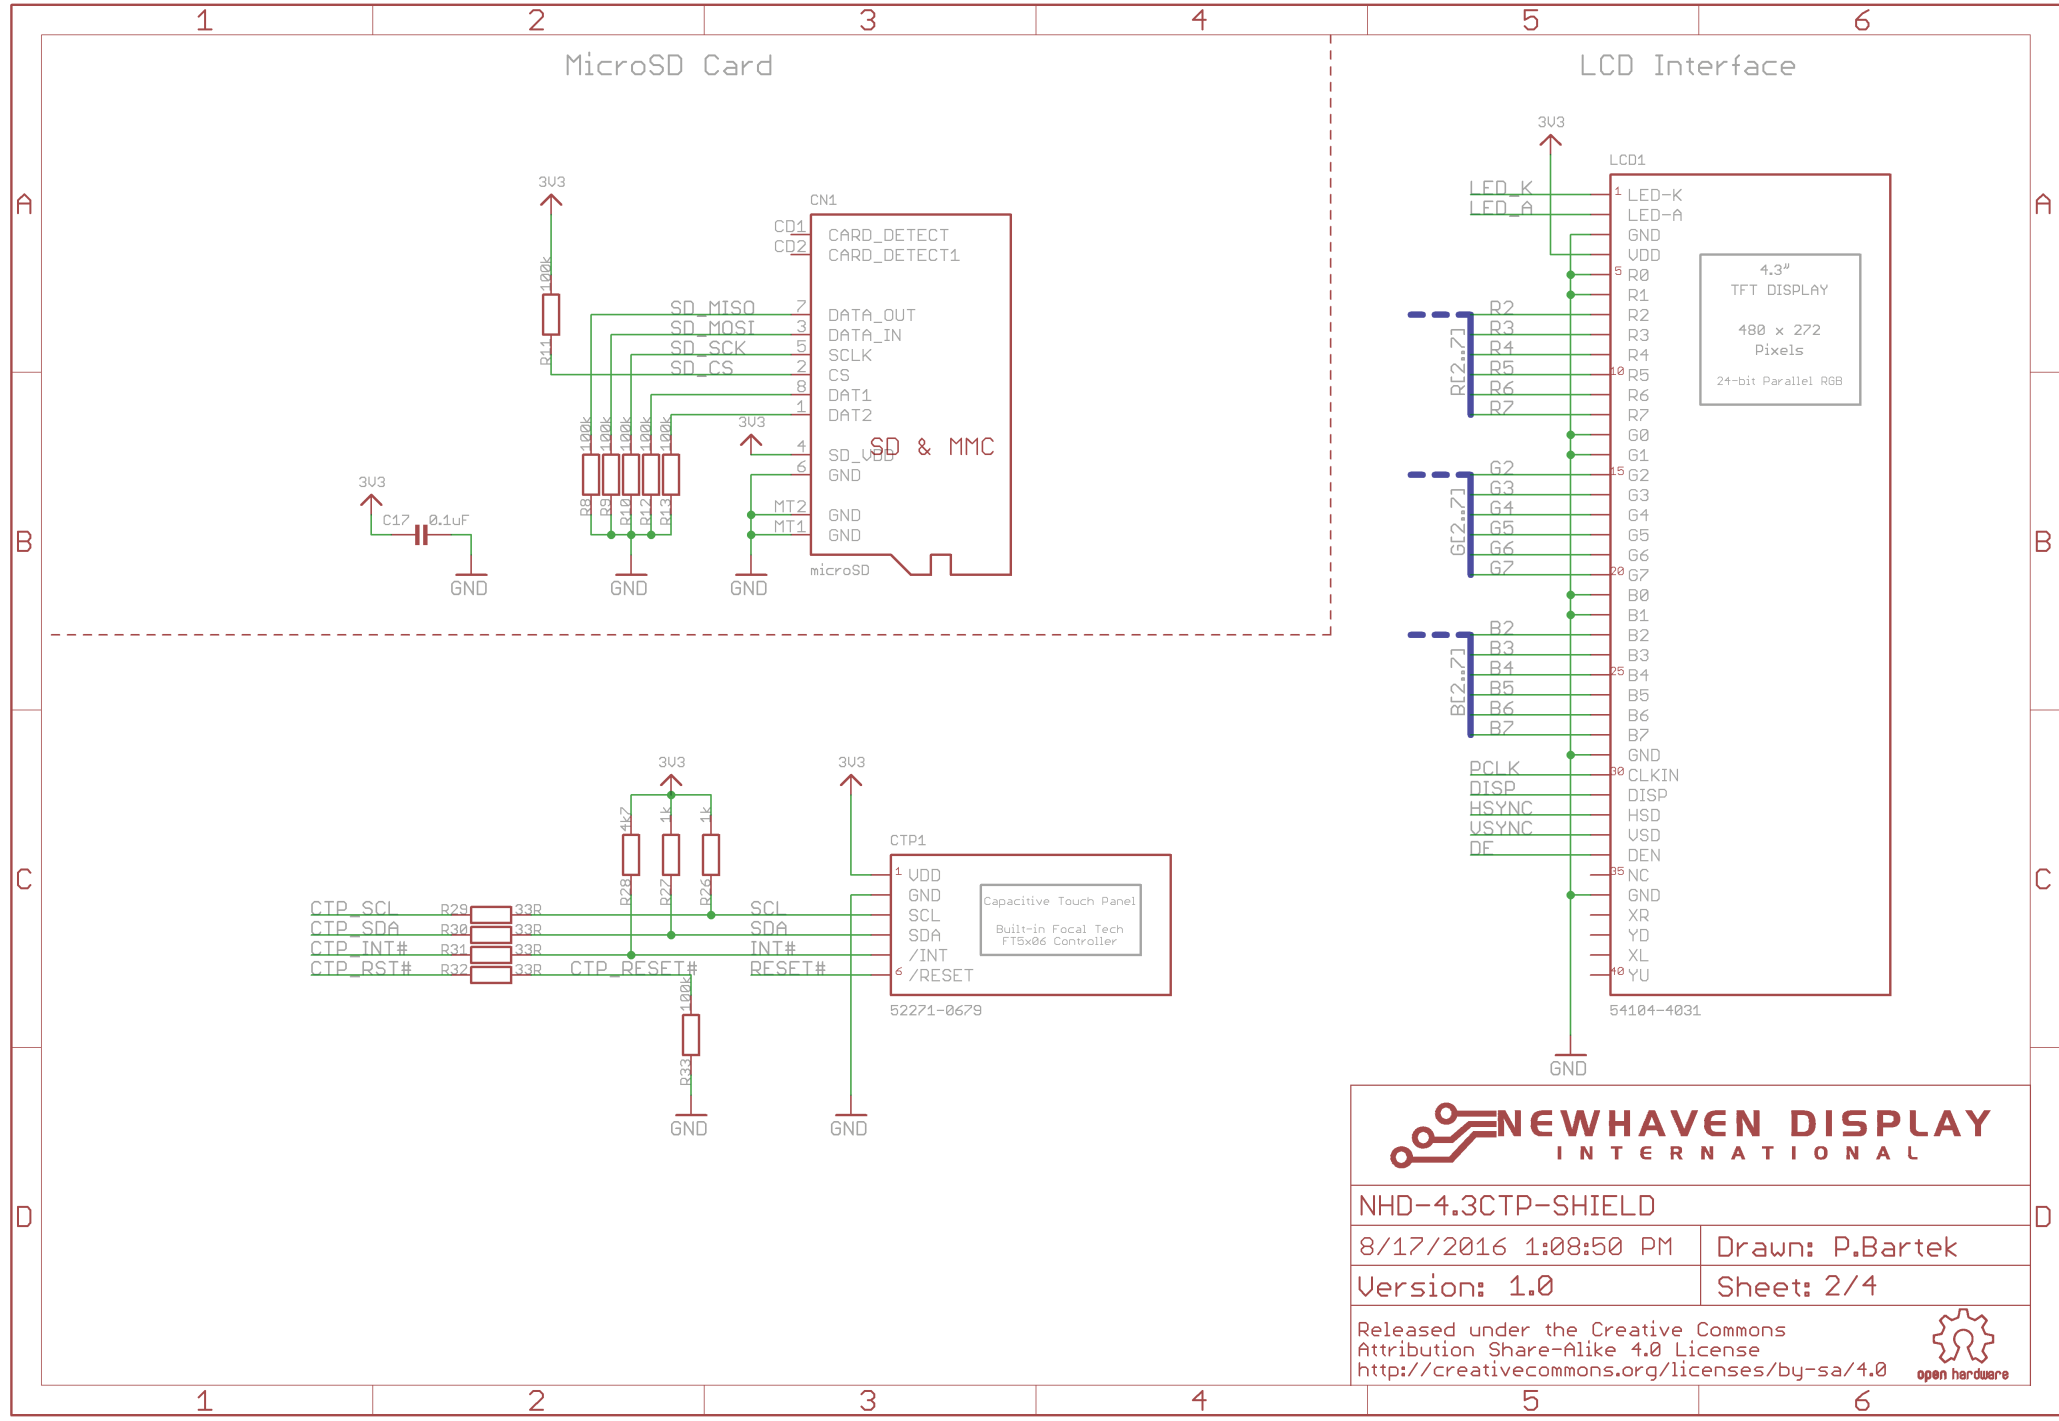

Schematic

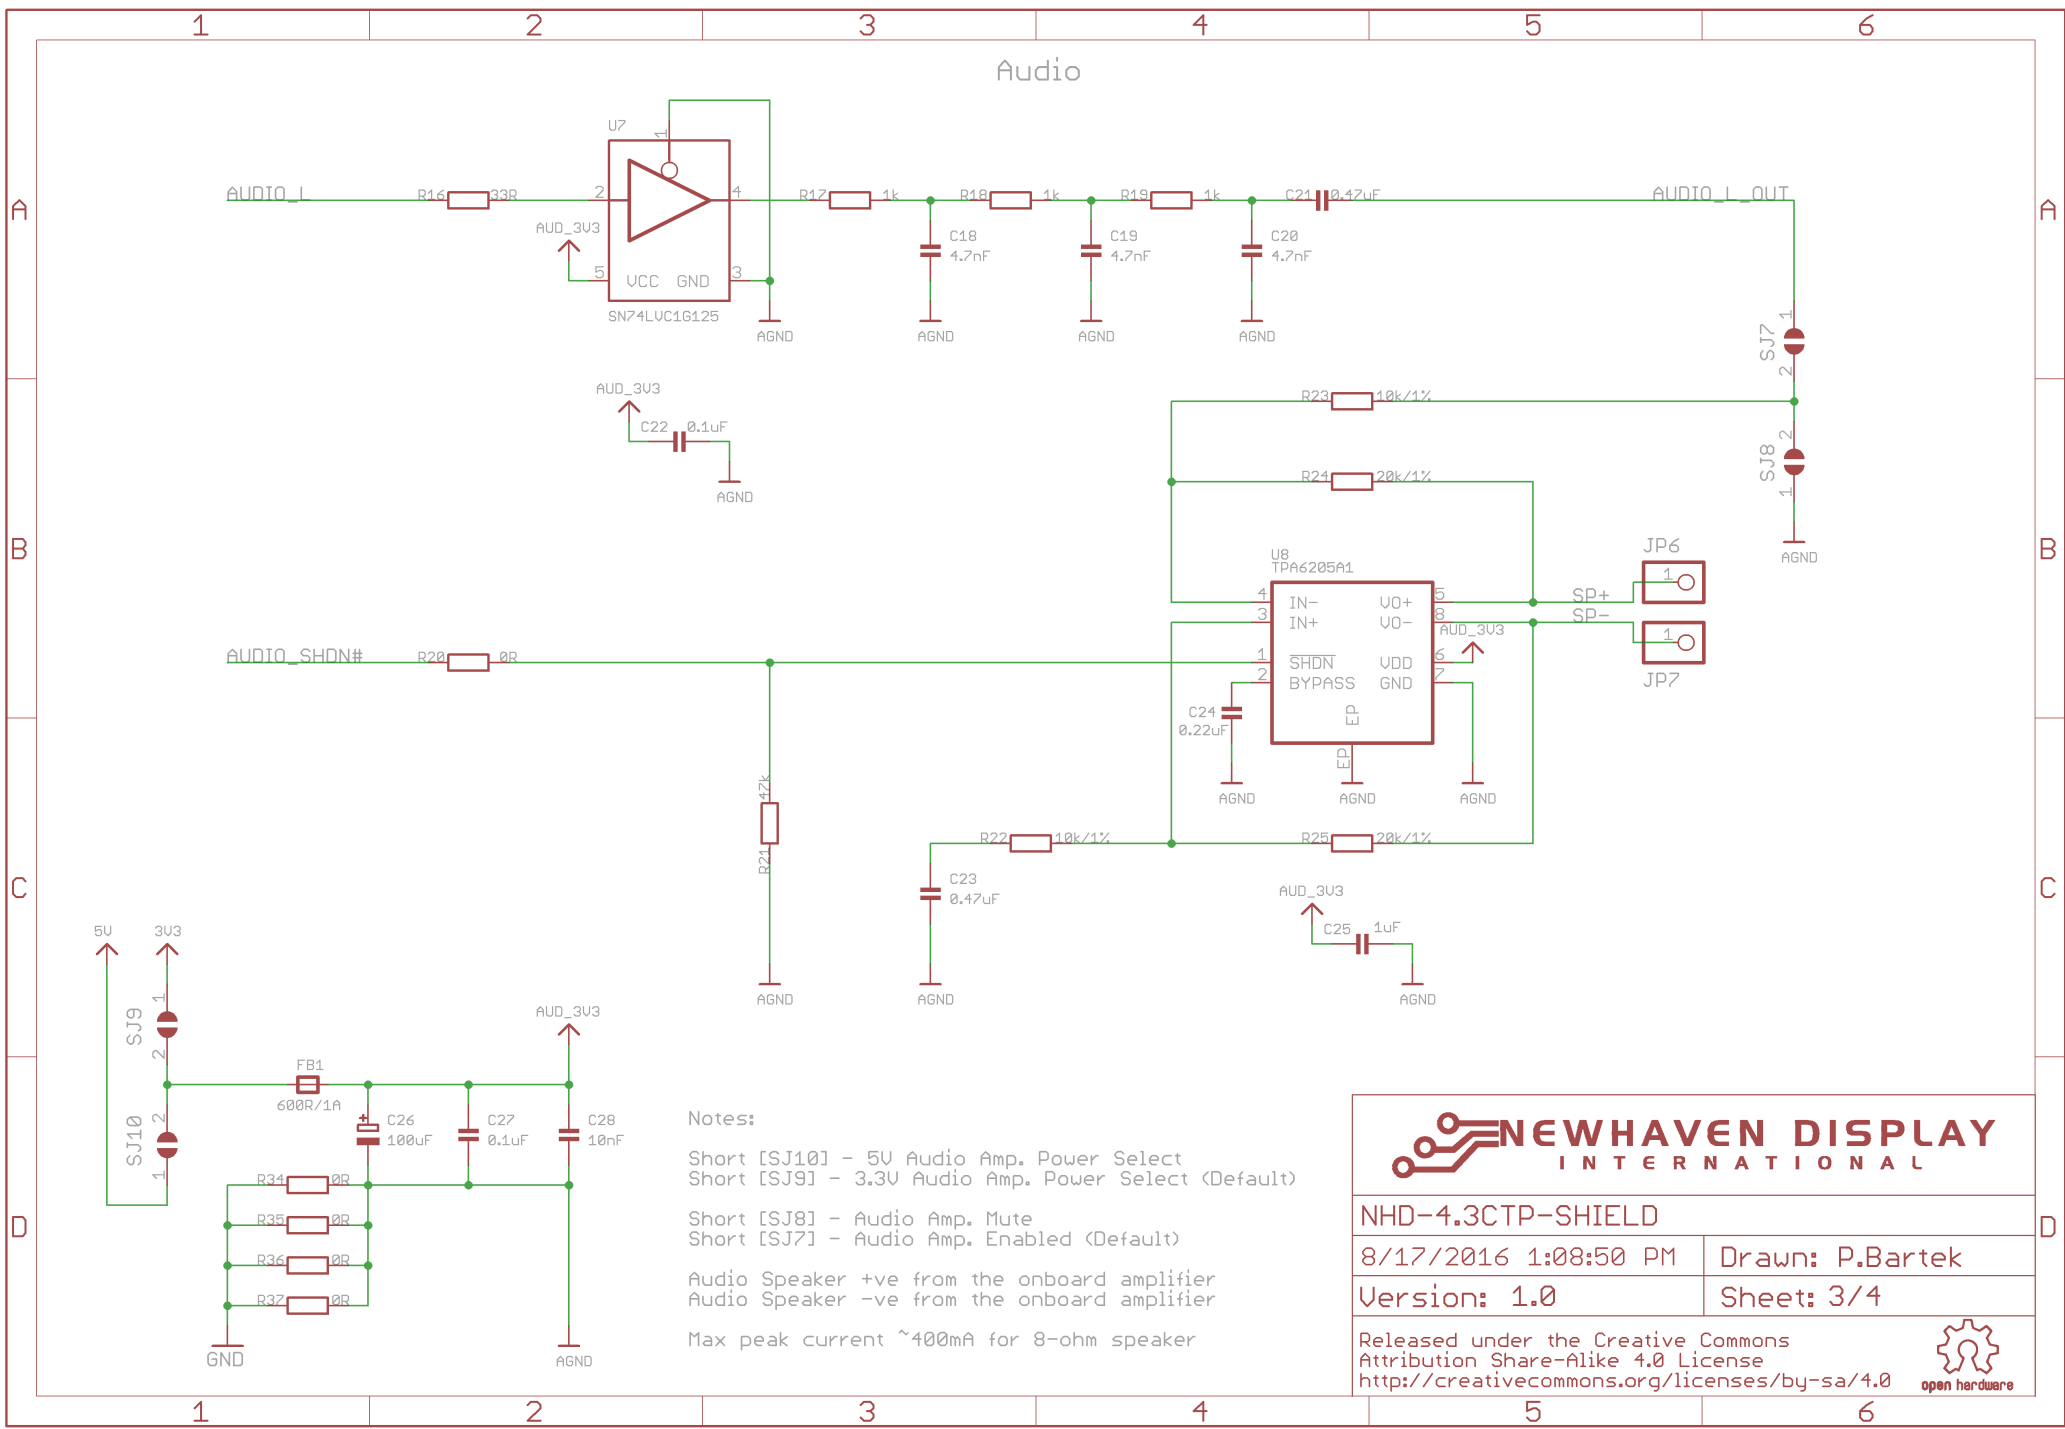

Schematic

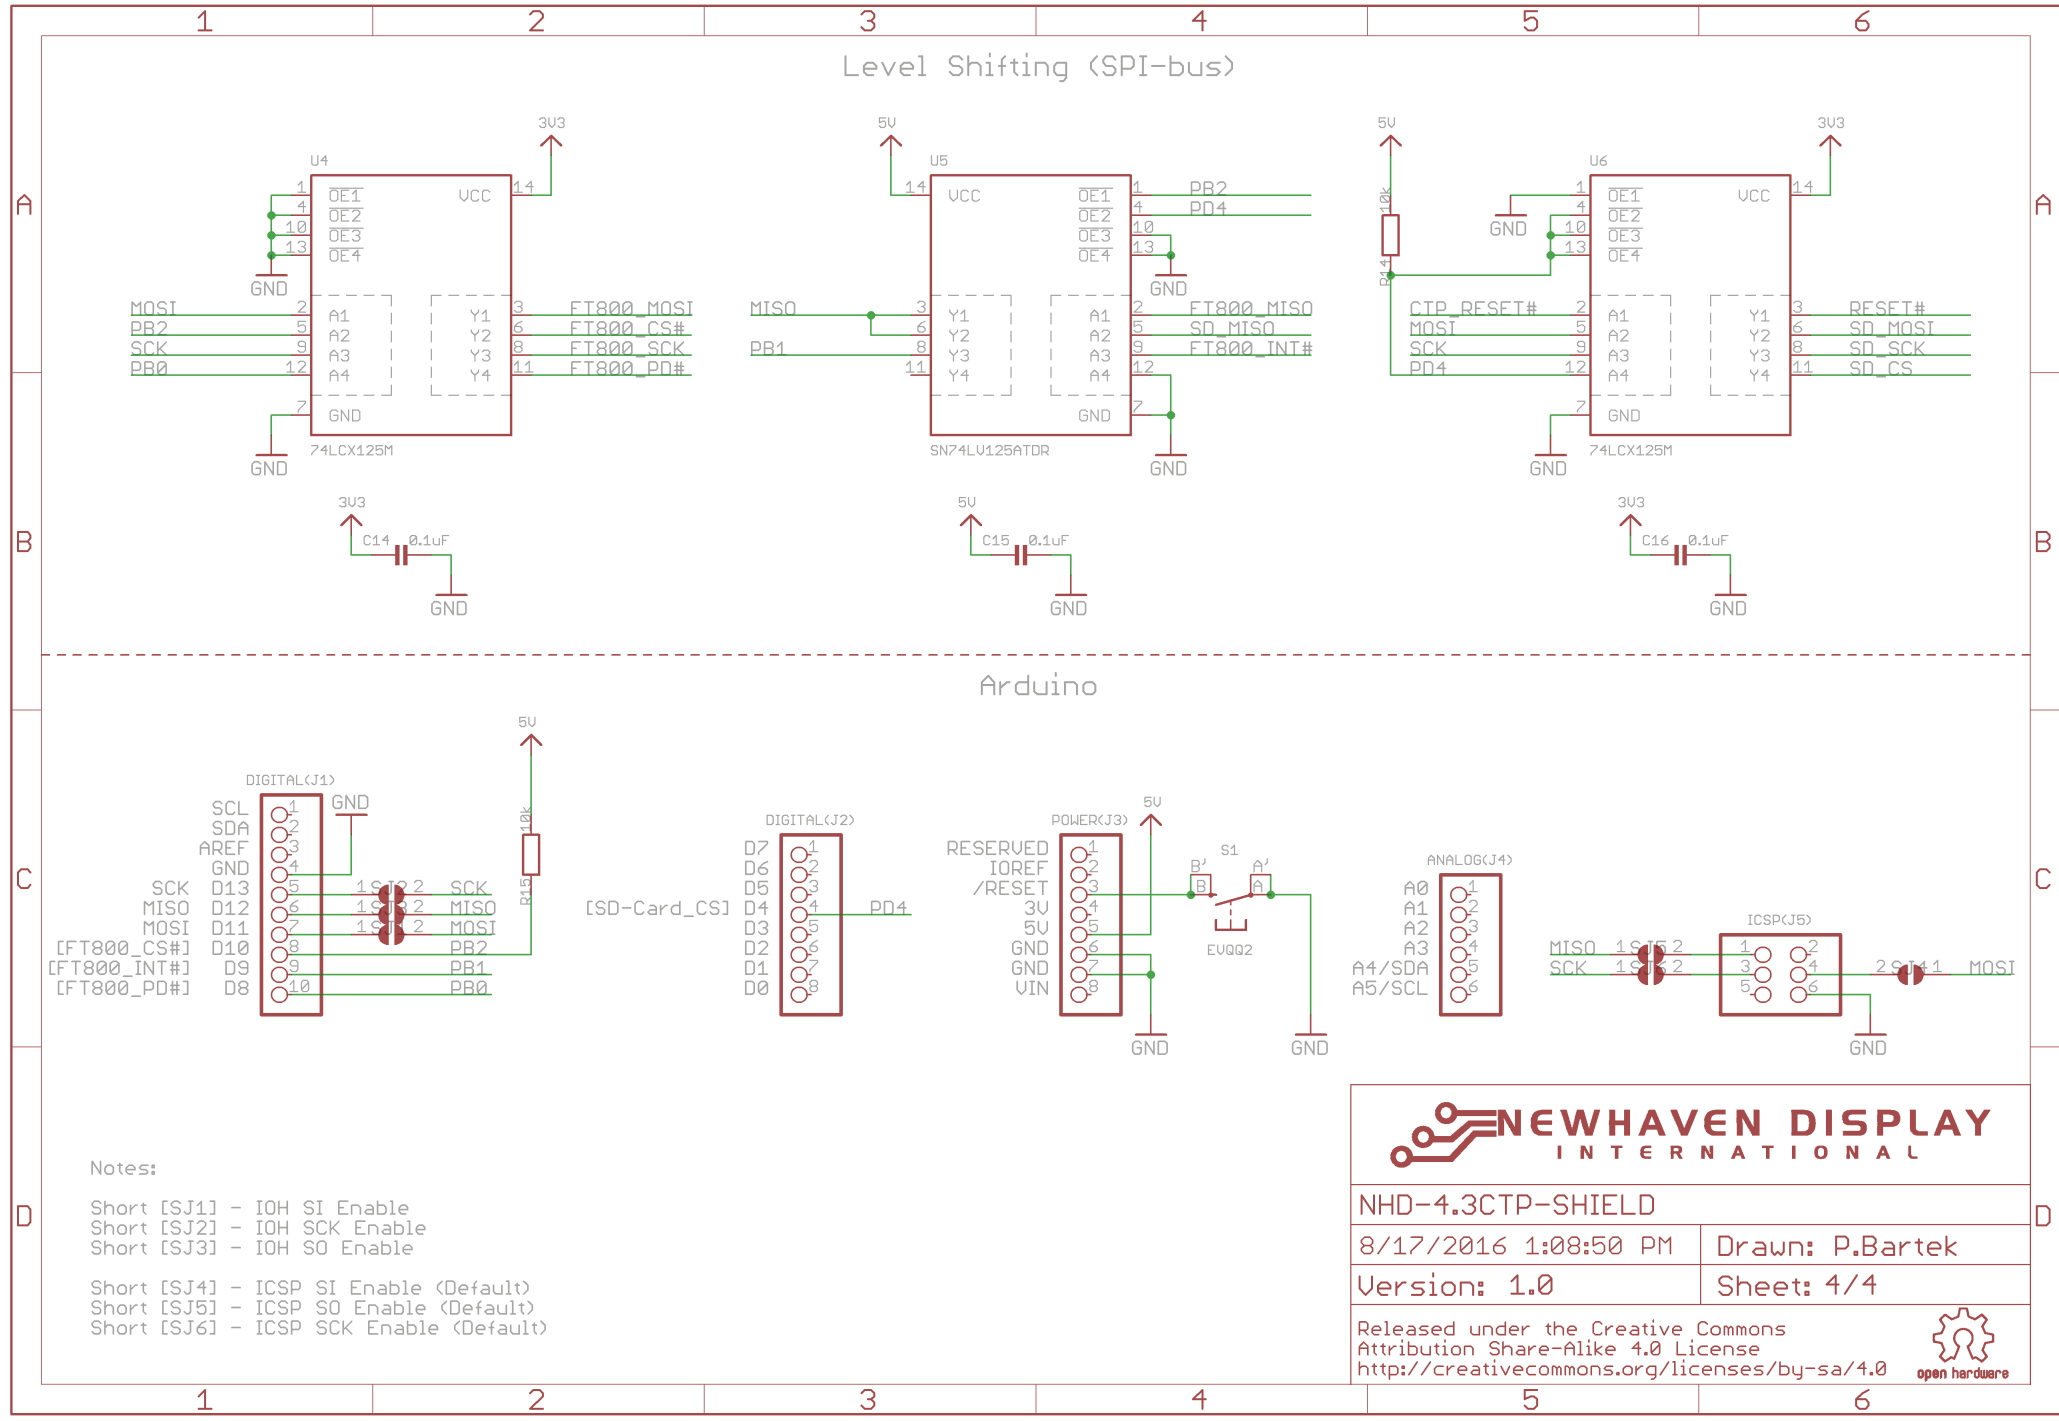

NEWHAVEN DISPLAY INTERNATIONAL

NHD-4.3CTP-SHIELD

8/17/2016 1:08:50 PM Drawn: P.Bartek

Version: 1.0 Sheet: 4/4

Released under the Creative Commons Attribution Share-Alike 4.0 License
<http://creativecommons.org/licenses/by-sa/4.0>

open hardware

Pin Description

| Arduino UNO Pin Symbol | Function Description |
|---------------------------|--------------------------------------------|
| J1 Interface | |
| SCL | No Connect |
| SDA | No Connect |
| AREF | No Connect |
| GND | Ground |
| 13 | No Connect (Short SJ2 for SPI SCK signal) |
| 12 | No Connect (Short SJ3 for SPI MISO signal) |
| 11 | No Connect (Short SJ1 for SPI MOSI signal) |
| 10 | FT801 Active LOW Chip Select signal |
| 9 | FT801 Active LOW Host Interrupt signal |
| 8 | FT801 Active LOW Power Down signal |
| J2 Interface | |
| 7 | No Connect |
| 6 | No Connect |
| 5 | No Connect |
| 4 | microSD Active LOW Chip Select signal |
| 3 | No Connect |
| 2 | No Connect |
| 1 | No Connect |
| 0 | No Connect |
| J3 Interface | |
| RESERVED | No Connect |
| IOREF | No Connect |
| RESET | No Connect |
| 3.3V | No Connect |
| 5V | Supply Voltage for Module (+5V) |
| GND | Ground |
| GND | Ground |
| Vin | No Connect |
| J4 Interface | |
| A0 | No Connect |
| A1 | No Connect |
| A2 | No Connect |
| A3 | No Connect |
| A4 | No Connect |
| A5 | No Connect |
| J5 Interface | |
| MISO | SPI MISO signal (Default) |
| 5V | No Connect |
| SCK | SPI SCK signal (Default) |
| MOSI | SPI MOSI signal (Default) |
| RESET | No Connect |
| GND | Ground |

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|-----------------|----------------------|------|------|-----------------|------|
| Operating Temperature Range | T _{OP} | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | T _{ST} | Absolute Max | -30 | - | +80 | °C |
| Supply Voltage | V _{DD} | - | 4.8 | 5.0 | 5.5 | V |
| Supply Current | I _{DD} | V _{DD} = 5V | - | 330 | 420 | mA |
| "H" level input | V _{IH} | - | 2.2 | - | V _{DD} | V |
| "L" level input | V _{IL} | - | GND | - | 0.8 | V |

Optical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|--------------------------|------|------|------|-------------------|
| Optimal Viewing Angles | Top | Cr ≥ 10 | 60 | 75 | - | ° |
| | Bottom | | 60 | 75 | - | ° |
| | Left | | 60 | 75 | - | ° |
| | Right | | 60 | 75 | - | ° |
| Contrast Ratio | Cr | - | 400 | 500 | - | - |
| Luminance | Lv | I _{LED} = 40 mA | - | 700 | - | cd/m ² |
| Response Time | Rise | T _{OP} = 25°C | - | 25 | 30 | ms |
| | Fall | - | - | 25 | 30 | ms |

Capacitive Touch Panel Material Characteristics

| Property | Requirement | Unit |
|---------------------|-------------|------|
| IC | FT5306DE4 | - |
| ITO Glass Thickness | 0.55 | mm |
| Surface Hardness | ≥6 | H |
| Transparency | 83% ± 5% | - |
| Operating Humidity | 20~90 | RH |
| Storage Humidity | 20~90 | RH |

Controller Information

TFT Controller:

Built-in FTDI FT801 Embedded Video Engine.

Please download specification at http://www.ftdichip.com/Support/Documents/DataSheets/ICs/DS_FT801.pdf


Display Information

TFT:


NHD-4.3-480272EF-ASXV#-CTP - Premium 4.3" TFT, 480x272 Pixels, 24-bit Parallel RGB Interface, w/ Projected Capacitive Touch Panel.

Please download specification at <http://www.newhavendisplay.com/specs/NHD-4.3-480272EF-ASXV-CTP.pdf>

Block Diagram

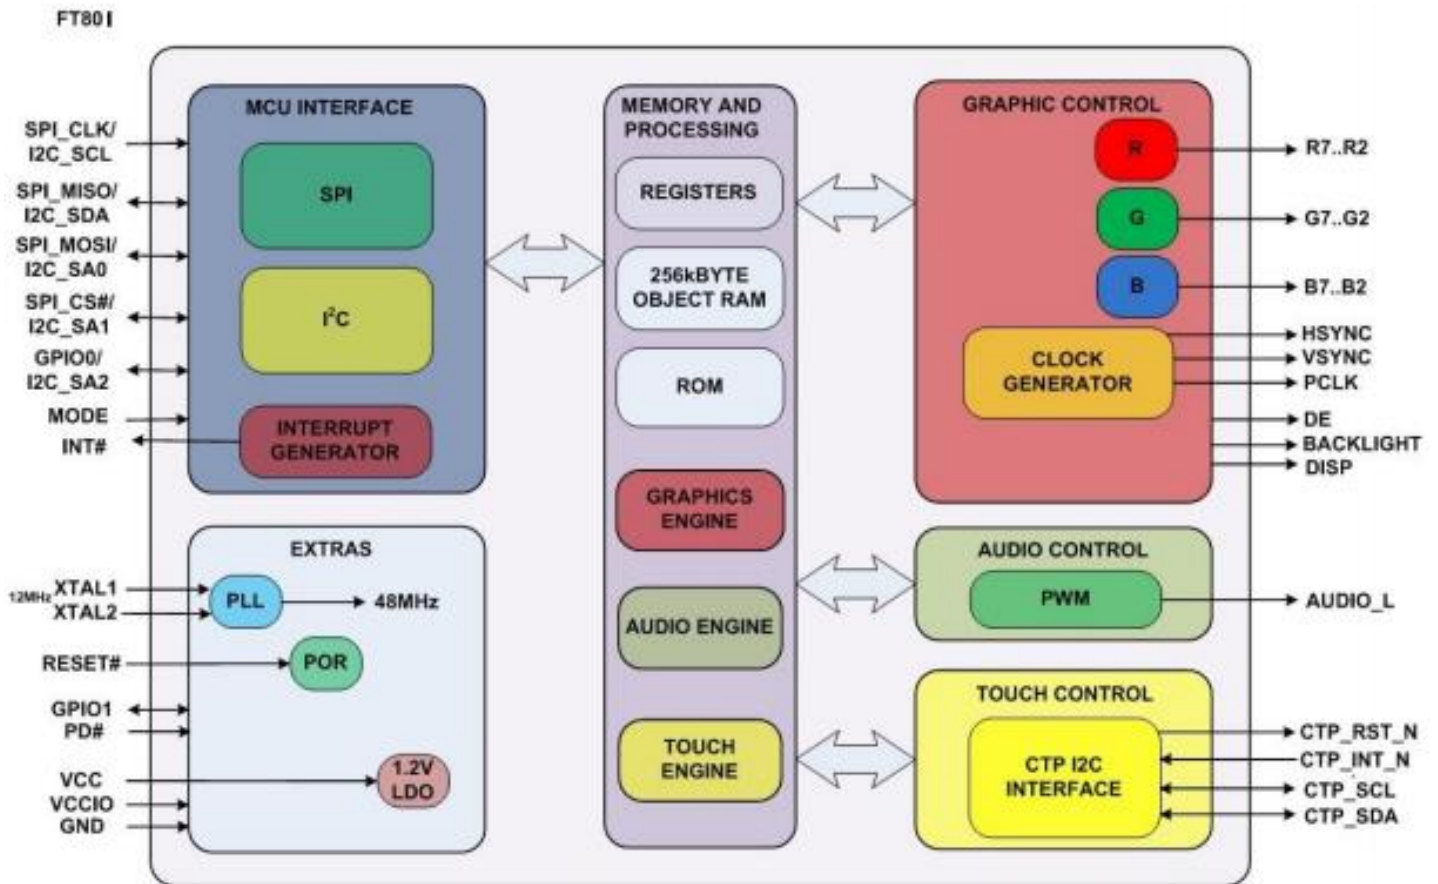

Host Interface

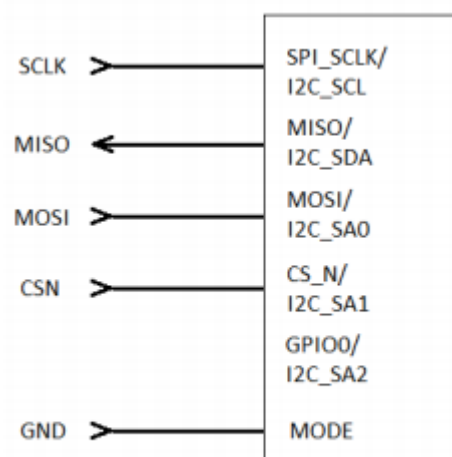


SPI Interface Connection

SPI Interface – The SPI slave interface operates up to 30MHz. Only SPI mode 0 is supported. The SPI interface is selected by default (MODE pin is internally pulled low by a 100k resistor).

Timing Characteristics

SPI Interface:

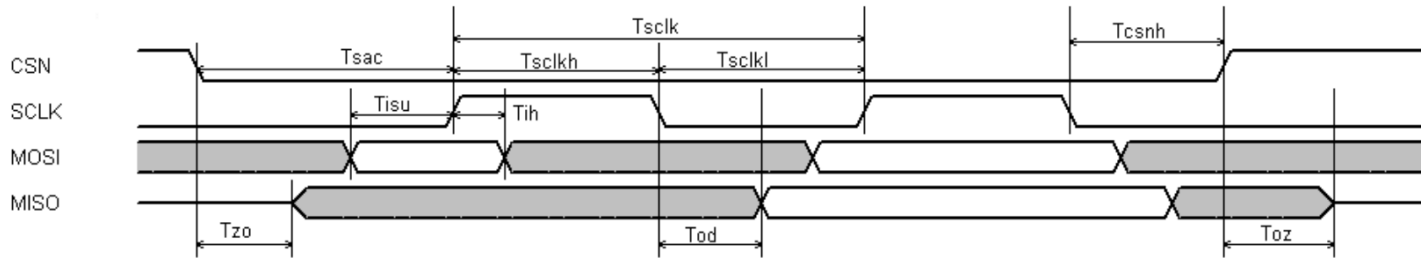

| Parameter | Description | VCC(I/O)=1.8V | | VCC(I/O)=2.5V | | VCC(I/O)=3.3V | | Units |
|------------|-------------------------|---------------|-----|---------------|-----|---------------|-----|-------|
| | | Min | Max | Min | Max | Min | Max | |
| T_{sc} | SPI clock period | 60 | - | 40 | - | 33 | - | ns |
| T_{scLl} | SPI clock low duration | 25 | - | 16 | - | 13 | - | ns |
| T_{scLh} | SPI clock high duration | 25 | - | 16 | - | 13 | - | ns |
| T_{sac} | SPI access time | 16 | - | 16 | - | 16 | - | ns |
| T_{isu} | Input Setup | 12 | - | 11 | - | 11 | - | ns |
| T_{ih} | Input Hold | 3 | - | 3 | - | 3 | - | ns |
| T_{zo} | Output enable delay | 0 | 30 | 0 | 20 | 0 | 16 | ns |
| T_{oz} | Output disable delay | 0 | 30 | 0 | 20 | 0 | 16 | ns |
| T_{od} | Output data delay | 0 | 24 | 0 | 15 | 0 | 12 | ns |
| T_{csnh} | CSN hold time | 0 | - | 0 | - | 0 | - | ns |

For more information about FT801 controller please go to official FT801 Datasheet.

http://www.ftdichip.com/Support/Documents/DataSheets/ICs/DS_FT801.pdf

Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C , 96hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C , 96hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +70°C , 96hrs | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -20°C , 96hrs | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +60°C , 90% RH , 96hrs | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | -20°C,30min -> 25°C,5min ->70°C,30min = 1 cycle 10 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-55Hz , 15mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes | 3 |
| Static electricity test | Endurance test applying electric static discharge. | VS=800V, RS=1.5kΩ, CS=100pF One time | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information

See Terms & Conditions at http://www.newhavendisplay.com/index.php?main_page=terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Newhaven Display:](#)

[NHD-4.3CTP-SHIELD-V](#)