

- Rectangular, height 60 mm
- Plastic, PBT-GF30-V0
- Factor 1 for all metals
- Increased switching distance
- Protection class IP68
- Resistant to magnetic fields
- Extended temperature range
- Auto-compensation protects against pre-attenuation
- One-sided fitting possible
- 4-wire DC, 10...65 VDC
- Changeover contact, PNP output
- Male M12 x 1

Type code NI100U-K90SR-VP4X2-H1141
Ident no. 1625844


Rated operating distance S_n 100 mm
Mounting condition non-flush, partially embeddable
Assured sensing range $\leq (0,81 \times S_n)$ mm
Repeatability $\leq 2\%$ of full scale
Temperature drift 10 %
 $\leq \pm 15\%$, $\leq -25^\circ\text{C}$ v $\geq +70^\circ\text{C}$
Hysteresis 3...15 %
Ambient temperature -30...+85 °C

Operating voltage 10...65VDC
Residual ripple $\leq 10\%$ U_{ss}
DC rated operational current ≤ 200 mA
No-load current I_0 ≤ 15 mA
Residual current ≤ 0.1 mA
Rated insulation voltage ≤ 0.5 kV
Short-circuit protection yes
Voltage drop at I_0 ≤ 1.8 V
Wire breakage / Reverse polarity protection yes/ complete
Output function 4-wire, changeover contact, PNP
Protection class IP68
Switching frequency 0.25 kHz

Design rectangular, K90SR
Dimensions 130 x 75 x 60 mm
Housing material plastic, PBT
Connection male, M12 x 1
Vibration resistance 55 Hz (1 mm)
Shock resistance 30 g (11 ms)
Protection class IP68
MTTF 874 years acc. to SN 29500 (Ed. 99) 40 °C

Power-on indication LED green
Switching state LED yellow

Wiring diagram

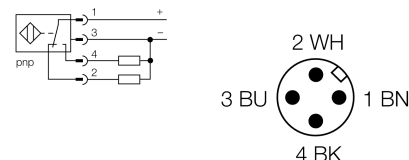


Functional principle


Inductive sensors detect metal objects contactless and wear-free. Due to the patented multi-coil system, uprox[®]+ sensors have distinct advantages over conventional sensors. They excel in largest switching distances, maximum flexibility and operational reliability as well as efficient standardization.

Distance D	270 mm
Distance W	300 mm
Distance S	1 x B
Distance G	600 mm
Distance A	100 mm
Distance C	200 mm

Width of the active face B	90 mm
----------------------------	-------

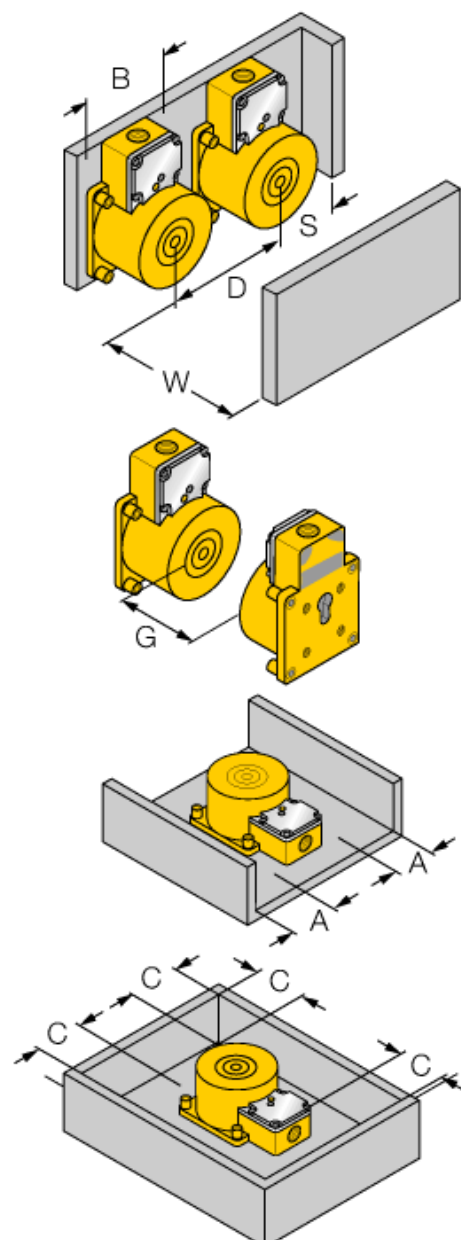

1-side flush mounting

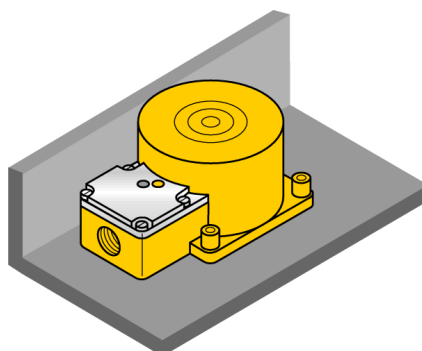

1-side mounting:

Sr = 70 mm