

OxiCap® NOS Low ESR Series



Niobium Oxide Capacitor



FEATURES

- Low ESR NbO capacitors
- Non-burn safe technology
- Reliability level: 0.2%/1000 hrs.
- CV range: 10-1000µF / 1.8-8V
- 9 case sizes available
- IBM global approval received in 2004
- Elektra Award received in 2005
- Meets requirements of AEC-Q200
- -55 to +125°C operation temperature

APPLICATIONS

- Medium power DC/DC for transportation and automotive industry



LEAD-FREE
LEAD-FREE COMPATIBLE
COMPONENT




RoHS
COMPLIANT



NON-BURN
NON-SMOKE




Elektra Award
2005

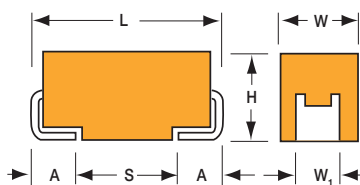

MARKING

A, B, C, D, E, V, W, X, Y CASE



CASE DIMENSIONS: millimeters (inches)

Code	EIA Code	EIA Metric	L±0.20 (0.008)	W±0.20 (0.008) -0.10 (0.004)	H±0.20 (0.008) -0.10 (0.004)	W ₁ ±0.20 (0.008)	A±0.30 (0.012) -0.20 (0.008)	S Min.
A	1206	3216-18	3.20 (0.126)	1.60 (0.063)	1.60 (0.063)	1.20 (0.047)	0.80 (0.031)	1.10 (0.043)
B	1210	3528-21	3.50 (0.138)	2.80 (0.110)	1.90 (0.075)	2.20 (0.087)	0.80 (0.031)	1.40 (0.055)
C	2312	6032-28	6.00 (0.236)	3.20 (0.126)	2.60 (0.102)	2.20 (0.087)	1.30 (0.051)	2.90 (0.114)
D	2917	7343-31	7.30 (0.287)	4.30 (0.169)	2.90 (0.114)	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)
E	2917	7343-43	7.30 (0.287)	4.30 (0.169)	4.10 (0.162)	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)
V	2924	7361-38	7.30 (0.287)	6.10 (0.240)	3.55 (0.140)	3.10 (0.120)	1.30 (0.051)	4.40 (0.173)
W	2312	6032-15	6.00 (0.236)	3.20 (0.126)	1.50 (0.059) max.	2.20 (0.087)	1.30 (0.051)	2.90 (0.114)
X	2917	7343-15	7.30 (0.287)	4.30 (0.169)	1.50 (0.059) max.	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)
Y	2917	7343-20	7.30 (0.287)	4.30 (0.169)	2.00 (0.079) max.	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)

W₁ dimension applies to the termination width for A dimensional area only.

HOW TO ORDER

NOS

Type

D

Case Size
See table above

107

Capacitance Code
1st two digits represent significant figures, 3rd digit represents multiplier in pF

M

Tolerance
M=±20%

006

Rated DC Voltage
001 = 1.8Vdc
002 = 2.5Vdc
004 = 4Vdc
006 = 6.3Vdc
008 = 8Vdc

R

Packaging
R = Pure Tin 7" Reel
S = Pure Tin 13" Reel

0100

ESR in mΩ

—

Additional characters may be added for special requirements

V = Dry pack Option (selected codes only) with exception of D, E, X, Y, V cases

TECHNICAL SPECIFICATIONS

Technical Data:

All technical data relate to an ambient temperature of +25°C is not stated

Capacitance Range: 10 µF to 1000 µF

Capacitance Tolerance: ±20%

Leakage Current DCL: 0.02CV

Rated Voltage DC (V _R)	≤ +85°C:	1.8	2.5	4	6.3	8	
Category Voltage (V _C)	≤ +105°C:	1.2	1.7	2.7	4	7	
Category Voltage (V _C)	≤ +125°C:	0.9	1.3	2	3	4	
Surge Voltage (V _S)	≤ +85°C:	2.3	3.3	5.2	8	10	
Surge Voltage (V _S)	≤ +105°C:	1.6	2.2	3.4	5	8	
Surge Voltage (V _S)	≤ +125°C:	1.2	1.7	2.6	4	5.3	

Temperature Range: -55°C to +125°C

Reliability: 0.2% per 1000 hours at 85°C, V_R, 0.1Ω/V series impedance, 60% confidence level

Meets requirements of AEC-Q200

OxiCap® NOS Low ESR Series



Niobium Oxide Capacitor

CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage DC (V _R) to 85°C				
µF	Code	1.8V (x)	2.5V (e)	4.0V (G)	6.3V (J)	8V (P)
10	106				A(800,1000,2000,2200)	A(2200) B(1000)
15	156			A(1500,2000)	B(600,2000)	B(2000)
22	226		A(900,1900)	B(600,1900)	B(600,1900)	B(700,1800) C(500)
33	336		B(1700)	B(600,1700)	B(600,1700) C(500) W(250,500)	C(500)
47	476		B(500,1600)	B(500,1600) C(300,500) W(150,500)	B(500,800) C(300,500)	C(400)
68	686		C(200,500) W(150,400)	C(200,500)	C(75,200,500) X(100,500) Y(100,500)	C(500)
100	107	B(350,1400) W(150,400)	C(150,400)	C(70,150,400) X(100,400)	C(150,400) D(80,100,400) Y(100,400)	D(400)
150	157	C(400)	C(65,150,400) X(100,400)	C(90,150,400) Y(100,400)	D(50,70,100,400) Y(100,400)	
220	227	C(125,400) X(100,400)	C(80,125,400) Y(100,400)	D(40,60,100,400) Y(100,400)	D(45,60,100,400) E(80,100,400)	
330	337	Y(100,300)	D(35,50,100,300) Y(100,300)	D(35,55,100,300) E(100) Y(150,300)	E(80,100,300)	
470	477	Y(100,300)	D(35,55,100,300) E(100,300)	D(100,300) E(75,100,300)	V(75,300)	
680	687		E(60,300)	V(75,300)		
1000	108		V(50,300)			

Available Ratings, (ESR ratings in mOhms in brackets)

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

OxiCap® NOS Low ESR Series



Niobium Oxide Capacitor

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Capacitance (µF)	Rated Voltage (V)	Rated Temperature (°C)	Category Voltage (V)	Category Temperature (°C)	DCL Max. (µA)	DF Max. (%)	ESR Max. @ 100kHz (mΩ)	MSL	100kHz RMS Current (A)		
											25°C	85°C	125°C
1.8 Volt @ 85°C													
NOSB107M001#0350	B	100	1.8	85	0.9	125	3.6	6	350	1	0.540	0.486	0.216
NOSB107M001#1400	B	100	1.8	85	0.9	125	3.6	6	1400	1	0.270	0.243	0.108
NOSW107M001#0150	W	100	1.8	85	0.9	125	3.6	6	150	1	0.849	0.764	0.339
NOSW107M001#0400	W	100	1.8	85	0.9	125	3.6	6	400	1	0.520	0.468	0.208
NOSC157M001#0400	C	150	1.8	85	0.9	125	5.4	8	400	1	0.574	0.517	0.230
NOSC227M001#0125	C	220	1.8	85	0.9	125	8.0	8	125	1	1.028	0.925	0.411
NOSC227M001#0400	C	220	1.8	85	0.9	125	8.0	8	400	1	0.574	0.517	0.230
NOSX227M001#0100	X	220	1.8	85	0.9	125	8.0	8	100	3	1.095	0.986	0.438
NOSX227M001#0400	X	220	1.8	85	0.9	125	8.0	8	400	3	0.548	0.493	0.219
NOSY337M001#0100	Y	330	1.8	85	0.9	125	11.9	8	100	3	1.225	1.102	0.490
NOSY337M001#0300	Y	330	1.8	85	0.9	125	11.9	8	300	3	0.707	0.636	0.283
NOSY477M001#0100	Y	470	1.8	85	0.9	125	17.0	8	100	3	1.225	1.102	0.490
NOSY477M001#0300	Y	470	1.8	85	0.9	125	17.0	8	300	3	0.707	0.636	0.283
2.5 Volt @ 85°C													
NOSA226M002#0900	A	22	2.5	85	1.3	125	1.1	6	900	1	0.316	0.285	0.126
NOSA226M002#1900	A	22	2.5	85	1.3	125	1.1	6	1900	1	0.218	0.196	0.087
NOSB336M002#1700	B	33	2.5	85	1.3	125	1.7	6	1700	1	0.245	0.220	0.098
NOSB476M002#0500	B	47	2.5	85	1.3	125	2.4	6	500	1	0.452	0.406	0.181
NOSB476M002#1600	B	47	2.5	85	1.3	125	2.4	6	1600	1	0.252	0.227	0.101
NOSC686M002#0200	C	68	2.5	85	1.3	125	3.4	6	200	1	0.812	0.731	0.325
NOSC686M002#0500	C	68	2.5	85	1.3	125	3.4	6	500	1	0.514	0.462	0.206
NOSW686M002#0150	W	68	2.5	85	1.3	125	3.4	6	150	1	0.849	0.764	0.339
NOSW686M002#0400	W	68	2.5	85	1.3	125	3.4	6	400	1	0.520	0.468	0.208
NOSC107M002#0150	C	100	2.5	85	1.3	125	5.0	6	150	1	0.938	0.844	0.375
NOSC107M002#0400	C	100	2.5	85	1.3	125	5.0	6	400	1	0.574	0.517	0.230
NOSC157M002#0065	C	150	2.5	85	1.3	125	7.5	6	65	1	1.425	1.283	0.570
NOSC157M002#0150	C	150	2.5	85	1.3	125	7.5	6	150	1	0.938	0.844	0.375
NOSC157M002#0400	C	150	2.5	85	1.3	125	7.5	6	400	1	0.574	0.517	0.230
NOSX157M002#0100	X	150	2.5	85	1.3	125	7.5	6	100	3	1.095	0.986	0.438
NOSX157M002#0400	X	150	2.5	85	1.3	125	7.5	6	400	3	0.548	0.493	0.219
NOSC227M002#0080	C	220	2.5	85	1.3	125	11.0	8	80	1	1.285	1.156	0.514
NOSC227M002#0125	C	220	2.5	85	1.3	125	11.0	8	125	1	1.028	0.925	0.411
NOSC227M002#0400	C	220	2.5	85	1.3	125	11.0	8	400	1	0.574	0.517	0.230
NOSY227M002#0100	Y	220	2.5	85	1.3	125	11.0	8	100	3	1.225	1.102	0.490
NOSY227M002#0400	Y	220	2.5	85	1.3	125	11.0	8	400	3	0.612	0.551	0.245
NOSD337M002#0035	D	330	2.5	85	1.3	125	16.5	10	35	3	2.268	2.041	0.907
NOSD337M002#0050	D	330	2.5	85	1.3	125	16.5	10	50	3	1.897	1.708	0.759
NOSD337M002#0100	D	330	2.5	85	1.3	125	16.5	10	100	3	1.342	1.207	0.537
NOSD337M002#0300	D	330	2.5	85	1.3	125	16.5	10	300	3	0.775	0.697	0.310
NOSY337M002#0100	Y	330	2.5	85	1.3	125	16.5	10	100	3	1.225	1.102	0.490
NOSY337M002#0300	Y	330	2.5	85	1.3	125	16.5	10	300	3	0.707	0.636	0.283
NOSD477M002#0035	D	470	2.5	85	1.3	125	23.5	12	35	3	2.268	2.041	0.907
NOSD477M002#0055	D	470	2.5	85	1.3	125	23.5	12	55	3	1.809	1.628	0.724
NOSD477M002#0100	D	470	2.5	85	1.3	125	23.5	12	100	3	1.342	1.207	0.537
NOSD477M002#0300	D	470	2.5	85	1.3	125	23.5	12	300	3	0.775	0.697	0.310
NOSE477M002#0100	E	470	2.5	85	1.3	125	23.5	10	100	3	1.407	1.266	0.563
NOSE477M002#0300	E	470	2.5	85	1.3	125	23.5	10	300	3	0.812	0.731	0.325
NOSE687M002#0060	E	680	2.5	85	1.3	125	34.0	14	60	3	1.817	1.635	0.727
NOSE687M002#0300	E	680	2.5	85	1.3	125	34.0	14	300	3	0.812	0.731	0.325
NOSV108M002#0050	V	1000	2.5	85	1.3	125	50.0	16	50	3	2.449	2.205	0.980
NOSV108M002#0300	V	1000	2.5	85	1.3	125	50.0	16	300	3	1.000	0.900	0.400
4 Volt @ 85°C													
NOSA156M004#1500	A	15	4	85	2	125	1.2	6	1500	1	0.245	0.220	0.098
NOSA156M004#2000	A	15	4	85	2	125	1.2	6	2000	1	0.212	0.191	0.085
NOSB226M004#0600	B	22	4	85	2	125	1.8	6	600	1	0.412	0.371	0.165
NOSB226M004#1900	B	22	4	85	2	125	1.8	6	1900	1	0.232	0.209	0.093
NOSB336M004#0600	B	33	4	85	2	125	2.6	6	600	1	0.412	0.371	0.165
NOSB336M004#1700	B	33	4	85	2	125	2.6	6	1700	1	0.245	0.220	0.098
NOSB476M004#0500	B	47	4	85	2	125	3.8	6	500	1	0.452	0.406	0.181
NOSB476M004#1600	B	47	4	85	2	125	3.8	6	1600	1	0.252	0.227	0.101
NOSC476M004#0300	C	47	4	85	2	125	3.8	6	300	1	0.663	0.597	0.265
NOSC476M004#0500	C	47	4	85	2	125	3.8	6	500	1	0.514	0.462	0.206
NOSW476M004#0150	W	47	4	85	2	125	3.8	6	150	1	0.849	0.764	0.339
NOSW476M004#0500	W	47	4	85	2	125	3.8	6	500	1	0.465	0.418	0.186
NOSC686M004#0200	C	68	4	85	2	125	5.4	6	200	1	0.812	0.731	0.325
NOSC686M004#0500	C	68	4	85	2	125	5.4	6	500	1	0.514	0.462	0.206
NOSC107M004#0070	C	100	4	85	2	125	8.0	6	70	1	1.373	1.236	0.549
NOSC107M004#0150	C	100	4	85	2	125	8.0	6	150	1	0.938	0.844	0.375
NOSC107M004#0400	C	100	4	85	2	125	8.0	6	400	1	0.574	0.517	0.230
NOSX107M004#0100	X	100	4	85	2	125	8.0	6	100	3	1.095	0.986	0.438

OxiCap® NOS Low ESR Series



Niobium Oxide Capacitor

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Capacitance (µF)	Rated Voltage (V)	Rated Temperature (°C)	Category Voltage (V)	Category Temperature (°C)	DCL Max. (µA)	DF Max. (%)	ESR Max. @ 100kHz (mΩ)	MSL	100kHz RMS Current (A)		
											25°C	85°C	125°C
NOSX107M004#0400	X	100	4	85	2	125	8.0	6	400	3	0.548	0.493	0.219
NOSC157M004#0090	C	150	4	85	2	125	12.0	6	90	1	1.211	1.090	0.484
NOSC157M004#0150	C	150	4	85	2	125	12.0	6	150	1	0.938	0.844	0.375
NOSC157M004#0400	C	150	4	85	2	125	12.0	6	400	1	0.574	0.517	0.230
NOSY157M004#0100	Y	150	4	85	2	125	12.0	6	100	3	1.225	1.102	0.490
NOSY157M004#0400	Y	150	4	85	2	125	12.0	6	400	3	0.612	0.551	0.245
NOSD227M004#0040	D	220	4	85	2	125	17.6	8	40	3	2.121	1.909	0.849
NOSD227M004#0060	D	220	4	85	2	125	17.6	8	60	3	1.732	1.559	0.693
NOSD227M004#0100	D	220	4	85	2	125	17.6	8	100	3	1.342	1.207	0.537
NOSD227M004#0400	D	220	4	85	2	125	17.6	8	400	3	0.671	0.604	0.268
NOSY227M004#0100	Y	220	4	85	2	125	17.6	10	100	3	1.225	1.102	0.490
NOSY227M004#0400	Y	220	4	85	2	125	17.6	10	400	3	0.612	0.551	0.245
NOSD337M004#0035	D	330	4	85	2	125	26.4	8	35	3	2.268	2.041	0.907
NOSD337M004#0055	D	330	4	85	2	125	26.4	8	55	3	1.809	1.628	0.724
NOSD337M004#0100	D	330	4	85	2	125	26.4	8	100	3	1.342	1.207	0.537
NOSD337M004#0300	D	330	4	85	2	125	26.4	8	300	3	0.775	0.697	0.310
NOSE337M004#0100	E	330	4	85	2	125	26.4	8	100	3	1.407	1.266	0.563
NOSY337M004#0150	Y	330	4	85	2	125	26.4	12	150	3	1.000	0.900	0.400
NOSY337M004#0300	Y	330	4	85	2	125	26.4	12	300	3	0.707	0.636	0.283
NOSD477M004#0100	D	470	4	85	2	125	37.6	12	100	3	1.342	1.207	0.537
NOSD477M004#0300	D	470	4	85	2	125	37.6	12	300	3	0.775	0.697	0.310
NOSE477M004#0075	E	470	4	85	2	125	37.6	12	75	3	1.625	1.462	0.650
NOSE477M004#0100	E	470	4	85	2	125	37.6	12	100	3	1.407	1.266	0.563
NOSE477M004#0300	E	470	4	85	2	125	37.6	12	300	3	0.812	0.731	0.325
NOSV687M004#0075	V	680	4	85	2	125	54.4	14	75	3	2.000	1.800	0.800
NOSV687M004#0300	V	680	4	85	2	125	54.4	14	300	3	1.000	0.900	0.400
6.3 Volt @ 85°C													
NOSA106M006#0800	A	10	6.3	85	3	125	1.2	6	800	1	0.335	0.302	0.134
NOSA106M006#1000	A	10	6.3	85	3	125	1.2	6	1000	1	0.300	0.270	0.120
NOSA106M006#2000	A	10	6.3	85	3	125	1.2	6	2000	1	0.212	0.191	0.085
NOSA106M006#2200	A	10	6.3	85	3	125	1.2	6	2200	1	0.202	0.182	0.081
NOSB156M006#0600	B	15	6.3	85	3	125	1.8	6	600	1	0.412	0.371	0.165
NOSB156M006#2000	B	15	6.3	85	3	125	1.8	6	2000	1	0.226	0.203	0.090
NOSB226M006#0600	B	22	6.3	85	3	125	2.6	6	600	1	0.412	0.371	0.165
NOSB226M006#1900	B	22	6.3	85	3	125	2.6	6	1900	1	0.232	0.209	0.093
NOSB336M006#0600	B	33	6.3	85	3	125	4.0	6	600	1	0.412	0.371	0.165
NOSB336M006#1700	B	33	6.3	85	3	125	4.0	6	1700	1	0.245	0.220	0.098
NOSC336M006#0500	C	33	6.3	85	3	125	4.0	6	500	1	0.514	0.462	0.206
NOSW336M006#0250	W	33	6.3	85	3	125	4.0	6	250	1	0.657	0.592	0.263
NOSW336M006#0500	W	33	6.3	85	3	125	4.0	6	500	1	0.465	0.418	0.186
NOSB476M006#0500	B	47	6.3	85	3	125	5.6	6	500	1	0.452	0.406	0.181
NOSB476M006#0800	B	47	6.3	85	3	125	5.6	6	800	1	0.357	0.321	0.143
NOSC476M006#0300	C	47	6.3	85	3	125	5.7	6	300	1	0.663	0.597	0.265
NOSC476M006#0500	C	47	6.3	85	3	125	5.7	6	500	1	0.514	0.462	0.206
NOSC686M006#0075	C	68	6.3	85	3	125	8.2	6	75	1	1.327	1.194	0.531
NOSC686M006#0200	C	68	6.3	85	3	125	8.2	6	200	1	0.812	0.731	0.325
NOSC686M006#0500	C	68	6.3	85	3	125	8.2	6	500	1	0.514	0.462	0.206
NOSX686M006#0100	X	68	6.3	85	3	125	8.2	6	100	3	1.095	0.986	0.438
NOSX686M006#0500	X	68	6.3	85	3	125	8.2	6	500	3	0.490	0.441	0.196
NOSY686M006#0100	Y	68	6.3	85	3	125	8.2	6	100	3	1.225	1.102	0.490
NOSY686M006#0500	Y	68	6.3	85	3	125	8.2	6	500	3	0.548	0.493	0.219
NOSC107M006#0150	C	100	6.3	85	3	125	12.0	8	150	1	0.938	0.844	0.375
NOSC107M006#0400	C	100	6.3	85	3	125	12.0	8	400	1	0.574	0.517	0.230
NOSD107M006#0080	D	100	6.3	85	3	125	12.0	6	80	3	1.500	1.350	0.600
NOSD107M006#0100	D	100	6.3	85	3	125	12.0	6	100	3	1.342	1.207	0.537
NOSD107M006#0400	D	100	6.3	85	3	125	12.0	6	400	3	0.671	0.604	0.268
NOSY107M006#0100	Y	100	6.3	85	3	125	12.0	6	100	3	1.225	1.102	0.490
NOSY107M006#0400	Y	100	6.3	85	3	125	12.0	6	400	3	0.612	0.551	0.245
NOSD157M006#0050	D	150	6.3	85	3	125	18.0	6	50	3	1.897	1.708	0.759
NOSD157M006#0070	D	150	6.3	85	3	125	18.0	6	70	3	1.604	1.443	0.641
NOSD157M006#0100	D	150	6.3	85	3	125	18.0	6	100	3	1.342	1.207	0.537
NOSD157M006#0400	D	150	6.3	85	3	125	18.0	6	400	3	0.671	0.604	0.268
NOSY157M006#0100	Y	150	6.3	85	3	125	18.0	6	100	3	1.225	1.102	0.490
NOSY157M006#0400	Y	150	6.3	85	3	125	18.0	6	400	3	0.612	0.551	0.245
NOSD227M006#0045	D	220	6.3	85	3	125	26.4	8	45	3	2.000	1.800	0.800
NOSD227M006#0060	D	220	6.3	85	3	125	26.4	8	60	3	1.732	1.559	0.693
NOSD227M006#0100	D	220	6.3	85	3	125	26.4	8	100	3	1.342	1.207	0.537
NOSD227M006#0400	D	220	6.3	85	3	125	26.4	8	400	3	0.671	0.604	0.268
NOSE227M006#0080	E	220	6.3	85	3	125	26.4	12	80	3	1.573	1.416	0.629
NOSE227M006#0100	E	220	6.3	85	3	125	26.4	12	100	3	1.407	1.266	0.563
NOSE227M006#0400	E	220	6.3	85	3	125	26.4	12	400	3	0.704	0.633	0.281

OxiCap® NOS Low ESR Series



Niobium Oxide Capacitor

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	Rated Temperature (°C)	Category Voltage (V)	Category Temperature (°C)	DCL Max. (μA)	DF Max. (%)	ESR Max. @ 100kHz (mΩ)	MSL	100kHz RMS Current (A)		
											25°C	85°C	125°C
NOSE337M006#0080	E	330	6.3	85	3	125	39.6	12	80	3	1.573	1.416	0.629
NOSE337M006#0100	E	330	6.3	85	3	125	39.6	12	100	3	1.407	1.266	0.563
NOSE337M006#0300	E	330	6.3	85	3	125	39.6	12	300	3	0.812	0.731	0.325
NOSV477M006#0075	V	470	6.3	85	3	125	56.4	14	75	3	2.000	1.800	0.800
NOSV477M006#0300	V	470	6.3	85	3	125	56.4	14	300	3	1.000	0.900	0.400
8 Volt @ 85°C													
NOSA106M008#2200	A	10	8	85	4	125	1.6	10	2200	1	0.202	0.182	0.081
NOSB106M008#1000	B	10	8	85	4	125	1.6	10	1000	1	0.319	0.287	0.128
NOSB156M008#2000	B	15	8	85	4	125	2.4	10	2000	1	0.226	0.203	0.090
NOSB226M008#0700	B	22	8	85	4	125	3.5	10	700	1	0.382	0.344	0.153
NOSB226M008#1800	B	22	8	85	4	125	3.5	10	1800	1	0.238	0.214	0.095
NOSC226M008#0500	C	22	8	85	4	125	3.5	10	500	1	0.514	0.462	0.206
NOSC336M008#0500	C	33	8	85	4	125	5.3	10	500	1	0.514	0.462	0.206
NOSC476M008#0400	C	47	8	85	4	125	7.5	10	400	1	0.574	0.517	0.230
NOSC686M008#0500	C	68	8	85	4	125	11.0	16	500	1	0.514	0.462	0.206
NOSD107M008#0400	D	100	8	85	4	125	16.0	16	400	3	0.671	0.604	0.268

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

The EIA & CECC standards for capacitors allow an ESR movement to 1.25 times catalog limit post mounting.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.

QUALIFICATION TABLE

TEST	NOS series (Temperature range -55°C to +125°C)									
	Condition			Characteristics						
Endurance	Determine after application of rated voltage for 2000 +48/-0 hours at 85±2°C and then leaving 1-2 hours at room temperature. Also determine of 125°C temperature, category voltage for 2000 +48/-0 hours and then leaving 1-2 hours at room temperature. Power supply impedance to be ≤0.1Ω/V.			Visual examination	no visible damage					
				DCL	initial limit					
				ΔC/C	within ±10% of initial value					
				DF	initial limit					
				ESR	1.25 x initial limit					
Storage Life	125°C, 0V, 2000h			Visual examination	no visible damage					
				DCL	initial limit					
				ΔC/C	within ±10% of initial value					
				DF	initial limit					
				ESR	1.25 x initial limit					
Biased Humidity	Determine after leaving for 1000 hours at 85±2°C, 85% relative humidity and rated voltage and then recovery 1-2 hours at room temperature.			Visual examination	no visible damage					
				DCL	2 x initial limit					
				ΔC/C	within ±10% of initial value					
				DF	1.2 x initial limit					
				ESR	1.25 x initial limit					
Temperature Stability	Step	Temperature°C	Duration(min)		+20°C	-55°C	+20°C	+85°C	+125°C	+20°C
	1	+20±2	15	DCL	IL*	n/a	IL*	12 x IL*	15 x IL*	IL*
	2	-55+0/-3	15	ΔC/C	n/a	+0/-10%	±5%	+10/-0%	+12/-0%	±5%
	3	+20±2	15	DF	IL*	1.5 x IL*	IL*	1.5 x IL*	2 x IL*	IL*
	4	+85+3/-0	15							
	5	+125+3/-0	15	ESR	1.25 x IL*	2.5 x IL*	1.25 x IL*	1.25 x IL*	1.25 x IL*	1.25 x IL*
Surge Voltage	Test temperature: 125°C±3/0°C Test voltage: Category voltage at 125°C Surge voltage: 1.3 x category voltage at 125°C Series protection resistance 1000±100Ω Discharge resistance: 1000Ω Number of cycles: 1000x Cycle duration: 6 min; 30 sec charge, 5 min 30 sec discharge			Visual examination	no visible damage					
				DCL	initial limit					
				ΔC/C	within ±5% of initial value					
				DF	initial limit					
				ESR	1.25 x initial limit					

*Initial Limit

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

NOSD227M004R0100	NOSC157M004R0150	NOSD107M006R0100	NOSC107M004R0150	NOSD157M006R0070
NOSD157M006R0100	NOSE227M006R0100	NOSE337M006R0100	NOSA106M006R2000	NOSB226M006R0600
NOSC107M004R0070	NOSC157M002R0065	NOSC157M002R0150	NOSC157M004R0090	NOSC227M001R0125
NOSC227M002R0080	NOSC476M006R0300	NOSC686M002R0200	NOSC686M006R0075	NOSD107M006R0080
NOSE227M006R0080	NOSE337M006R0080	NOSE477M004R0075	NOSV687M004S0075	NOSW336M006R0250
NOSE477M004R0100	NOSD337M004R0100	NOSC107M006R0150	NOSD227M006R0060	NOSD477M002R0035
NOSC476M004R0300	NOSD157M006R0050	NOSD477M004R0100	NOSW476M004R0150	NOSW686M002R0150
NOSX107M004R0100	NOSX227M001R0100	NOSX686M006R0100	NOSY157M006R0100	NOSY227M002R0100
NOSY227M004R0100	NOSY337M001R0100	NOSY337M002R0100	NOSY477M001R0100	NOSY686M006R0100
NOSD477M002R0055	NOSY337M004R0150	NOSE477M002R0100	NOSE337M004R0100	NOSC336M006R0500
NOSA106K006R2000	NOSA106M006R0800	NOSA106M006R1000	NOSA106M006S0800	NOSA156M004R1500
NOSA226M002R0900	NOSB107M001R0350	NOSB156M006R0600	NOSB226M004R0600	NOSB336M004R0600
NOSB336M006R0600	NOSB476M002R0500	NOSB476M004R0500	NOSC107M002R0150	NOSC107M002S0150
NOSC686M002S0200	NOSC686M004R0200	NOSC686M006R0200	NOSD227M004R0060	NOSD227M006R0100
NOSD337M002R0100	NOSD477M002R0100	NOSE687M002R0060	NOSV108M002R0050	NOSV108M002S0050
NOSV477M006R0075	NOSV477M006S0075	NOSV687M004R0075	NOSC227M002R0125	NOSC686M006S0200
NOSD227M004R0040	NOSD227M006R0045	NOSD337M002R0035	NOSD337M004R0035	NOSW107M001R0150
NOSX157M002R0100	NOSY107M006R0100	NOSY157M004R0100	NOSE337M006S0100	NOSB476M006R0500
NOSA106M008R2200V	NOSB226M008R1800V	NOSB106M008R1000V	NOSB156M008R1000V	
NOSA106M008R2200	NOSB106M008R1000	NOSB156M008R1000	NOSB226M008R1800	NOSC157M004R0400
NOSB476M006R0800				