


Frame	PBT, UL94V-0, Plastic
Impeller	PBT, UL94V-0, Plastic
Connection	2x lead wires 24awg Red+ Black -
Motor	Brushless DC, Auto Restart, Polarity Protected
Bearing System	Dual Ball
Insulation Resistance	10M ohm between leadwire and frame (500VDC)
Dielectric Strength	1 second at 500VAC, max leakage - 500 MicroAmp

Available Options	
Tachometer	
PWM	
IP55	
Other voltages and speeds avail	
Weight (Grams)	90 M1

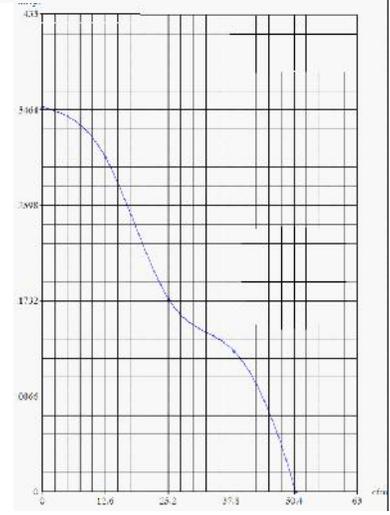

Operating Temperature		Life Expectancy		Storage Temp.
Ball Bearing	Sleeve	Ball Bearing	Sleeve	
-10C ~ +70C		70000 hours (L10 at 40C)		-40C ~ +80C

Model Number	Volts	Volt. Range	Watts	Amps	RPM	CFM	dB	MSP
OD7025-24HHB	24	21.6 ~ 26.4	6.24	.26	5000	51	46	.35

