

Multilayer Ceramic Capacitors – X7R

Features

- Miniature size
- Wide capacitance, TC, voltage and tolerance range
- Industry standard sizes
- Available for wave, reflow or vapor phase solder


How to Order

0805	B	104	K	500	N	T
↑	↑	↑	↑	↑	↑	↑
A	B	C	D	E	F	G

A		B		C	
Size Code Inches		Dielectric		Normal Capacitance	
0402	0.04×0.02	B	X7R	102	10×10 ²
0603	0.06×0.03	X	X5R	103	10×10 ³
0805	0.08×0.05				
1206	0.12×0.06				
1210	0.12×0.10				
1812	0.18×0.12				
2225	0.22×0.25	Express by three figures. Unit used is pF (pico-farad) First two figures are significant digit, third figure expresses number of zeros which follow the two significant digit If there is a decimal place it is represented by a “R”. In this scenario all figures are significant digit			
3035	0.30×0.35				

D		E		F		G	
Tolerance		Rated Voltage		Termination		Packaging Style	
K	±10%	160	16×10^0	S	Silver	T	Tape & Reel
M	±20%	250	25×10^0	N	Nickel Barrier Tin plating	B	Bulk Package
		500	50×10^0				
		630	63×10^0				
		101	10×10^1				
		201	20×10^1				
		501	50×10^1				
		102	10×10^2				
		202	20×10^2				

Termination Diagrams

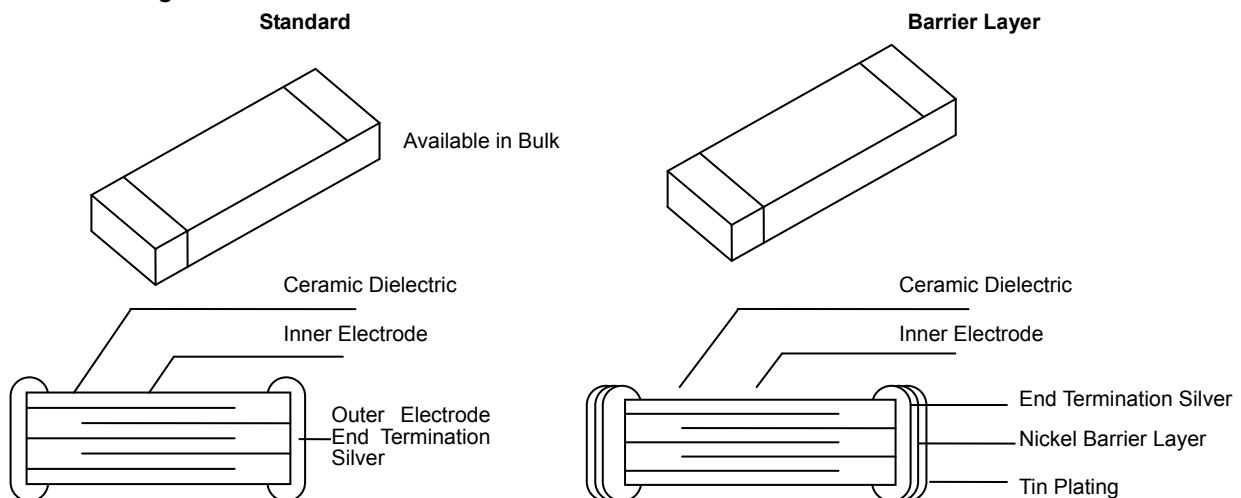

NOTE: Other Termination Available Upon Request (Contact Factory)

Multilayer Ceramic Capacitors – X7R

X7R - Dielectric Characteristic Introduction & Test Method (Table 1)


Item	Specification		Test Method
Capacitance	(100PF~2.2uF)		1KHz±10%, 1.0±0.2Vrms
Capacitance Tolerance	K=±10% M=±20% S=±50%/ -20%		
Rated Voltage	16、25、50、63、100、200、 500、1000、2000VDC		
Dissipation Factor (DF)	1000、2000VDC DF:<0.25%(100V) <3.0%(50V、25V) <3.5%(16V)		
Insulation Resistance (IR)	C≤25nF:R>4000MΩ C>25nF:RxC>100S		Test Voltage: rating voltage Charging time:1min Temperture:18~25°C Humidity:<80°C
Dielectric Withstanding Voltage	There shall be no evidence of damage or flash over during the test.		Apply 2.5 x rating voltages to both Terminations for 5 seconds. Charge and discharge current are less than 50mA.
Termination Adhesion	There shall be no evidence of damage during the test.		Test Condition:5N:10±1s
Bending Strength	There shall be no evidence of damage during the test; capacitance tolerance shall be not more than 10%.		After soldering capacitor on the PCB, 1mm of bending shall be applied for 1 second as shown by Drawing.
Solderability	Termination area shall be at least 80% covered with a new solder coating. There shall be no crack and ceramic exposure of terminated surface by melting.		The capacitors are completely immersed during 2 in the molten rosin, Then immersed 10mm during 2±1s in the molten solder with a temperature of 235±5°C.Pick up the capacitors-and cleaned with solvent, and put in on the> 10 times microscope.
Resistance to Soldering Heat	Type	X7R(B)	
	Temp	265±5°C	
	Time	5±1s	
	Cover%	≥85%	
	△C/C	-5~+10%	

Multilayer Ceramic Capacitors – X7R

X7R - Dielectric Characteristic Introduction & Test Method (Table 2)

Item	Specification		Test Method	
Temperature Cycling	Type	X7R	Condition	X7R
	△C/C	≤1%	Temp.Oa	-55±3℃
			Temp.Ob	+125±3℃
	There shall be no evidence of damage during the test.		Cycle times	5 times 30min/time
			Resume time	24h
			Changing times	2~3min
Humidity & Moisture Resistance	Type	X7R	Permanent moisture: T=40±2℃ t=21d Relative humidity: 93+2%-3% Resume time: 1~2h	
	△C/C	≤10%		
	DF	0.05		
	IR	RxC>25s		
	There shall be no evidence of damage during the test.			
T.C. Characteristics	Dielectric	△C/C	Dielectric	T.C
	X7R	±15℃	X7R	+20℃→-55℃→+20℃→+125℃
Vibration	There shall be no evidence of damage during the test.		Vibration frequency: f=10~500HZ Vibration range:0.75mm/s2 in 3 direction:2h/direction	
Bump	Type	X7R	4000 addeleration :390m/s2 Pulse duration:6ms	
	△C/C	≤2%		
	There shall be no evidence of damage during the test.			
Life test	Type	X7R	Condition	X7R
	△C/C	≤2%	Temp	+125℃
	DF	0.003	Time	T=100th
	IR	RxC>25s	Voltage	V=1.5Vr
	There shall be no evidence of damage during the test.		Resume time	24±1h
6 grade failure test	Type	X7R	Condition	X7R
	△C/C	≤10%	Creditability	60%
	DF	0.05	Temp	+125℃
	IR	RxC>25s	Voltage	Rating Voltage
	There shall be no evidence of damage during the test.		Time	1000h

Typical Characteristic

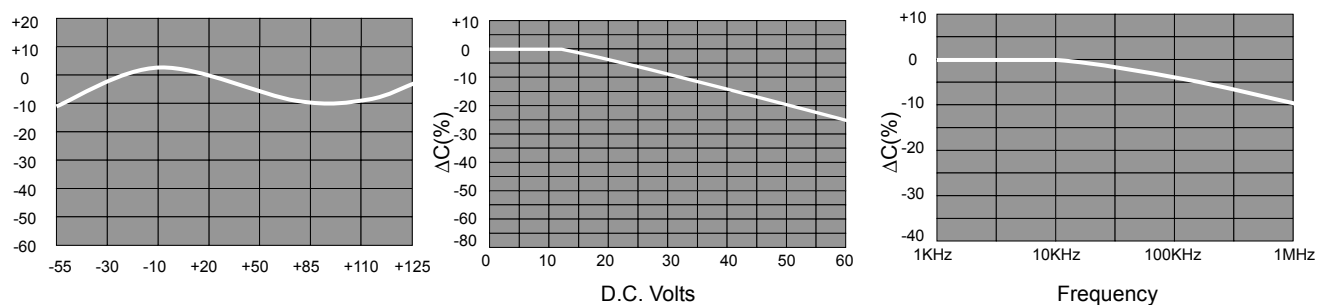

Multilayer Ceramic Capacitors – X7R

Size Code Capacitance And Voltage(Table 1)

	Dimension (mm)				Voltage	Capacitance (pF)
Size Code	L	W	T	Me		X7R
0402	1.0±0.05	0.5±0.05	0.5±0.05	0.1±0.05	10V	101~105
					16V	101~223
					25V	101~103
					50V	101~392
0603	1.6±0.1	0.8±0.10	0.8±0.1	0.3±0.1	25V	101~333
					50V	101~223
					100V	101~472
					200V	
0805	2.00±0.20	1.25±0.20	0.7± ^{0.3} _{0.2}	0.5±0.25	25V	331~104
			1.25±0.15		50V	331~473
			1.0± ^{0.3} _{0.2}		100V	331~223
					200V	222~153
1206	3.20±0.30	1.60±0.20	1.0± ^{0.3} _{0.2}	0.5±0.25	500V	222~123
			1.25± ⁰ _{0.2}		25V	102~224
					50V	102~104
					100V	102~683
					200V	221~223
					500V	221~223
1210	3.20±0.30	2.50±0.30	1.0± ^{0.3} _{0.2}	0.70±0.25	1000V	221~472
			1.25±0.3		2000V	680~102
					25V	102~334
					50V	102~224
					100V	102~104
					200V	102~683
1812	4.50±0.40	3.20±0.30	2.5	1.00±0.25	500V	222~473
					1000V	102~153
					2000V	181~152
					25V	103~474
					50V	103~334
					100V	103~224
					200V	682~104
					500V	472~124
					1000V	222~273
					2000V	331~332

Size Code Capacitance and Voltage (Table 2)

Size Code	Dimension (mm)				Voltage	Capacitance (pF)
	L	W	T	Me		X7R
2225	5.70±0.50	6.40±0.50	2.5	1.00±0.25	25V	103~105
					50V	103~105
					100V	103~474
					200V	153~424
					500V	183~394
					1000V	822~104
					2000V	122~103
3035	7.60±10.50	9.00±0.50	3.0	1.00±0.25	25V	103~225
					50V	103~225
					100V	103~105
					200V	103~125
					500V	682~105
					1000V	
					2000V	


Multilayer Ceramic Capacitors – X7R

Packaging

Structure and Dimension

Tape & Reel

A	B*	C	D*	E	F	G
178±2.0	3.0	13±0.5	φ32	50MIN	10.0±	14.9
				φ±1	1.5	12±2.0

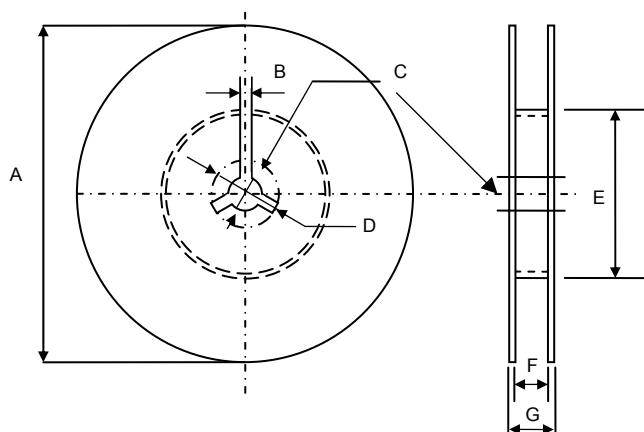


Paper Tape

Size	A	B
0402	0.6±0.2	1.1±0.2
0603	1.1±0.2	1.4±0.2
0805	1.45±0.2	2.3±0.2
1206	1.8±0.2	3.4±0.2

Plastic Tape (Te)


Size	A	B
0402	0.5±0.2	1.2±0.2
0603	0.8±0.2	2.0±0.2
0805	1.65±0.2	2.4±0.2
1206	2.0±0.2	3.6±0.2

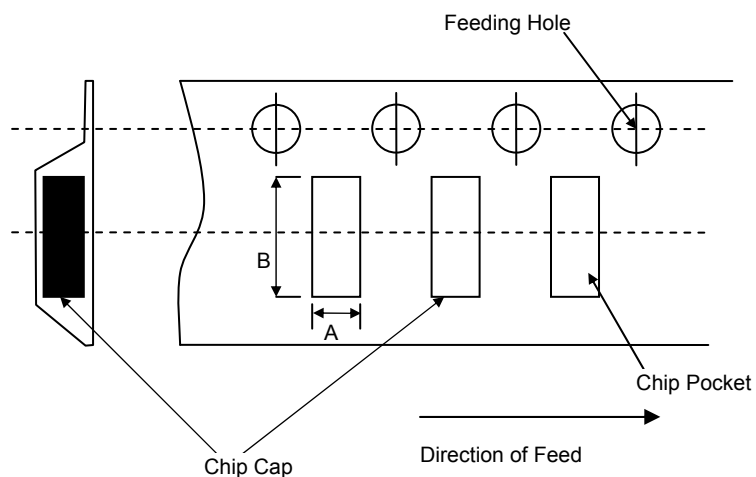

Multilayer Ceramic Capacitors – X7R

Cartridge

Symbol	A	B	D	C	T	E
Dimension	6.8±0.1	8.8±0.1	12±0.1	15±0.1-0	2±0-0.1	4.7±0.1
Symbol	F	W	G	H	L	I
Dimension	31.5±0.2-0	36±0-0.2	19±0.35	7±0.35	110±0.7	5±0.35

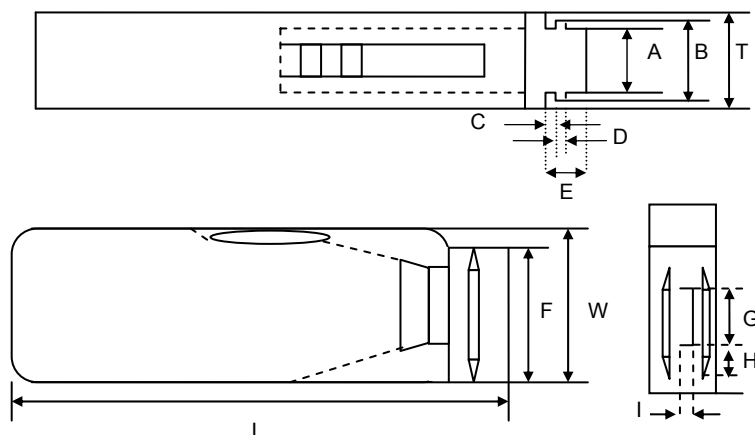

Packaging Quantity

Size	Quantity		
	Paper Tape Taping	Plastic Embossed Tapping	Bulk Packaging
0402	10000		10000
0603	4000		4000
0805	4000	2000 / 3000	4000
1206	4000	2000 / 3000	4000
1210		2000 / 3000	2000
1808		2000 / 3000	2000
1812		1000	2000
2225			
3035			