


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .020$	W $\pm .010$	C $\pm .020$	M $\pm .020$	H $\pm .010$
P18-6LF	#6	.68 (17,3)	.27 (6,9)	.22 (5,6)	.48 (12,2)	.15 (3,8)
P18-6LFW	#6	.70 (17,8)	.29 (7,4)	.22 (5,6)	.48 (12,2)	.15 (3,8)
P18-8LF	#8	.74 (18,8)	.29 (7,4)	.23 (5,8)	.53 (13,5)	.16 (4,1)
P18-10LF	#10	.74 (18,8)	.33 (8,4)	.23 (5,8)	.53 (13,5)	.19 (4,8)
P18-10LFN **	#10	.74 (18,8)	.28 (7,1)	.23 (5,8)	.53 (13,5)	.19 (4,8)

NOTES :

- UL LISTED AND CSA CERTIFIED FOR:
A. #22-16 AWG SOLID OR STRANDED, COPPER WIRE
- 302°F (150°C) MAX. USE TEMP.
- PACKAGE QTY.: STD C=100
BULK M=1000
- MATERIAL:
A. STAMPING - .032 (.81) THK COPPER, TIN PLATED
- WIRE STRIP LENGTH $9/32^{+1/32}_{-0}$ (7,1^{+,8}₋₀)
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:
A. UL AND CSA APPROVED: CT-100, CT-200, CT-1570 *
B. PANDUIT APPROVED: CT-160, CT-260

* APPROVED FOR EXPANDED WIRE RANGE #22-16 AWG

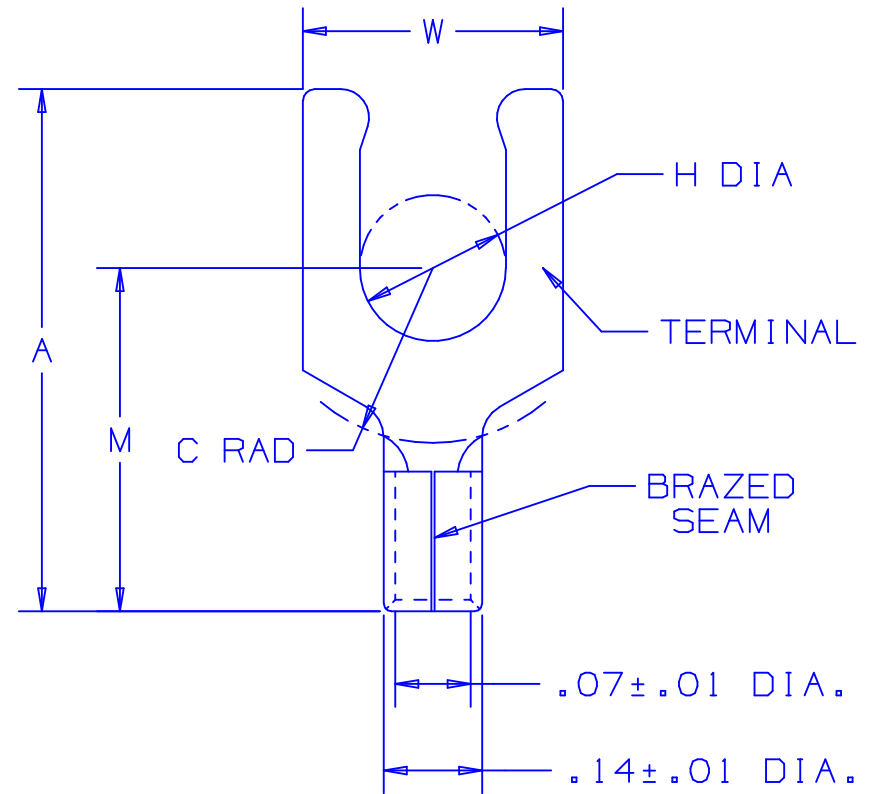

** P18-10LFN IS NOT UL LISTED OR CSA CERTIFIED

LISTED
587H
E52164CERTIFIED
LR31212

A41059_07

07	2/01	EJS		FILE SPEC WAS N41059AA_PCD_06, REMOVED CT-570 FROM NOTE 7				 PANDUIT CORP. TINLEY PARK, ILLINOIS			
06	1/96	ED	RLS	REV'S TO NOTES & DIM'S, ORIG FILE SPEC WAS NPC-A41059-05	03801	LA	DBH				
05	3/91	DL		TANG WIDTH INCREAED PART NO P18-6LF							
--	--	--	--	REDRAWN ON CAD WITH REVISIONS		--	--				
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	DRAWN BY DRL	CHK'D LA	SCALE NONE	DRAWING NO. A41059

#22-18 BARREL NON-INSULATED
LOCKING FORK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[P18-8LF-M](#) [P18-6LF-C](#) [P18-8LF-C](#) [P18-10LF-M](#) [P18-6LFW-C](#) [P18-10LF-C](#) [P18-10LFN-C](#) [P18-6LF-M](#)