


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C MIN	M ±.03	H ±.01
P18-6F	#6	.63 (16.00)	.30 (7.62)	.21 (5.33)	.49 (12.45)	.15 (3.81)
P18-6FN *	#6	.63 (16.00)	.24 (6.10)	.19 (4.83)	.49 (12.45)	.15 (3.81)
P18-8F	#8	.69 (17.53)	.32 (8.13)	.25 (6.35)	.53 (13.46)	.17 (4.32)
P18-10F	#10	.71 (18.03)	.35 (8.89)	.25 (6.35)	.55 (13.97)	.20 (5.08)
P18-10FN *	#10	.71 (18.03)	.31 (7.87)	.25 (6.35)	.55 (13.97)	.20 (5.08)
P18-14F	1/4"	.88 (22.35)	.44 (11.18)	.33 (8.38)	.63 (16.00)	.27 (6.86)

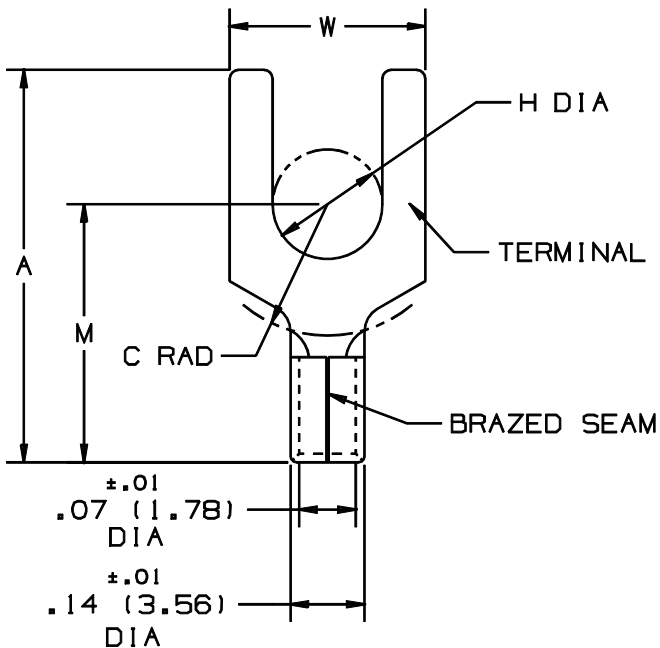

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
A. #22-16 AWG SOLID OR STRANDED
COPPER WIRE
2. MATERIAL:
A. STAMPING - .03" (.76) THK COPPER,
TIN PLATED
3. 302°F (150°C) MAX USE TEMP
4. PACKAGE QTY: STD. PKG.C=100
BULK PKG.M=1000
5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
6. INSTALLATION TOOLS:
A. UL LISTED AND CSA CERTIFIED: CT-100,
CT-200, CT-570, CT-1570
B. PANDUIT APPROVED: CT-160, CT-260
7. WIRE STRIP LENGTH: 9/32 ^{+1/32} 0 (7.1 ⁺⁸ .0)
8. (*) THESE PARTS NOT UL LISTED OR CSA CERTIFIED



LISTED
587H
E52164



CERTIFIED
LR31212

A41461_05

								 PANDUIT CORP. TINLEY PARK, ILLINOIS			
05		JKD		ADDED CT-1570 TOOL							
04	1/97	TM	RLS	ADDED NARROW TONGUE FORKS AND 1/4" STUD FILESPEC WAS N41461AA_PCD_03	05472	LCA	KRS				
03	7/95	MC	RLS	UPDATED NOTES AND DIMENSIONS	03434	TJP	KRS	#22-18 BARREL NON-INSULATED FORK			
REV	DATE	BY	CHK	DESCRIPTION	ECN #	APP	PM	DRAWN BY DRL	CHK'D	SCALE NONE	DRAWING NO. A41461