

SUMMARY

Wires

Low	8
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	PKB.M0.8GL.LV



Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PA*: Straight plug with cable collet and nut for fitting a bend relief
Keying	2 keys (alpha=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	C52: 4 - 5.2 mm
Variant	V : Green collet nut for bend relief

Performance

Configuration	1P.M08 : 8 Low Voltage
Insulator	
Rated Current	5 Amps

Specifications

Contact Type: Solder
Max. Matings: 2000
Contact Dia.: 0.7 mm (0.0275in)
Bucket Dia.: 0.6 mm (0.024in)
Max. Solid Conductor: 0.14 mm ² (AWG 26)
Max. Stranded Conductor: 0.14 mm ² (AWG 26)
R (max): 6.5 mOhm
Test voltage (kV rms) Contact-contact: 1.05


Air clearance min. (mm) or Creepage distance min. (mm): 0.6

Others

- F ret (min): 50 N
- F ret (max): 150 N
- R leak (He) (max): 0.0000001 mbar*l/s (if vacuum-tested)
- IP Rating: 50

DRAWINGS

Draws

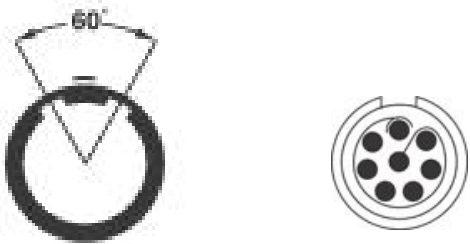

Dimensions

	A	L
mm.	14	45
in.	0,55	1,77

RECOMMENDED BY LEMO

Tools

None

Cables

CMN.08.T26.042QGZE	TPR (medical)	Grey	
008 280	PVC	Black	
108 240	PTFE	White	
108 260	PTFE	White	

