


PCIE-1602 PCIE-1604 PCIE-1610 PCIE-1612

2-port RS-232/422/485 PCI Express Communication Card

2-port RS-232 PCI Express Communication Card


4-port RS-232 PCI Express Communication Card

4-port RS-232/422/485 PCI Express Communication Card

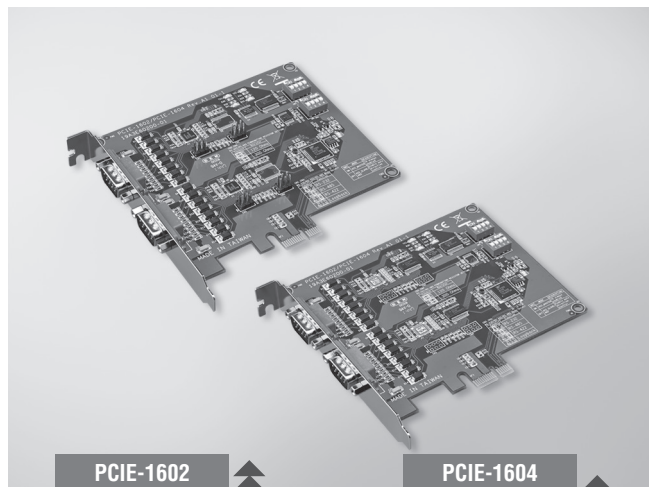

PCIE-1602

PCIE-1604

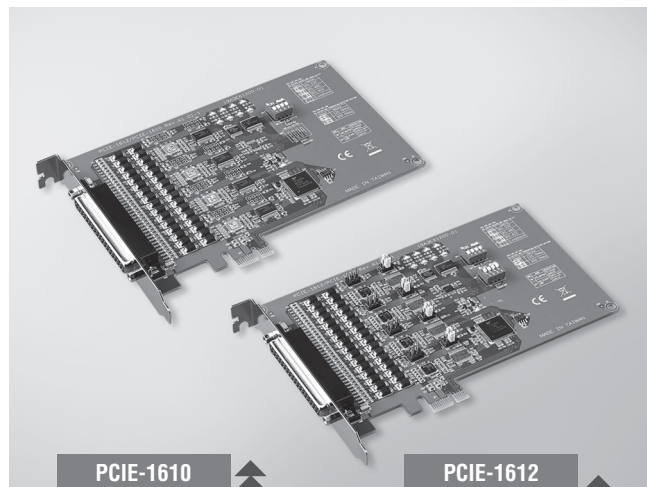

PCIE-1610

PCIE-1612



Features

- PCI Express bus 2.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 2 x RS-232 or RS-232/422/485 ports
- Operating systems supported: Windows 7/8/10, and Linux.
- XR17V352 UART with 256-byte FIFOs

Specifications

General

- Bus Type** PCI Express bus 2.0 compliant
- Bus Interface** PCI Express x1
- Certification** CE, FCC class A
- Connectors** 2x male DB9
- Dimensions (L x W)** 119.63 x 111 mm (4.71" x 4.4")
- Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- Comm. Controller** XR17V352
- Data Bits** 5, 6, 7, 8
- FIFO** 256 bytes
- Parity** None, Odd, Even, Mark and Space
- Speed** 50 bps ~ 921.6 kbps
- Stop Bits** 1, 1.5, 2

Software

- Bundled Software** ICOM Tools
- OS Support** Windows 7/8/10, and Linux. (You can reference SW release note to know the version of supported OS.)

Environment

- Operating Humidity** 5 ~ 95 % RH, non-condensing
- Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1602B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1602C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{DC}
PCIE-1604B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1604C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{DC}

Ordering Information

- PCIE-1602B-AE** 2-port RS-232/422/485 PCI Express Comm. Card w/Surge
- PCIE-1602C-AE** 2-port RS-232/422/485 PCI Express Comm. Card w/Surge & Isolation
- PCIE-1604B-AE** 2-port RS-232 PCI Express Comm. Card w/Surge
- PCIE-1604C-AE** 2-port RS-232 PCI Express Comm. Card w/Surge & Isolation

Features

- PCI Express bus 2.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 4 x RS-232 or RS-232/422/485 ports
- Operating systems supported: Windows 7/8/10, and Linux.
- XR17V354 UART with 256-byte FIFOs

Specifications

General

- Bus Type** PCI Express bus 2.0 compliant
- Bus Interface** PCI Express x1
- Certification** CE, FCC class A
- Connectors** 1x Female DB37
- Dimensions (L x W)** 168 x 111 mm (6.6" x 4.4")
- Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- Comm. Controller** XR17V354
- Data Bits** 5, 6, 7, 8
- FIFO** 256 bytes
- Parity** None, Odd, Even, Mark and Space
- Speed** 50 bps ~ 921.6 kbps
- Stop Bits** 1, 1.5, 2

Software

- Bundled Software** ICOM Tools
- OS Support** Windows 7/8/10, and Linux. (You can reference SW release note to know the version of supported OS.)

Environment

- Operating Humidity** 5 ~ 95 % RH, non-condensing
- Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1610B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1612B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1612C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{DC}

Ordering Information

- PCIE-1610B-AE** 4-port RS-232 PCI Express Comm. Card w/Surge
- PCIE-1612B-AE** 4-port RS-232/422/485 PCI Express Comm. Card w/Surge
- PCIE-1612C-AE** 4-port RS-232/422/485 PCI Express Comm. Card w/Surge & Isolation

Note: this series includes cable OPT4A.

Accessories

- OPT4A-AE** DB37 x1 to DB9 x4 Cable, 30cm
- 1700018791** DB37 x1 to DB25 x4 Cable, 30cm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advantech:](#)

[PCIE-1604C-AE](#) [PCIE-1602C-AE](#) [PCIE-1610B-AE](#) [PCIE-1602B-AE](#) [PCIE-1604B-AE](#) [PCIE-1612B-AE](#) [PCIE-1612C-AE](#)