


LEDTRONICS
MORE CHOICE, MORE LIGHT

T1 BI-LEVEL (3mm) LEDs

LED 1 COLOR	LED 2 COLOR	LEDTRONICS LED PART NO	LED 1 mA	LED 1 Vf	LED 1 Iv (mcd)	LED 2 mA	LED 2 Vf	LED 2 Iv (mcd)
RED	RED	21PCT120TR4	10/30	2.0/2.8	1.7/5.6	10/30	2.0/2.8	1.7/5.6
RED	YELLOW	21PCT120T4-R/Y	10/30	2.0/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.5
RED	GREEN	21PCT120T4-R/G	10/30	2.0/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.6
YELLOW	RED	21PCT120T4-Y/R	10/30	2.1/2.8	1.7/5.5	10/30	2.0/2.8	1.7/5.6
YELLOW	YELLOW	21PCT120TY4	10/30	2.1/2.8	1.7/5.5	10/30	2.1/2.8	1.7/5.5
YELLOW	GREEN	21PCT120T4-Y/G	10/30	2.1/2.8	1.7/5.5	10/30	2.1/2.8	1.7/5.6
GREEN	RED	21PCT120T4-G/R	10/30	2.1/2.8	1.7/5.6	10/30	2.0/2.8	1.7/5.6
GREEN	YELLOW	21PCT120T4-G/Y	10/30	2.1/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.5
GREEN	GREEN	21PCT120TG4	10/30	2.1/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.6

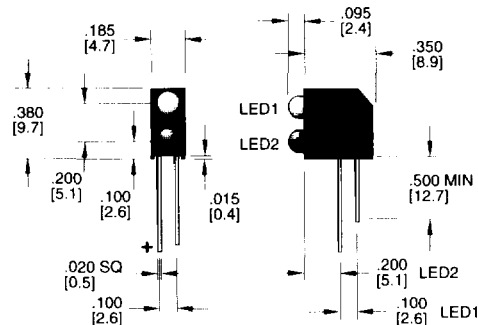

FEATURES:

1. LONG LIFE (*AVERAGE 100,000 HOURS*)
2. LOW POWER CONSUMPTION
3. LOW CURRENT DRAW
4. LOW RADIANT HEAT
5. HIGH SHOCK AND VIBRATION RESISTANT
6. COLOR COHERENT LIGHT SOURCE
7. NO CURRENT SURGE
8. FAST TURN ON RESPONSE TIME

APPLICATION NOTES:

1. OTHER COLORS, VOLTAGES, AND STYLES ARE AVAILABLE.
2. ALL VOLTAGE "Vf" READINGS ARE TYP/MAX.
3. ALL CURRENT "mA" READINGS ARE MIN/TYP.
4. "+" DENOTES ANODE.

T1 BI-LEVEL (3mm) LEDs

LED 1 COLOR	LED 2 COLOR	LEDTRONICS LED PART NO	LED 1 mA	LED 1 Vf	LED 1 Iv (mcd)	LED 2 mA	LED 2 Vf	LED 2 Iv (mcd)
RED	RED	21PCT170TR4	10/30	2.0/2.8	1.7/5.6	10/30	2.0/2.8	1.7/5.6
RED	YELLOW	21PCT170T4-R/Y	10/30	2.0/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.5
RED	GREEN	21PCT170T4-R/G	10/30	2.0/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.6
YELLOW	RED	21PCT170T4-Y/R	10/30	2.1/2.8	1.7/5.5	10/30	2.0/2.8	1.7/5.6
YELLOW	YELLOW	21PCT170TY4	10/30	2.1/2.8	1.7/5.5	10/30	2.1/2.8	1.7/5.5
YELLOW	GREEN	21PCT170T4-Y/G	10/30	2.1/2.8	1.7/5.5	10/30	2.1/2.8	1.7/5.6
GREEN	RED	21PCT170T4-G/R	10/30	2.1/2.8	1.7/5.6	10/30	2.0/2.8	1.7/5.6
GREEN	YELLOW	21PCT170T4-G/Y	10/30	2.1/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.5
GREEN	GREEN	21PCT170TG4	10/30	2.1/2.8	1.7/5.6	10/30	2.1/2.8	1.7/5.6

