


## 3.2-3.8kW Single-Phase Switched PDU, 200-240V (20-C13 & 4-C19), C20/L6-20P Cable, 0U Vertical, 70 in., TAA

MODEL NUMBER: **PDUMV20HVNET**

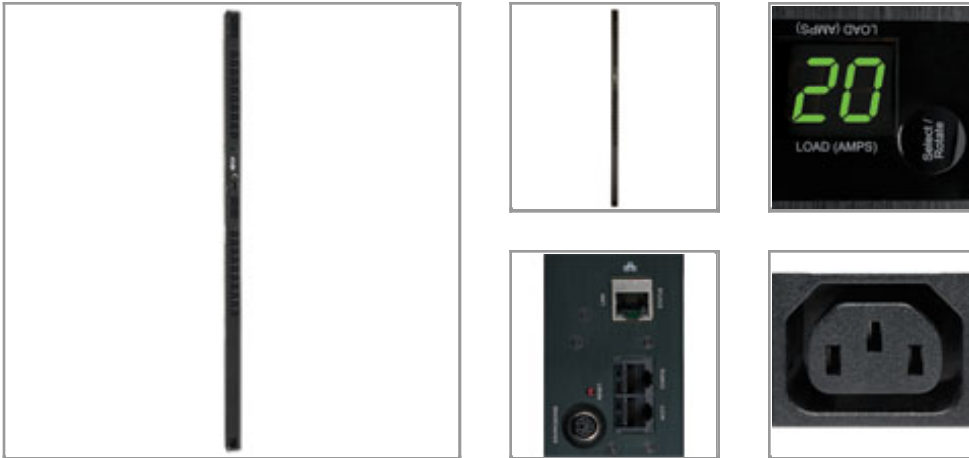

### Description

Tripp Lite single phase Switched PDU / Power Distribution Unit offers advanced network control and monitoring with the ability to turn on, turn off, recycle or lock-out power to each individual receptacle, monitor site electrical conditions and remotely monitor output power consumption. PowerAlert interface supports remote control and custom notification of user-specified conditions via email, secure web, SNMP, Telnet or SSH interface. Individually switched outlets can be controlled in real-time to remotely reboot unresponsive network hardware, or be custom programmed for user-defined power-up and power-down sequences to ensure proper startup of interdependent IT systems and prevent inrush-related overloads as network equipment is first energized. Unused PDU outlets can be electronically locked off to prevent the connection of unauthorized hardware. PDU output current consumption in amps is continuously displayed locally via visual meter and remotely via web/network interface to warn of potential overloads before critical IT mains or branch breakers trip.

### Features

- 16/20A 200/208/230/240V Switched PDU with built-in web/network interface in 0U 70 inch / 178cm vertical rackmount form factor (Agency derated to 16 amps)
- C20 inlet accepts a variety of site specific cordsets; 10 ft. / 3m L6-20P power cable included
- 24 switched outlets (20 C13; 4 C19)
- Supports power-on, power-off or reboot of each outlet on a real-time or programmable basis
- Enables reboot of locked equipment, custom power-on/power-off sequences, load-shedding of optional loads and disabling unused outlets
- Network interface provides PDU control and data regarding input voltage, frequency and loading information
- Digital display reports load level information in amps
- Supports user-specified alarm notification thresholds
- In-rack environmental reporting with optional ENVIROSENSE temperature / humidity sensor and rack access notification with up to 4 optional SRSWITCH door sensors
- DHCP/Manual configuration support

### Highlights

- Switched 16/20A 200-240V PDU, 0U 70 in / 178cm Vertical Rackmount format
- Reports voltage, frequency & loading information via ethernet interface
- Visual current meter; Toolless button mount installation
- C20 inlet; 10ft / 3m L6-20P input cable
- 24 switched outlets (20 C13; 4 C19) with cord retention brackets
- Temperature, humidity and contact-closure monitoring options
- TAA Compliant

### Applications

- Ideal for network configurations requiring a switched, metered and monitored PDU supporting individual outlet rebooting, load shedding and remote Web/network current monitoring of critical networking components

### Package Includes

- Rackmount PDU
- L6-20P to C19 detachable input cord
- Rackmount brackets
- PDUMVROTATEBRKT mounting accessory



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

- 10/100 Mbps auto-sensing
- Real-time clock backup maintains the time of day and date even if the PDU is not powered on
- Tiered access privileges allow an administrator and a guest to login via web browser
- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements
- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

## Specifications

OVERVIEW	
PDU Type	Switched
OUTPUT	
Output Capacity Details	3.3kW (208V input), 3.5kW (220V input), 3.7kW (230V input), 3.8kW (240V input), 3.2kW (200V input); 20A maximum (agency de-rated to 16A continuous)
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(20) C13; (4) C19
Output Nominal Voltage	200-240V nominal, single phase
Outlet Type	IEC-C13, IEC-C19
Customized Load Management Receptacles	Each outlet is individually controllable via remote interface
Individual Outlet Switching	Yes
INPUT	
PDU Input Voltage	200; 208; 220; 230; 240
Maximum Input Amps	20
Maximum Input Amps Details	Agency de-rated to 16A continuous
Input Connection Type	C20 inlet accepts included L6-20P input cable
PDU Plug Type	NEMA L6-20P; IEC-320 C20
Input Cord Length (ft.)	10
Input Cord Length (m)	3
Input Phase	Single-Phase
USER INTERFACE, ALERTS & CONTROLS	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

Front Panel LEDs	24 power availability LEDs confirm power off/on status for each built-in outlet
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	4 x 6 x 72.5
Shipping Dimensions (hwd / cm)	10.2 x 15.2 x 184.2
Shipping Weight (lbs.)	13.5
Shipping Weight (kg)	6.1
Unit Dimensions (hwd / in.)	70 x 2.19 x 2.65
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 6.7
Unit Weight (lbs.)	8.5
Unit Weight (kg)	3.8
Form Factors Supported	0U vertical rackmount; includes rackmount brackets. Supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Relative Humidity	0-95% non-condensing
<b>COMMUNICATIONS</b>	
SNMP Compatibility	Pre-installed <a href="#">SNMPWEBCARD</a> provides remote monitoring via web, Telnet, and SNMP management systems. Remote management enables outlets to be turned on and off individually
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL 60950-1 (USA, Canada), CE (Int'l), Class A (Emissions), NOM (Mexico), RoHS compliant, TAA Compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2015 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.