


# 1.9 kW Single-Phase Metered PDU, 120V Outlets (28 5-15/20R), L5-20P/5-20P Adapter, 15ft Cord, 0U Vertical

MODEL NUMBER: **PDUMV20**

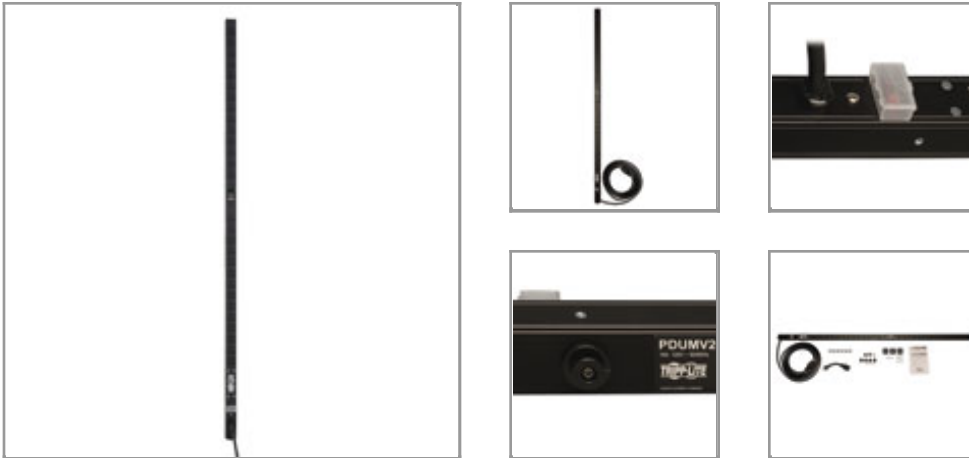

## Description

Tripp Lite single phase Metered PDU / Power Distribution Units offer real-time local reporting of load level in amps via built-in digital display. Enables visual monitoring of PDU load levels to prevent overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

## Features

- 20A single phase 120V Metered Power Distribution Unit / PDU (Agency de-rated to 16A continuous)
- Two-digit lighted meter reports combined total output current in amps
- Attached NEMA L5-20P input plug with 15ft / 4.6m line cord and 5-20P adapter
- 0U 60in / 152cm vertical rackmount format installs using no rack spaces
- 28 NEMA 5-15/20R outlets
- Includes 20A circuit breaker and lighted power switch inside a transparent protective cover
- Toolless installation supported in button-mount compatible equipment racks
- Bolt-down installation brackets support installation in other racks and additional surfaces

## Highlights

- Metered single phase 120V 20A 0U 60in / 152cm vertical rackmount PDU
- Two-digit current meter reports output current in amps
- Attached 15ft / 4.6m cord with NEMA L5-20P plug and 5-20P adapter
- 28 NEMA 5-15/20R outlets
- Toolless button mount and bolt-down bracket installation hardware included

## Applications

- Ideal means of powering networking equipment in datacenters, computer rooms and network closets

## Package Includes

- PDUMV20 Metered Vertical PDU
- (1) L5-20P to 5-20P plug adapter
- Mounting hardware and spare mounting buttons
- Instruction manual with warranty information

## Specifications

OVERVIEW	
With Ethernet Switch	No
Surge Protection	No
Style	Vertical Rackmount



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

PDU Type	Metered
<b>OUTPUT</b>	
Output Capacity Details	1.9kW (120V input), 2.0kW (127V input), 1.6kW (100V input); 20A maximum (Agency de-rated to 16A continuous)
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(28) 5-15/20R
Output Nominal Voltage	100-127V nominal, single phase
Overload Protection	20A
Outlet Type	NEMA 5-15/20R
<b>INPUT</b>	
PDU Input Voltage	100; 120; 127
Maximum Input Amps	20
Maximum Input Amps Details	Agency de-rated to 16A continuous
PDU Plug Type	NEMA 5-20P; NEMA L5-20P
Input Cord Length (ft.)	15
Input Cord Length (m)	4.6
Input Phase	Single-Phase
<b>LEDS ALARMS &amp; SWITCHES</b>	
Switches	Lighted on/off switch with integrated transparent safety cover
Front Panel LEDs	Digital ammeter display
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	63.25 x 3 x 2.75
Shipping Dimensions (hwd / cm)	160.66 x 7.62 x 6.99
Shipping Weight (lbs.)	6
Shipping Weight (kg)	2.72
Unit Dimensions (hwd / in.)	60 x 1.75 x 1.25
Unit Dimensions (hwd / cm)	152.4 x 4.45 x 3.18
Unit Weight (lbs.)	5.4
Unit Weight (kg)	2.45
Material of Construction	Aluminum
Form Factors Supported	Vertical
PDU Form Factor	Vertical (0U)



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

CERTIFICATIONS	
Certifications	Tested to UL60950-1 (USA) and CAN/CSA C22.2 No. 60950-1-03 (Canada), RoHS Compliant
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2015 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tripp Lite:](#)

[PDUMV20](#)