


# SAW Duplexer

## D6PF1G960M3B6

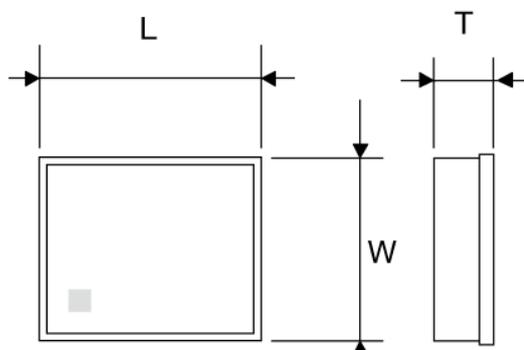

### ■ Features

- Item Summary  
W-CDMA / CDMA, 0806
- Lifecycle Stage  
Mass Production
- Standard packaging quantity (minimum)  
Taping Embossed 3000 , 15000pcs

### ■ Products characteristics table

Temperature Range	-30 to +85°C
Band(3GPP)	B2
Band(3GPP2)	BC1
Use	WCDMA / CDMA
Transmitting / Receiving	Duplexer
Insertion Loss	2.2/2.7dB
Attenuation	55/52dB
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

### ■ External Dimensions

L	2.0mm +0.1:-0.1
W	1.6mm +0.1:-0.1
T	0.57mm max

2013.08.20

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.  
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.  
 Before making final selection, please check product specification.