



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

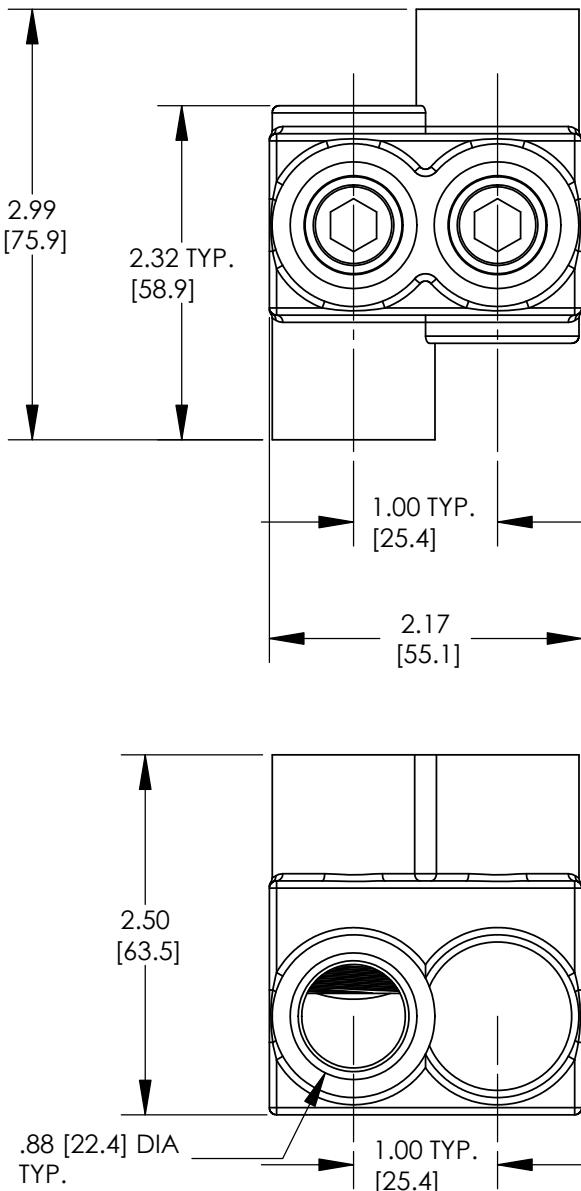

CLAMPING SCREW  
ACCESS PORT (TYP.)

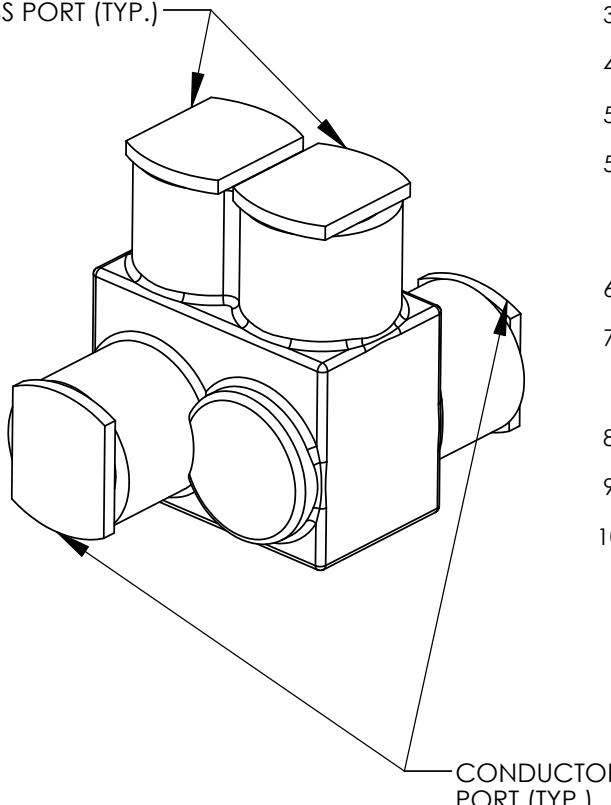

NOTES:

1. DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
2. UL LISTED AND CSA CERTIFIED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS.
3. VOLTAGE RATING: 600V MAX
4. TEMPERATURE RATING: 90 °C
5. WIRE RANGE: 350kcmil - #10AWG
6. INSULATION MATERIAL IS CLEAR PVC.
7. CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
8. HEK KEY SIZE: 11/16"
9. ALL DIMENSIONS SHOWN ARE NOMINAL.
10. PACKAGE QUANTITY: -1 = 1



LISTED



CERTIFIED

C41710\_00

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

MULTI-TAP INSULATED CONNECTOR  
(PITO350-1)  
CUSTOMER DRAWING

00	8/07	JHNU	LEM	DRAWING RELEASED										
REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	APP	DRAWN BY JHNU	CHK'D	SCALE NONE	DRAWING NO / CAD FILE C41710			