

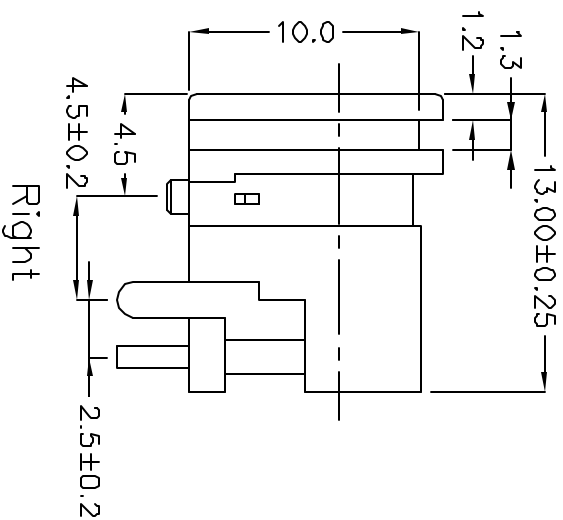
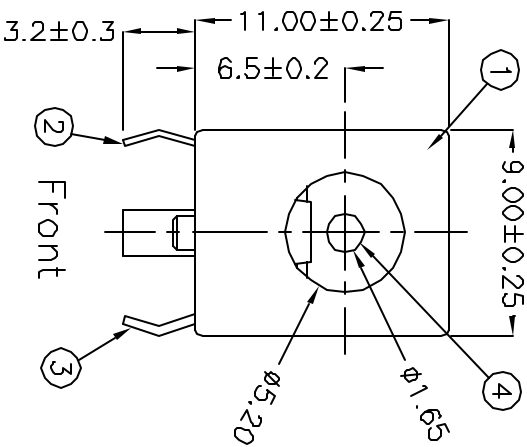




- Specifications:
1. Insulation Resistance: 100MΩhms min. (initial)
 2. Contact Resistance (initial): 30mΩhms max at 100mA(max) 1KHz.
 3. Dielectric Withstand Voltage: AC 250V, 50 to 60Hz for 1 minute.
 4. Endurance: 5,000 Cycles 10 ~ 20 cycles per minute.
 5. Rated Voltage: 20.0 Volts DC
 6. Rated Current: 2.5 Amps DC
 7. Operating Temp: -25 to +85 deg. C.

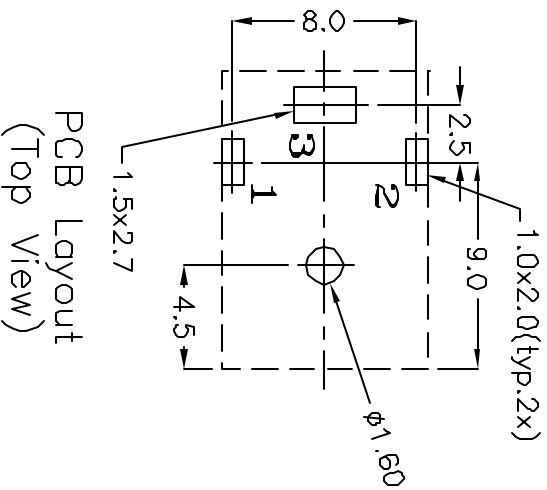

No.	Description	Material	Finish	Qty	Remark
4	Center Pin	Brass	Tin	1	Ø1.65
3	Shunt Terminal	Brass	Tin	1	40T
2	Spring Contact	Copper Alloy	Tin	1	25T
1	Plastic Housing	PBT	Black Color	1	UL94V-0

CUI INC

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-276-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE: **Ø1.65 DC Power Jack, PCB Mount**

PART NO. **PJ-021** UNITS: **Millimeters**

DRAWN BY: **Todd White** APPROVED BY: SCALE: **3x**