

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .030$	W $\pm .010$	C $\pm .020$	M $\pm .030$	H $\pm .010$
PN14-5SLF-3K	#5	$\begin{smallmatrix} .75 \\ (19.05) \end{smallmatrix}$	$\begin{smallmatrix} .25 \\ (6.35) \end{smallmatrix}$	$\begin{smallmatrix} .19 \\ (4.83) \end{smallmatrix}$	$\begin{smallmatrix} .64 \\ (16.26) \end{smallmatrix}$	$\begin{smallmatrix} .12 \\ (3.05) \end{smallmatrix}$
PN14-6SLF-3K	#6	$\begin{smallmatrix} .75 \\ (19.05) \end{smallmatrix}$	$\begin{smallmatrix} .25 \\ (6.35) \end{smallmatrix}$	$\begin{smallmatrix} .19 \\ (4.83) \end{smallmatrix}$	$\begin{smallmatrix} .64 \\ (16.26) \end{smallmatrix}$	$\begin{smallmatrix} .14 \\ (3.56) \end{smallmatrix}$
PN14-8SLF-3K	#8	$\begin{smallmatrix} .80 \\ (20.32) \end{smallmatrix}$	$\begin{smallmatrix} .29 \\ (7.36) \end{smallmatrix}$	$\begin{smallmatrix} .23 \\ (5.84) \end{smallmatrix}$	$\begin{smallmatrix} .68 \\ (17.27) \end{smallmatrix}$	$\begin{smallmatrix} .16 \\ (4.06) \end{smallmatrix}$
PN14-10SLF-3K	#10	$\begin{smallmatrix} .81 \\ (20.57) \end{smallmatrix}$	$\begin{smallmatrix} .33 \\ (8.38) \end{smallmatrix}$	$\begin{smallmatrix} .23 \\ (5.84) \end{smallmatrix}$	$\begin{smallmatrix} .68 \\ (17.27) \end{smallmatrix}$	$\begin{smallmatrix} .19 \\ (4.83) \end{smallmatrix}$

NOTES :

1. UL LISTED AND CSA CERTIFIED FOR :
 - A. 600 V MAX. VOLTAGE RATING
 - B. 221°F (105°C) MAX. TEMP. RATING
 - C. #16-14 AWG (1.5-2.5 mm²) SOLID OR STRANDED, COPPER WIRE
2. PACKAGE QTY. : 3K = 3000 PCS.
CONTINUOUS MOLDED CARRIER STRIP
3. MATERIAL :
 - A. STAMPING - .03" THK COPPER, TIN PLATED
 - B. HOUSING - BLUE NYLON
 - C. SLEEVE - BRASS, TIN PLATED
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS :
 - A. PRESSES - CP-851, CP-860, CP-861
 - B. APPLICATOR - CA-800
 - C. DIE INSERTS - CD-800-2



6. WIRE STRIP LENGTH; $7/32^{+1/32}_{-0}$ (5.6 $^{+0.8}_{-0}$)



LISTED
587H
E52164



CERTIFIED
LR31212

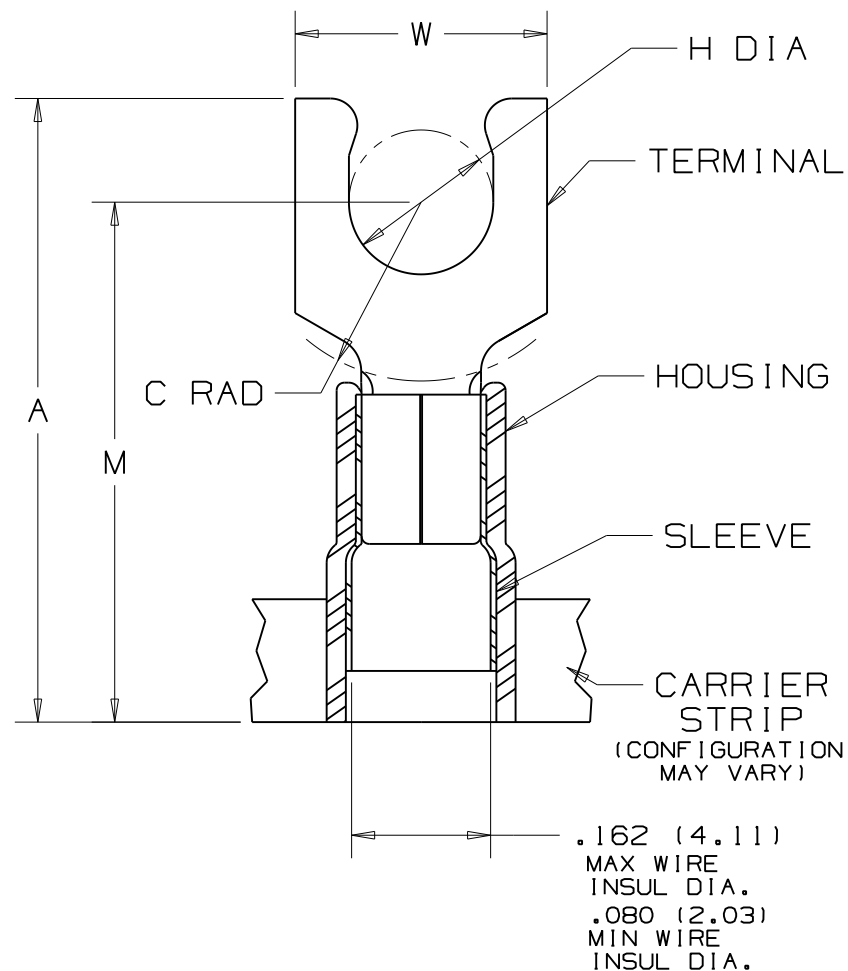

								 PANDUIT CORP. TINLEY PARK, ILLINOIS
05	11/07	SRB		Removed part # PN14-14SLF-3K Part Obsoleted				TERMO 3PC. CONTINUOUSLY MOLDED NYLON INSULATED, 16-14 BARREL, SHORT LOCKING FORKS
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	DRAWN BY FES
								CHK'D FS
								SCALE NONE
								DRAWING NO. A41090