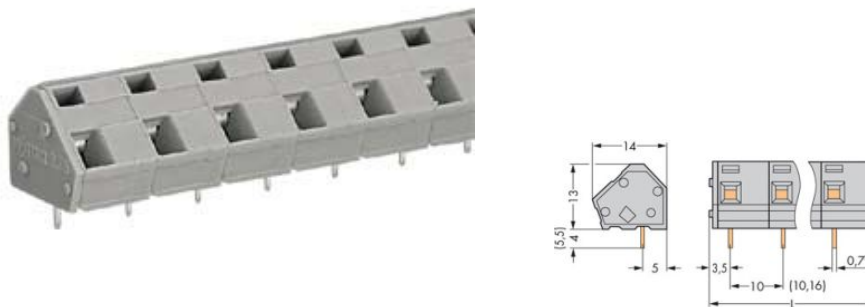

Item no.: 236-302
Product description: PCB TERMINAL STRIP 1 SOLDER PIN / POLE REAR 2 POLE
PIN SPACING 10/10.16 MM / 0.4 IN



Produkt kann von Bild abweichen / product may differ

Packing unit 200 4*50 pieces

Product group	4 (Printed Circuit)
Weight	2.65 g
Color	gray
No. of connection Points	2
No. of potentials	2
pole count	2
Height	13 mm
Height	0.512 in
Width	22.3 mm
Width	0.878 in
Depth	14 mm
Depth	0.551 in
Pin spacing from	10 mm
Pin spacing up to	10.16 mm
Pin spacing from	0.394 in
Pin spacing up to	0.4 in
Pollution degree	2
Measured voltage EN	1000 V
Measured shock voltage	8 kV
Current intensity EN	24 A

Pollution degree
Measured voltage EN

2
1000 V



Measured shock voltage	8 kV
Current intensity EN	24 A
Connection method	CAGE CLAMP® CONNECTION
Cross section [mm²]	0.08 - 2.5 mm²
Wiring method	solid
Cross section [mm²]	0.08 - 2.5 mm²
Cross section [mm²]	0.25 - 1.5 mm²
Cross section [mm²]	0.25 - 1.5 mm²
Cross section [AWG]	28 - 12 AWG
Strip length from	5 mm
Strip length to	6 mm
Material group	I
xxx-xxx/000-004	black
xxx-xxx/000-006	blue
xxx-xxx/000-008	dark gray
xxx-xxx/000-009	light gray
xxx-xxx/000-012	orange
xxx-xxx/000-017	light green
xxx-xxx/000-023	green
xxx-xxx/332-xxx	with 2 solder pins/pole and 5,5 mm long solder pins
xxx-xxx/334-000	with 2 solder pins/pole and 3,6 mm long solder pins



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm²]
236-302	BV	11915/BO	1000/500	16	0,08-2,5
236-302	CCA	NL6247	500	24	0,08-2,5
236-302	CSA	154112-1673957	300	15	24-12
236-302	DNV	E-9215	500	16	0,5-2,5
236-302	GL	17296-00HH	1000/500	16	0,5-2,5
236-302	KEMA	2110204.01	500	24	0,08-2,5
236-302	NEMKO	M58459/03	500		2,5
236-302	RMR	11130002	500	16	0,5-2,5
236-302	SEMKO	9411003	400		2,5
236-302	UR	E45172	300	10	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected