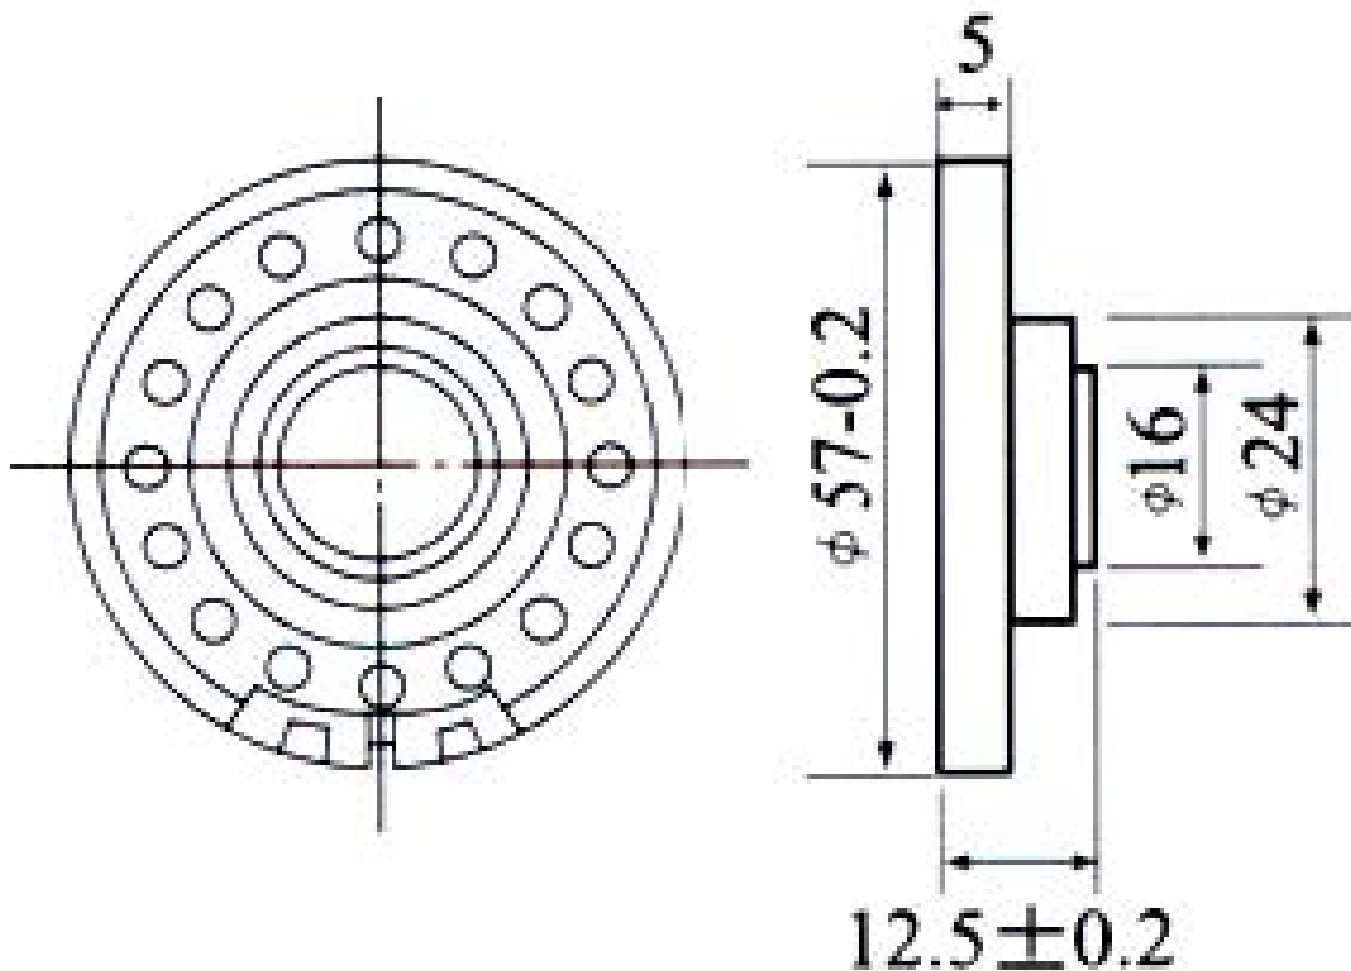


**Sales Outline Drawing**
**Revision B**
**Specifications:**

|                                   |                                           |
|-----------------------------------|-------------------------------------------|
| Voice Coil Impedance ( $\Omega$ ) | $8 \pm 15\%$ at 800 Hz / 1.0 V            |
| Rated Input (W)                   | 0.25                                      |
| Max. Input (W)                    | 0.50                                      |
| Lowest Resonance Freq $F_o$ (Hz)  | $350 \pm 20\%$                            |
| Frequency Range (Hz)              | $F_o \sim 5000$                           |
| Output S.P.L. (dB)                | $90 \pm 3$ at 1W 1M .8k, 1k, 1.2k, 1.5kHz |
| Magnet Size (mm)                  | $\varnothing 21.0 * 5.0$                  |
| Magnet                            | Ferrite                                   |
| Core Material Mylar               | Transparent Radial                        |
| Frame Material                    | Plastic                                   |
| Operation / Storage Temp          | -25 to 50°C                               |
| Options                           | For other options contact factory         |

**Dimensions:** (units: mm)

**ROHS Compliant**


# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PSR-57F08S02-JQ](#)