


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PV10-6SLFB-2K	#6	.84 (21.33)	.25 (6.35)	.17 (4.32)	.73 (18.54)	.14 (3.56)
PV10-8SLFB-2K	#8	.90 (22.86)	.29 (7.37)	.22 (5.59)	.77 (19.56)	.16 (4.06)
PV10-10SLFB-2K	#10	.91 (23.11)	.33 (8.38)	.22 (5.59)	.77 (19.56)	.19 (4.83)



1. UL LISTED AND CSA CERTIFIED FOR :
A. 600 V MAX. VOLTAGE RATING
B. 221°F (105°C) MAX. TEMP. RATING
C. #12-10 AWG (2.5-6.0 mm²) STRANDED, COPPER WIRE ONLY
2. PACKAGE QTY. : 2K = 2000 PCS.
CONTINUOUS MOLDED CARRIER STRIP
3. MATERIAL :
A. STAMPING - .04" THK COPPER, TIN PLATED
B. HOUSING - YELLOW VINYL
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS :
A. PRESSES - CP-851, CP-860, CP-861, CP-862
B. APPLICATOR - CA-800, CA9
C. DIE INSERTS - CD-800-3, CD9-3B
6. WIRE STRIP LENGTH: 11/32 +1/32 (8.7 +0.8)
-0 -0


LISTED
587H
552164

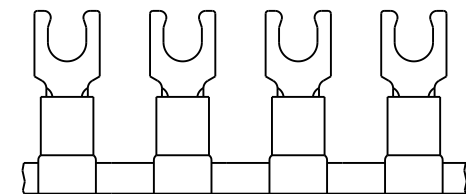

LISTED
587H
E52164



CERTIFIED
LR31212

											PANDUIT CORP TINLEY PARK, ILLINOIS			
											TERMO 2PC CONTINUOUSLY MOLDED VINYL INSULATED, #12-10 BARREL, SHORT LOCKING FORKS			
05	10/07	SRB		Removed part # PV10-14SLFB-2K Part obsoleted							DRAWN BY	CHK'D	SCALE	DRAWING NO.
REV	DATE	BY	CHK	DESCRIPTION		ECN	QA	CUST	PM	APP	FES	FES	NONE	A41073