

Part number		STUD SIZE	Maximum insulation diameter	DIMENSIONS in.			
Prefix	PK			A $\pm .03$ (.8)	W $\pm .010$ (.25)	C MM	G $\pm .03$ (.8)
PV14-6FF	-C -M	#6	.165 (4,19)	.88 (23,4)	.28 (7,1)	.19 (4,8)	.72 (18,3)
PV14-8FF	-C -M	#8		.94 (23,9)	.31 (7,9)	.23 (5,8)	.76 (19,3)
PV14-10FF	-C -M	#10		.94 (23,9)	.35 (8,9)	.23 (5,8)	.76 (19,3)

NOTES:

1. Used for:

- A. 600 max voltage rating.
 B. #16-14 AWG Solid or stranded copper wire range, Temperature rating of insulation: 105°C(221°F) with CT-1551, CT-1550 installation tools.
 C. #16-14 AWG Solid or stranded copper wire range, 75°C(167°F) max temp rating with CT-100 installation tool

2. Wire strip length: 5/16 $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ (7,9 $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$)


3. Package Quantity (Suffix to basic part no.)

- A. Standard -C=100
 B. Bulk -M=1000

4. Material:

- A. Stamping: .032 (.81) thick tin plated copper
 B. Housing: Blue vinyl

5. Dimensions in brackets are in millimeters

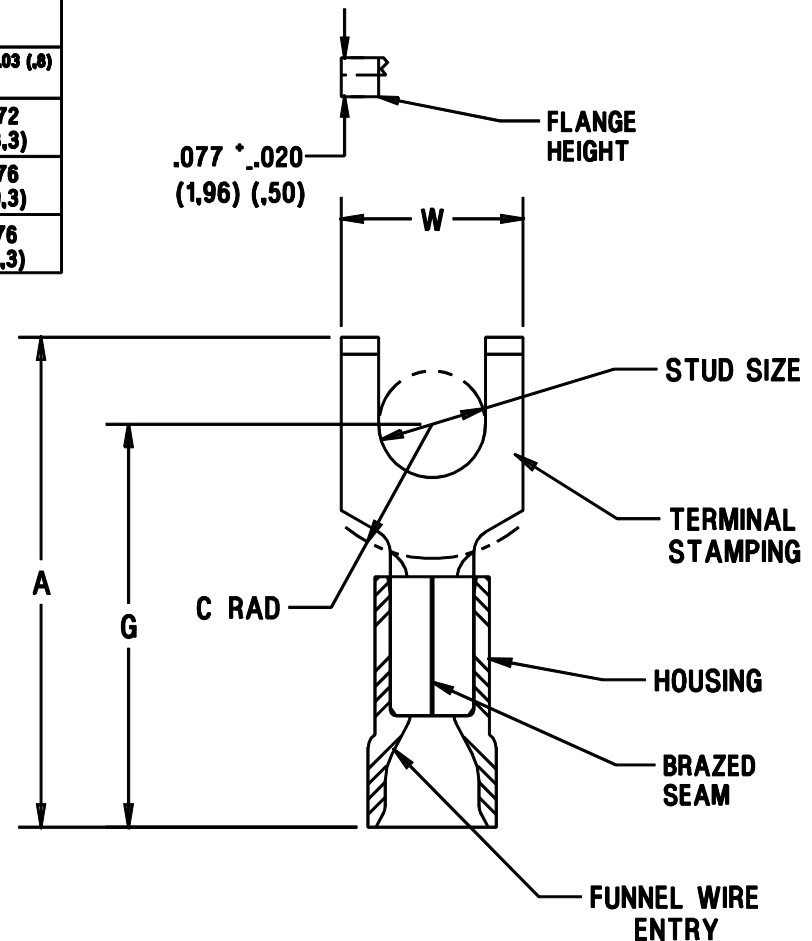

LISTED
587H
E52164



CERTIFIED
LR31212

A41573_03

03	01/01	EJS		FILE SPEC WAS IN41573AA_PCB_02.REMOVED INSTALLATION TOOLS FROM NOTE 1-B, ADDED "FLANGE HEIGHT" NOTE TO DESL, UPDATED NOTE 1-B TO TEMP RATING OF INSULATION: 105°C(221°F)				 CORP. TINLEY PARK, ILLINOIS
02	5/99	JKD	SKB	ADDED CT-1551 & CT-1550 TOOLS	07632	TRO	JCJ	
01	11/94	MS		ADDED UL/CSA APPROVAL SYMBOLS	02639	JJM	LA	
00	8/94	MS	WJB	RELEASED	02387	KS	LA	
REV	DATE	BY	CHK	DESCRIPTION	ECN NO.	PM	CUST	DRAWN BY MS CMT'D SCALE NONE DRAWING NO. A41573

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PV14-6FF-C](#) [PV14-6FF-M](#) [PV14-8FF-C](#) [PV14-8FF-M](#) [PV14-10FF-C](#) [PV14-10FF-M](#)