

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .03$	W $\pm .01$	C $\pm .015$	M $\pm .03$	H $\pm .01$
PV14-6FX	#6	.89 (22.61)	.28 (7.11)	.16 (4.06)	.75 (19.05)	.15 (3.81)
PV14-8FX	#8	.96 (24.38)	.31 (7.87)	.20 (5.08)	.79 (20.07)	.17 (4.32)
PV14-10FX	#10	.97 (24.64)	.34 (8.64)	.22 (5.59)	.80 (20.32)	.20 (5.08)

NOTES:


1. UL LISTED & CSA CERTIFIED FOR
A. 600 V. MAX VOLTAGE RATING
(1000 V. MAX IN SIGNS, FIXTURES
AND LUMINAIRES).
- B. 18-14 AWG SOLID OR STRANDED
COPPER WIRE & 221°F (105°C) MAX
TEMP RATING, WITH THE CT-500, CT-550
CT-1551, CT-1550 INSTALLATION TOOLS.
- C. 16-14 AWG SOLID OR STRANDED
COPPER WIRE & 167°F (75°C) MAX
TEMP RATING WITH THE CT-100
INSTALLATION TOOLS.
2. MATERIAL:
A. STAMPING - .03 (.08) THK COPPER, TIN PLATED
B. HOUSING - VINYL, BLUE
3. STRIP LENGTH 5/16 $\pm 1/32$ $\pm .0$
4. PACKAGE QTY:
-C=100
-M=1000
5. DIMENSIONS IN BRACKETS ARE
IN MILLIMETERS.



LISTED
587H
E52164



CERTIFIED
LR31212

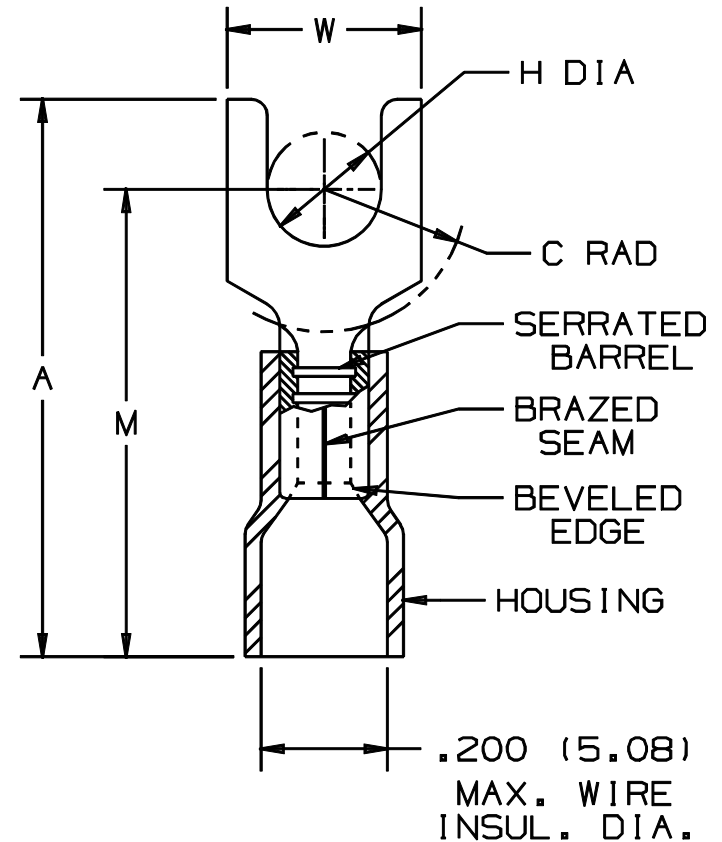

A41258_06

06	1/01	RM		FILESPEC WAS N41258AA_PCD_05				TINLEY PARK, ILLINOIS
05		JKD		ADDED CT-1551 & CT-1550 TOOLS	07634			
4	9-94	MS	RLS	TEMP. RATING (221°F) WAS 212°F	02482	LA	TM	
3	9-94	MS	RS	REVISED DIMENSIONS AND NOTES 02476	02476	LA		
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	#16-14 BARREL VINYL INSULATED FORK, .200 (5.08) MAX WIRE INSUL DIA.
								DRAWN BY DAW CHK'D RLS SCALE NONE DRAWING NO. A41258

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PV14-8FX-M](#) [PV14-6FX-M](#) [PV14-10FX-M](#) [PV14-10FX-C](#) [PV14-6FX-C](#) [PV14-8FX-C](#)