


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT<br>PART NUMBER | STUD<br>SIZE | DIMENSIONS - in. |                |                |                 |                | TOOLS                    |
|------------------------|--------------|------------------|----------------|----------------|-----------------|----------------|--------------------------|
|                        |              | A<br>± .020      | W<br>± .010    | C<br>± .015    | M<br>± .020     | H<br>± .010    |                          |
| PV2-10RX               | #10          | 1.94<br>(49.28)  | .68<br>(17.27) | .58<br>(14.73) | 1.60<br>(40.64) | .20<br>(5.08)  | CT-720<br>(CD-720PV8-2)  |
| PV2-14RX               | 1/4"         | 1.94<br>(49.28)  | .68<br>(17.27) | .58<br>(14.73) | 1.60<br>(40.64) | .27<br>(6.86)  |                          |
| PV2-56RX               | 5/16"        | 1.94<br>(49.28)  | .68<br>(17.27) | .58<br>(14.73) | 1.60<br>(40.64) | .33<br>(8.38)  |                          |
| PV2-38RX               | 3/8"         | 1.94<br>(49.28)  | .68<br>(17.27) | .58<br>(14.73) | 1.60<br>(40.64) | .39<br>(9.91)  | CT-2600<br>(CD-2600-PV2) |
| PV2-12RX               | 1/2"         | 2.03<br>(51.56)  | .86<br>(21.84) | .58<br>(14.73) | 1.60<br>(40.64) | .52<br>(13.21) |                          |

#### NOTES:

- cULus LISTED FOR:
  - 600V MAX VOLTAGE RATING
  - 221° F (105° C) MAX TEMP RATING
  - #2 AWG STRANDED COPPER WIRE
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- MATERIAL:
  - STAMPING - .060" (1.52) THK, COPPER  
TIN PLATED
  - HOUSING - VINYL, RED
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- WIRE STRIP LENGTH: 1/2 + 1/32 [ 12.7 + .8 ]  
- 0 - 0

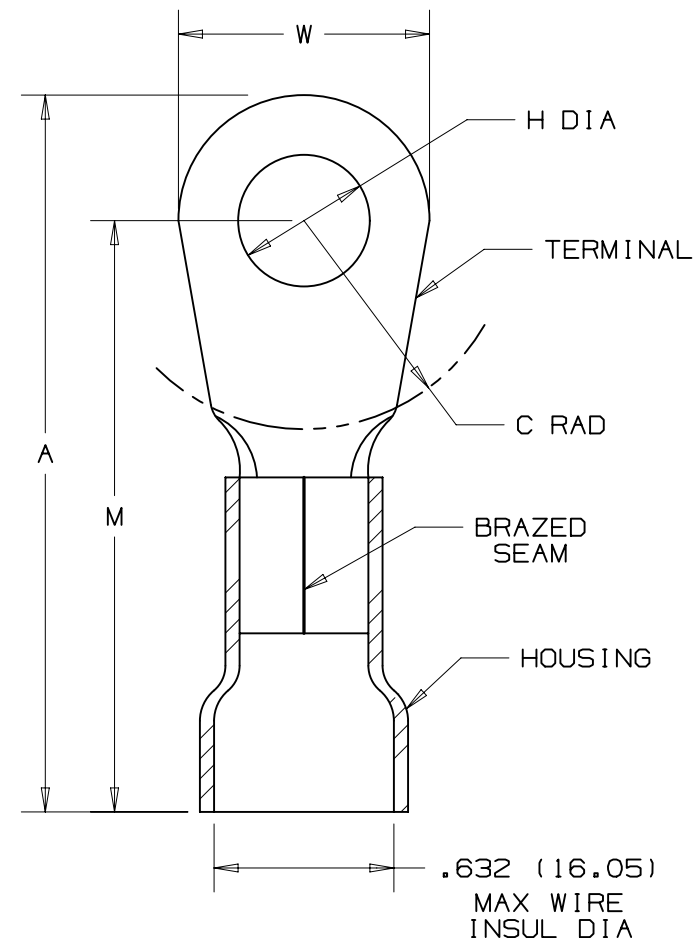

|                                                                                          |  |                                                 |     |
|------------------------------------------------------------------------------------------|--|-------------------------------------------------|-----|
| TITLE<br>#2 BARREL VINYL INSULATED RING TONGUE<br>.632 (16.05) MAX. WIRE INSUL. DIAMETER |  |                                                 |     |
| CUSTOMER DRAWING                                                                         |  |                                                 |     |
| ITEM REVISION NAME<br>N41220BA_A41220/07                                                 |  | <b>PANDUIT</b>                                  |     |
| DATASET FILE NAME<br>N41220BA_A41220/07                                                  |  |                                                 |     |
| UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE: IN [ mm ]                     |  | MATERIAL:<br>SEE NOTE 3                         |     |
| .X ±<br>.XX ±<br>                                                                        |  | .XXX ±<br>ANGLES ±<br>THIRD ANGLE<br>PROJECTION |     |
| DRAWN BY<br>DAW                                                                          |  | DATE                                            | CHK |
| SCALE<br>NONE                                                                            |  | SHT 1 OF 1                                      |     |
| ECN                                                                                      |  | SIZE<br>A                                       |     |