

## Series PVG612APbF

Microelectronic Power IC

HEXFET® Power MOSFET Photovoltaic Relay

Single Pole, Normally Open, 0-60V, 2.0A AC/ 4.0 A DC

### General Description


The PVG612A Series Photovoltaic Relay is a single-pole, normally open solid-state relay that can replace electromechanical relays in many applications. It utilizes International Rectifier's proprietary HEXFET power MOSFET as the output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.

These units exceed the performance capabilities of electromechanical relays in operating life, sensitivity, stability of on-resistance, miniaturization, insensitivity to magnetic fields and ruggedness. The compact PVG612A is particularly suited for isolated switching of high currents from 12 to 48 Volt AC or DC power sources.

Series PVG612A Relays are packaged in a 6-pin, molded DIP package with either thru-hole or surface mount (gull-wing) terminals. It is available in standard plastic shipping tubes or on tape-and-reel. Please refer to Part Identification information opposite.

### Features

- Bounce-free operation
- High load current capacity
- High off-state resistance
- Linear AC/DC operation
- 4,000 V<sub>RMS</sub> I/O Isolation
- Solid-State reliability
- UL recognized
- ESD Tolerance:
  - 4000V Human Body Model
  - 500V Machine Model

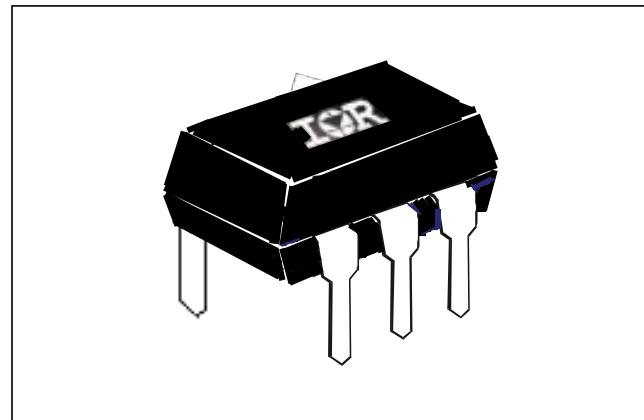

### Applications

- Programmable Logic Controllers
- Computers and Peripheral Devices
- Audio Equipment
- Power Supplies and Power Distribution
- Control of Displays and Indicators
- Industrial Automation

### Part Identification

PVG612APbF	thru-hole
PVG612ASPbF	surface-mount
PVG612AS-TPbF	surface-mount, tape and reel

*(HEXFET is the registered trademark for International Rectifier Power MOSFETs)*

**Electrical Specifications** (-40°C ≤ TA ≤ +85°C unless otherwise specified)



<b>INPUT CHARACTERISTICS</b>	<b>Limits</b>	<b>Units</b>
Minimum Control Current (see figure 1)	5.0	mA
Maximum Control Current for Off-State Resistance @ TA = +25°C	0.4	mA
Control Current Range (Caution: current limit input LED, see figure 6)	5.0 - 25	mA
Maximum Reverse Voltage (1mA max.)	6.0	V

<b>OUTPUT CHARACTERISTICS</b>	<b>Limits</b>	<b>Units</b>
Operating Voltage Range	0 to ±60	V(DC or AC peak)
Maximum Continuous Load Current @ TA = +40°C, 10mA Control (see figure 1)		
A Connection	2.0	A (AC or DC)
B Connection	2.5	A (DC)
C Connection	4.0	A (DC)
Maximum Pulsed Load Current @ TA = +25°C (100 ms @ 10% Duty Cycle)		
A Connection	7.5A	(AC or DC)
B Connection	8.5	A (DC)
C Connection	15.5	A (DC)
Typical Thermal Resistance (Rthja, Junction-to-Ambient)		
A Connection	79.1	(°C/W)
B Connection	112.2	(°C/W)
C Connection	81.0	(°C/W)
Maximum On-State Resistance @ TA = +25°C For 1A pulsed load, 10mA Control (see figure 4)		
A Connection	100	mΩ
B Connection	50	mΩ
C Connection	35	mΩ
Maximum Off-State Leakage @ 60V, TA = +25°C	1.0	µA
Maximum Turn-On Time @ TA = +25°C (see figures 7 & 8) For 500mA, 50VDC load, 10mA Control, 10mS pulse width	3.5	ms
Maximum Turn-Off Time @ TA = +25°C (see figures 7 & 8) For 500mA, 50VDC load, 10mA Control, 10mS pulse width	0.5	ms
Typical Output Capacitance @ Vdd=50V, f=1MHz (see figure 2)	105	pF


<b>GENERAL CHARACTERISTICS</b>	<b>Limits</b>	<b>Units</b>
Minimum Dielectric Strength, Input-Output	4000	VRMS
Minimum Insulation Resistance, Input-Output, @ TA = +25°C, 50%RH, 100VDC	10 <sup>12</sup>	Ω
Maximum Capacitance, Input-Output	1.0	pF
Maximum Pin Soldering Temperature (10 seconds maximum)	+260	
Ambient Temperature Range:	Operating Storage	°C

International Rectifier does not recommend the use of this product in aerospace, avionics, military or life support applications. Users of this International Rectifier product in such applications assume all risks of such use and indemnify International Rectifier against all damages resulting from such use.


## Connection Diagrams

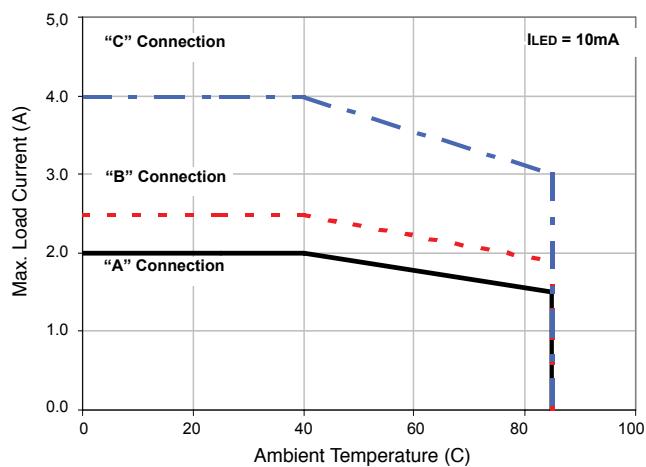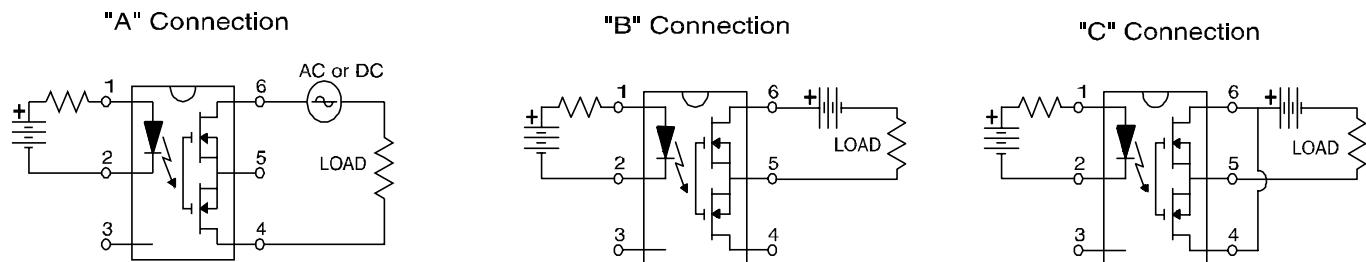


**Figure 1. Current Derating Curves**

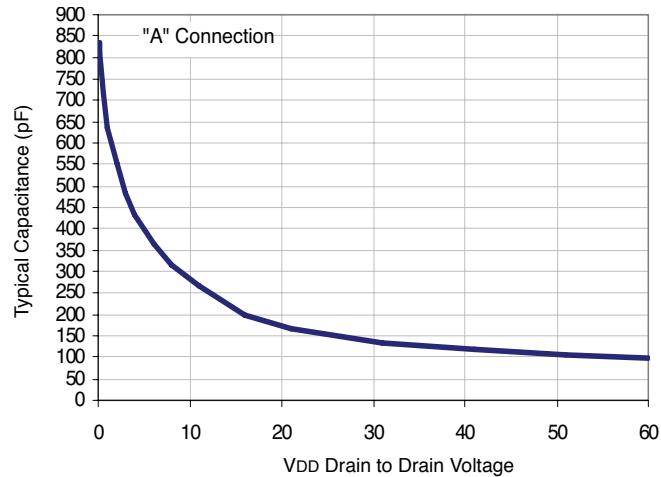


**Figure 2. Typical Output Capacitance**

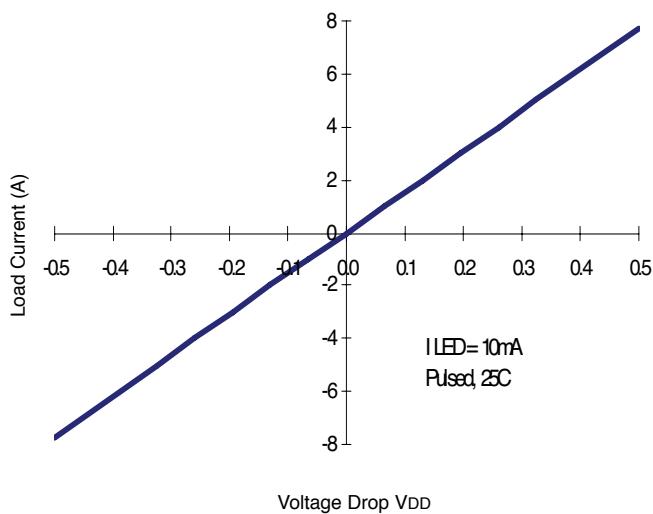


**Figure 3. Typical Linearity Characteristics**

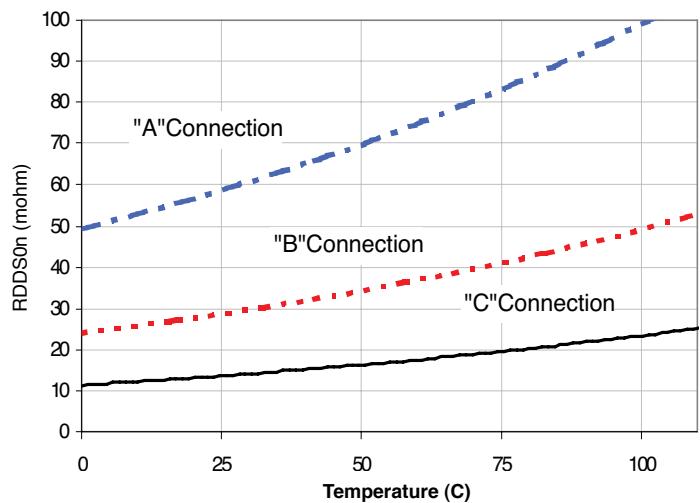


**Figure 4. Typical Normalized On-Resistance**

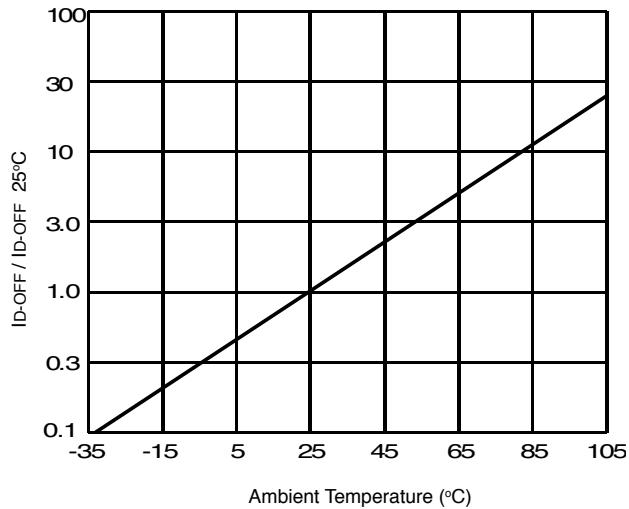


**Figure 5. Typical Normalized Off-State Leakage**

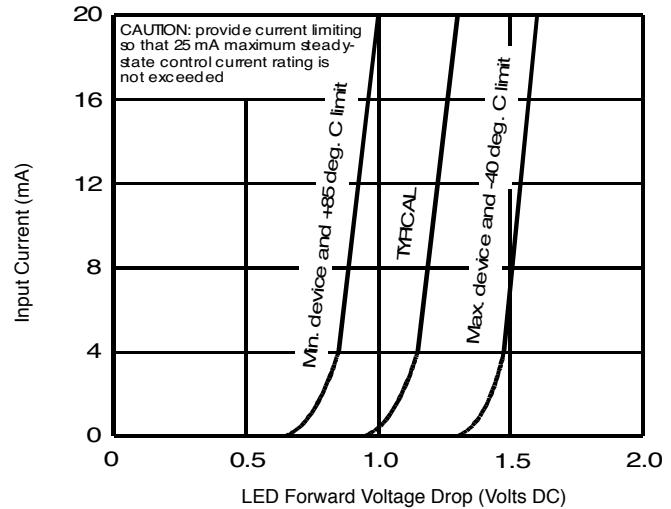

**Figure 6. Input Characteristics (Current Controlled)**

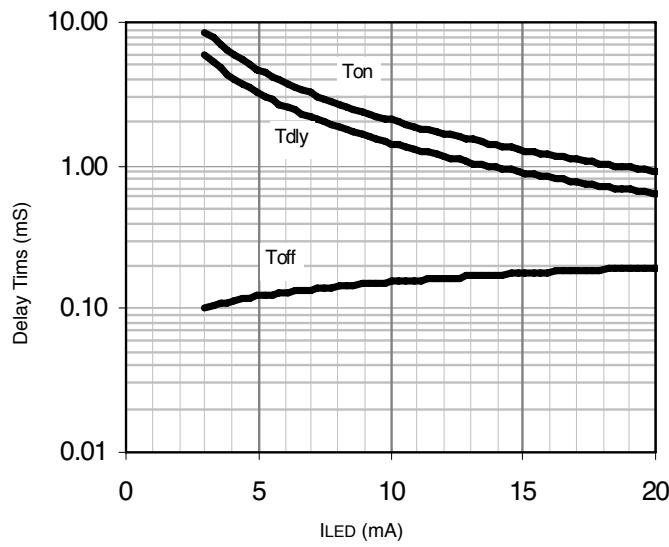

**Figure 7. Typical Delay Times**

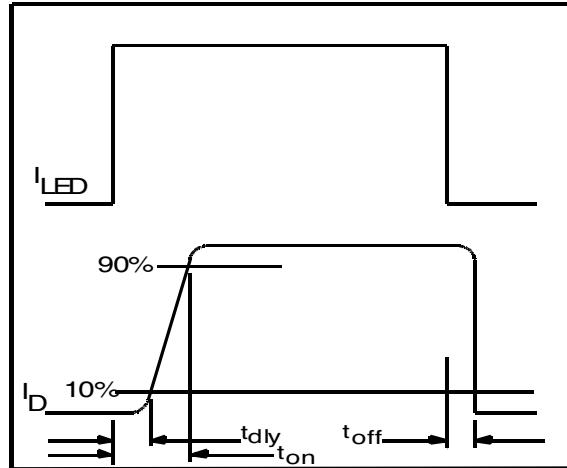

**Figure 8. Delay Time Definitions**

## Case Outlines

