

### Microelectronic Power IC

HEXFET® Power MOSFET Photovoltaic Relay

Single-Pole, Normally-Open, 0-20V, 4.0A AC / 6.0A DC

### General Description

The PVN012A Series Photovoltaic Relay at 50 milliohms features the lowest possible on-state resistance in a miniature package — lower than a comparable reed relay.

The PVN012A is a single-pole, normally open solid-state relay. It utilizes a HEXFET® MOSFET output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.

These units exceed the performance capabilities of electromechanical relays in life, sensitivity, stable on-resistance, miniaturization, magnetic insensitivity and ruggedness. They are ideally suited for switching high currents or low level signals without distortion or injection of electrical noise.


Series PVN012A relays are packaged in a 6-lead molded DIP package with either thru-hole or surface mount (gull-wing) terminals. They are available in standard plastic shipping tubes or on tape-and-reel. Please refer to part identification information.

### Applications

- Portable Electronics
- Computers and Peripheral Devices
- Audio Equipment
- Power Supplies and Power Distribution
- Instrumentation

### Features

- 50mΩ On-Resistance
- Bounce-free Operation
- 4.0 - 6.0 Amp Capacity
- Linear AC/DC Operation
- 4,000 V<sub>RMS</sub> I/O Isolation
- Solid-State Reliability
- UL Recognized
- ESD Tolerance:
  - 4000V Human Body Model
  - 500V Machine Model

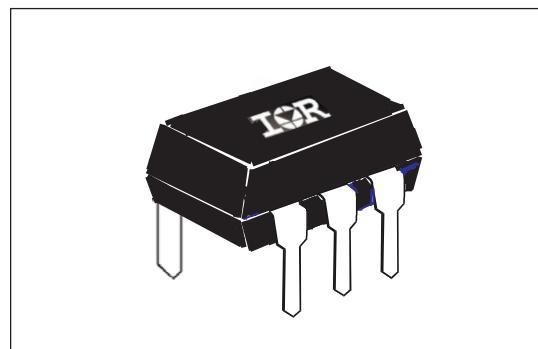

### Part Identification

PVN012APbF

thru-hole

PVN012ASPbF

surface-mount

PVN012AS-TPbF

surface-mount, tape  
and reel

*(HEXFET is the registered trademark for International Rectifier Power MOSFETs)*

**Electrical Specifications** (-40°C ≤ T<sub>A</sub> ≤ +85°C unless otherwise specified)

| INPUT CHARACTERISTICS   | Limits      | Units |
|---|-------------|-------|
| Minimum Control Current (see figure 1)                                    | 5.0         | mA    |
| Maximum Control Current for Off-State Resistance @ T <sub>A</sub> = +25°C | 0.4         | mA    |
| Control Current Range (Caution: current limit input LED, see figure 6)    | 5.0 to 25.0 | mA    |
| Maximum Reverse Voltage   | 6.0         | V     |

| OUTPUT CHARACTERISTICS  | Limits   | Units            |
|---|----------|------------------|
| Operating Voltage Range   | 0 to ±20 | V(DC or AC peak) |
| Maximum Continuous Load Current @ 40°C, 10mA Control (see figure 1)   |          |                  |
| A Connection  | 4.0      | A (DC or AC)     |
| B Connection  | 4.5      | A (DC)           |
| C Connection  | 6.0      | A (DC)           |
| Maximum Pulsed Load Current @ 25°C, 10mA Control (100 mS @ 10% duty cycle)                                  |          |                  |
| A Connection  | 8.0      | A (DC or AC)     |
| B Connection  | 9.0      | A (DC)           |
| C Connection  | 15.0     | A (DC)           |
| Typical Thermal Resistance (T <sub>thja</sub> , Junction-to-Ambient)  |          |                  |
| A Connection  | 85.1     | (°C/W)           |
| B Connection  | 122.9    | (°C/W)           |
| C Connection  | 89.7     | (°C/W)           |
| Maximum On-State Resistance @ 25°C, 10mA Control 100mA pulsed load, (see figs. 3 & 4)                       |          |                  |
| A Connection  | 50       | mΩ               |
| B Connection  | 25       | mΩ               |
| C Connection  | 15       | mΩ               |
| Maximum Off-State Leakage @ T <sub>A</sub> =+25°C, ±20V <sub>DC</sub>                                       | 1.0      | µA               |
| Maximum Turn-On Time @ T <sub>A</sub> =+25°C (see figure 7), for 1A, 20 V <sub>DC</sub> load, 10mA Control  | 3.0      | ms               |
| Maximum Turn-Off Time @ T <sub>A</sub> =+25°C (see figure 7), for 1A, 20 V <sub>DC</sub> load, 10mA Control | 0.5      | ms               |
| Typical Output Capacitance @ 20V <sub>DC</sub> (see figure 2)   | 400      | pF               |

| GENERAL CHARACTERISTICS   | Limits                    | Units            |
|---|---------------------------|------------------|
| Minimum Dielectric Strength, Input-Output                       | 4000                      | V <sub>RMS</sub> |
| Minimum Insulation Resistance, Input-Output                     | 10 <sup>12</sup>          | Ω                |
| Maximum Capacitance, Input-Output, V <sub>d</sub> =0V, f = 1MHz | 1.0                       | pF               |
| Maximum Pin Soldering Temperature                               | +260                      | °C               |
| Ambient Temperature Range:                                      | Operating<br>Storage      |                  |
|   | -40 to +85<br>-40 to +100 |                  |

International Rectifier does not recommend the use of this product in aerospace, avionics, military or life support applications. Users of this International Rectifier product in such applications assume all risks of such use and indemnify International Rectifier against all damages resulting from such use.

## Connection Diagrams

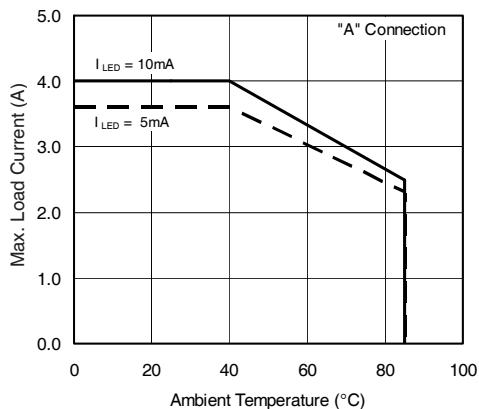
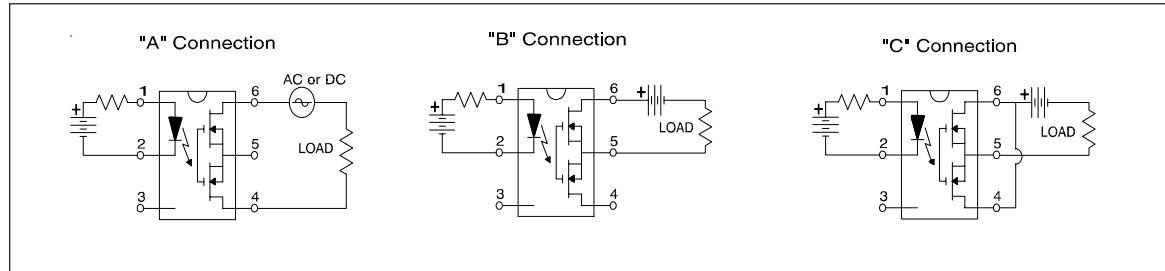


Figure 1. Current Derating Curves\*

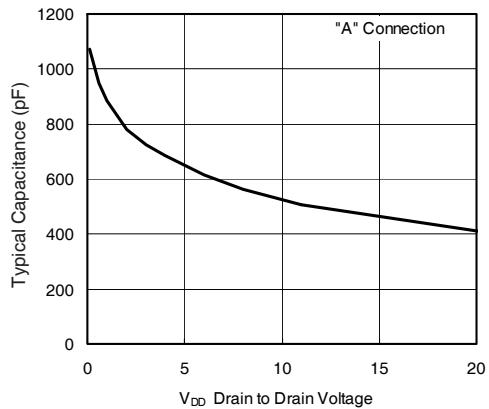


Figure 2. Typical Output Capacitance

\* Derating of 'B' and 'C' connections at +85°C will be 70% of that specified at +40°C and is linear from +40°C to +85°C.

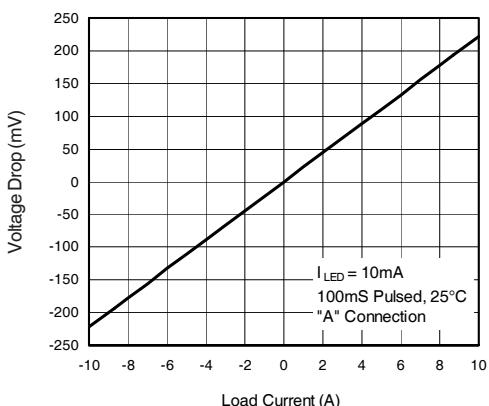


Figure 3. Linearity Characteristics



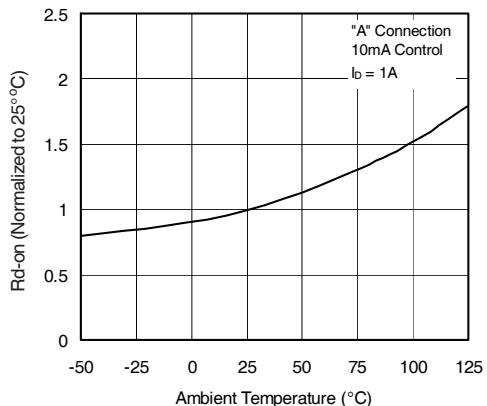



Figure 4. Typical Normalized On-Resistance

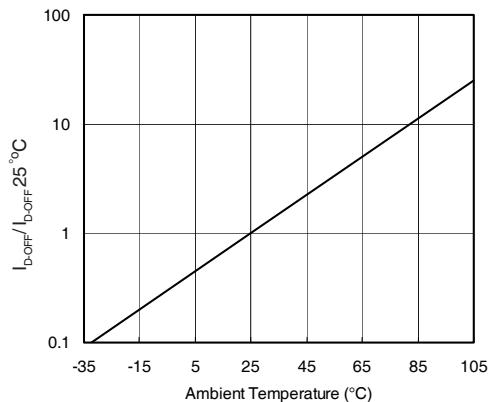


**Figure 5. Typical Normalized Off-State Leakage**

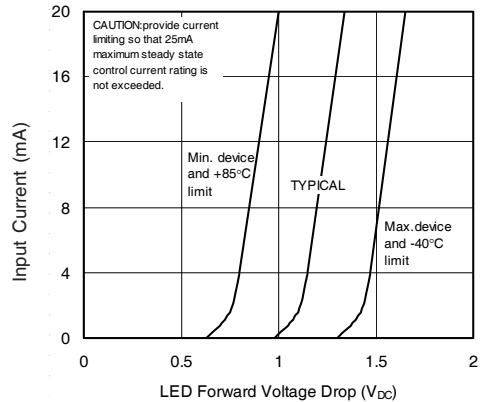

**Figure 6. Input Characteristics (Current Controlled)**


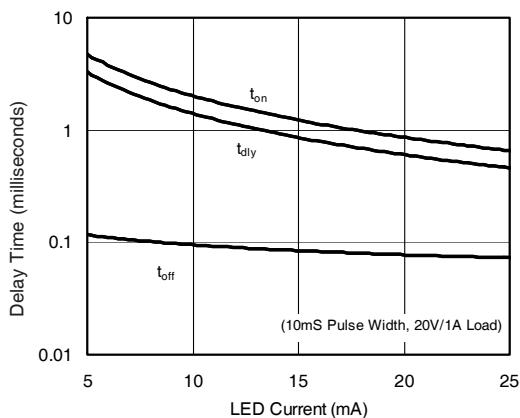


**Figure 7. Typical Delay Times**

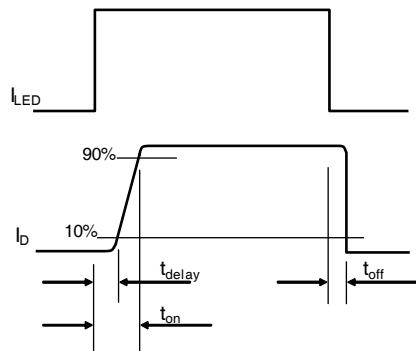

**Figure 8. Delay Time Definitions**

## Case Outlines

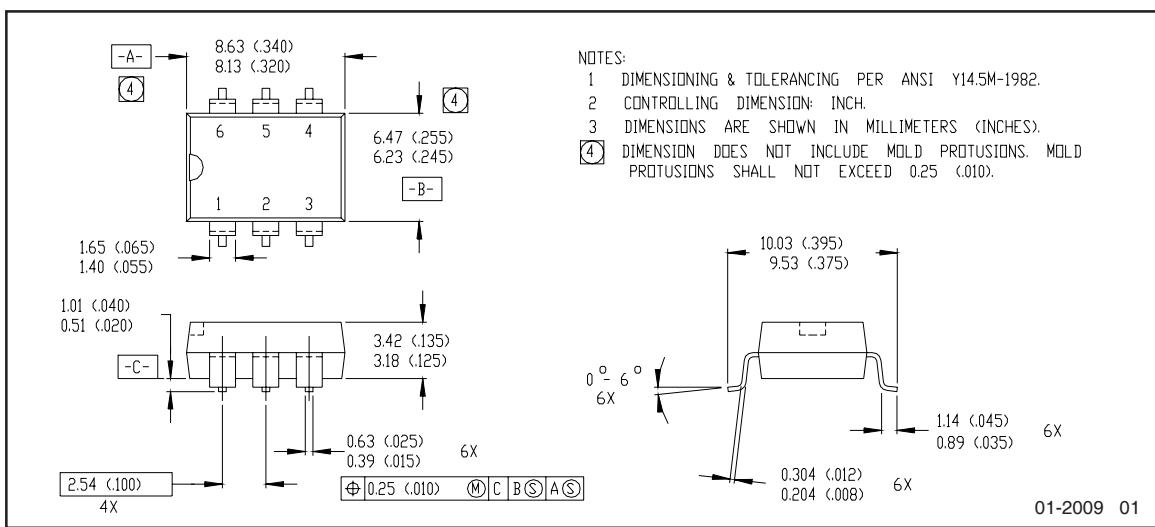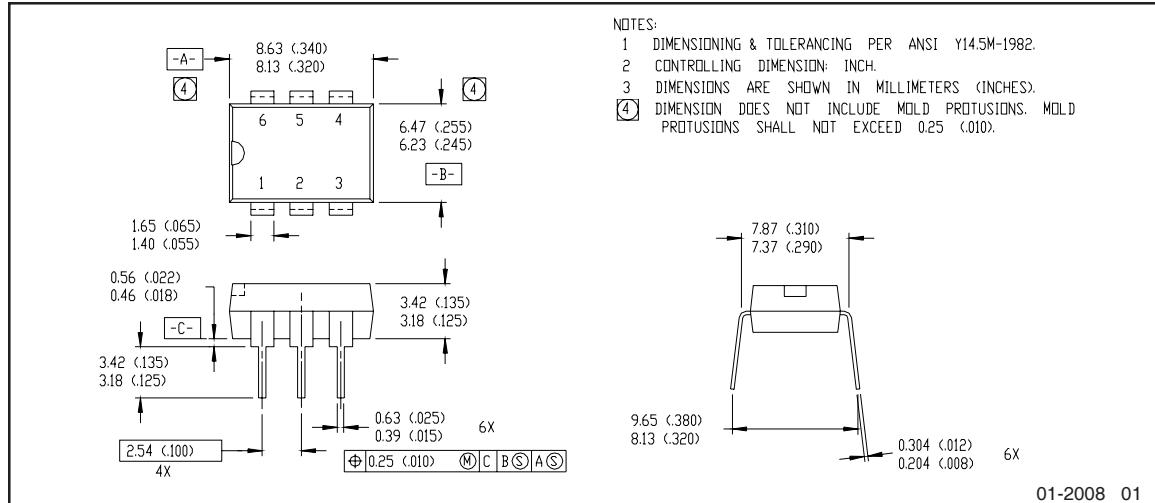

Note: For the most current drawing please refer to IR website at: <http://www.irf.com/package/>

**Qualification information<sup>†</sup>**

|                               |  |  |
|-------------------------------|--|--|
| Qualification level           | Industrial<br>(per JEDEC JESD47I <sup>††</sup> guidelines) |  |
| Moisture Sensitivity<br>Level | PVN012APbF   | N/A  |
|                               | PVN012ASPBf  | MSL4   |
|                               | PVN012AS-TPbF  | (per JEDEC J-STD-020E & JEDEC J-STD-033C <sup>††</sup> ) |
| RoHS compliant                | Yes  |  |

<sup>†</sup> Qualification standards can be found at International Rectifier's web site: <http://www.irf.com/product-info/reliability>

<sup>††</sup> Applicable version of JEDEC standard at the time of product release

**Revision History**

| Date      | Comments  |
|-----------|---|
| 5/11/2015 | <ul style="list-style-type: none"><li>• Added Qualification Information Table on page 6</li><li>• Updated data sheet with new IR corporate template</li></ul> |

International  
 Rectifier

**IR WORLD HEADQUARTERS:** 101 N. Sepulveda Blvd., El Segundo, California 90245, USA

Data and specifications subject to change without notice

To contact International Rectifier, please visit <http://www.irf.com/whoto-call/>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[International Rectifier:](#)

[PVN012APBF](#) [PVN012AS-TPBF](#) [PVN012ASPBF](#)