



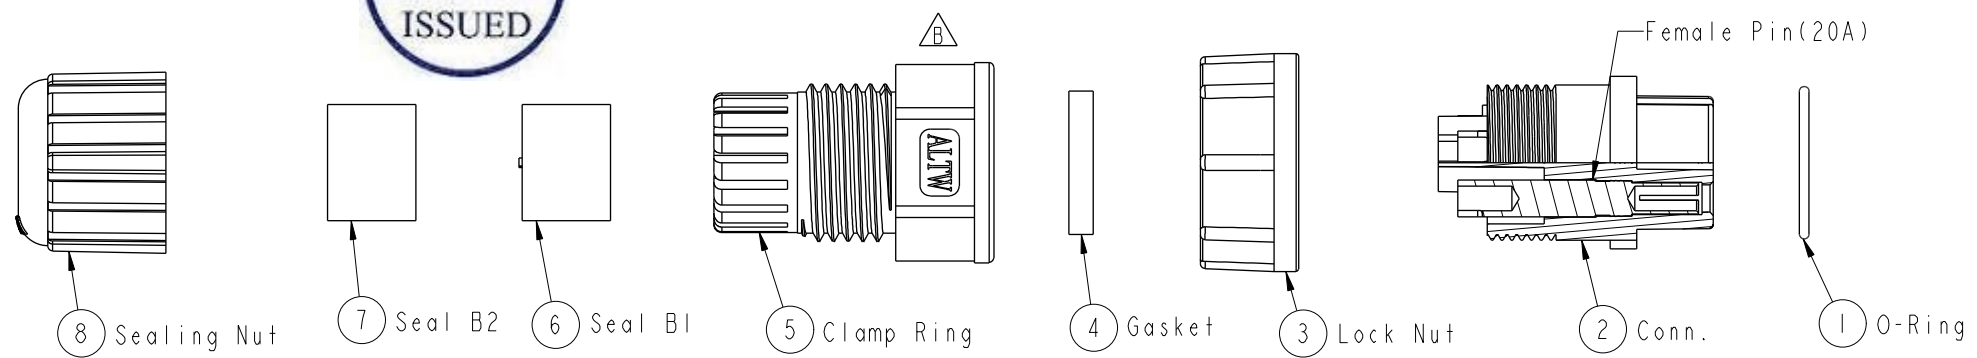


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/08/10	Aric	Change Rev.01 To Rev.A
B	LEN1741302	2017/04/20	Ruru	Change Logo

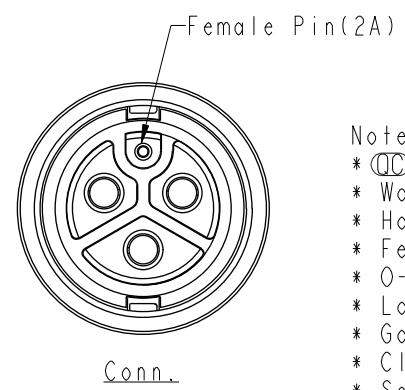

Pin Assignments
Front View

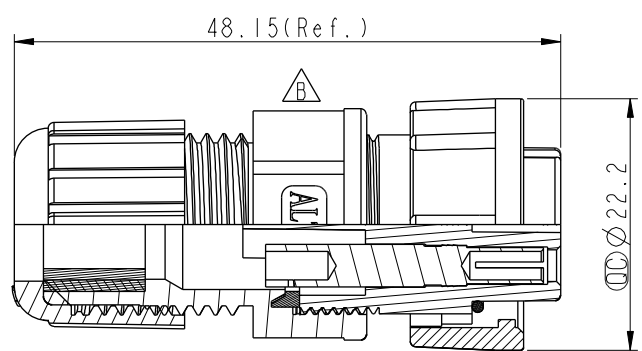

- Notes:
- * Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black .
 - * Female Pin: Copper Alloy, Gold Plated.
 - * O-Ring: Silicone, Gray.
 - * Lock Nut: Nylon+GF, Black .
 - * Gasket: Silicone, Gray.
 - * Clamp Ring: Nylon, Black .
 - * Sealing Nut: Nylon, Black.
 - * Seal B1 For Cable OD: $\varnothing 7.6\text{mm} \sim 9.6\text{mm}$
 - * Seal B2 For Cable OD: $\varnothing 4.0\text{mm} \sim 7.6\text{mm}$
 - * One Set Unassembled In One PE Bag.
 - * UL94V-0 rated materials.

A	UNIT:mm			TITLE			Power, Assy Lock 4Pins F Conn. F Pin 20Amps+2Amp		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
	TOLERANCE			SCALE	SIZE	SHEET					OF	PWCU-04BFFA-LL7002		Ruru		2017-04-20
	± 0.5mm			3:2	A4	I	I	PWCU-04BFFA-LL7002			CHECKED BY		DATE			
			REV.	B	WC-REV.	A.3	((C)):Inspection item				CUSTOMER		APPROVED BY		DATE	
										ALTW		Max		2017-04-20		
1		2		3		4		5		6		7		8		
														FWI10702-01-02A1		