


- NOTES:
- 1.0 SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: 2.0 to 8.0 GHz
 - 1.2 INSERTION LOSS: 1.4dB MAX.
 - 1.3 AMPLITUDE BALANCE: 1.0dB MAX.
 - 1.4 PHASE BALANCE: 15° MAX.
 - 1.5 VSWR: 1.50:1 MAX.
 - 1.6 ISOLATION: 15dB MIN.
 - 1.7 INPUT POWER: 30 WATTS MAX.
 - 1.8 WEIGHT: 21.2 Oz (600 GRAMS)

- 2.0 FINISH:
- GREY OVER MIL-E-15090 TYPE II, CLASS 2
 - OVER MIL-C-5541 CLASS 3A
 - MEETS MIL-F-14072
 - MEETS MIL-E-5400
- 2.1 MARKING: MARK UNIT AS SHOWN
(REF.: SLK-08068-82-01)

3.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

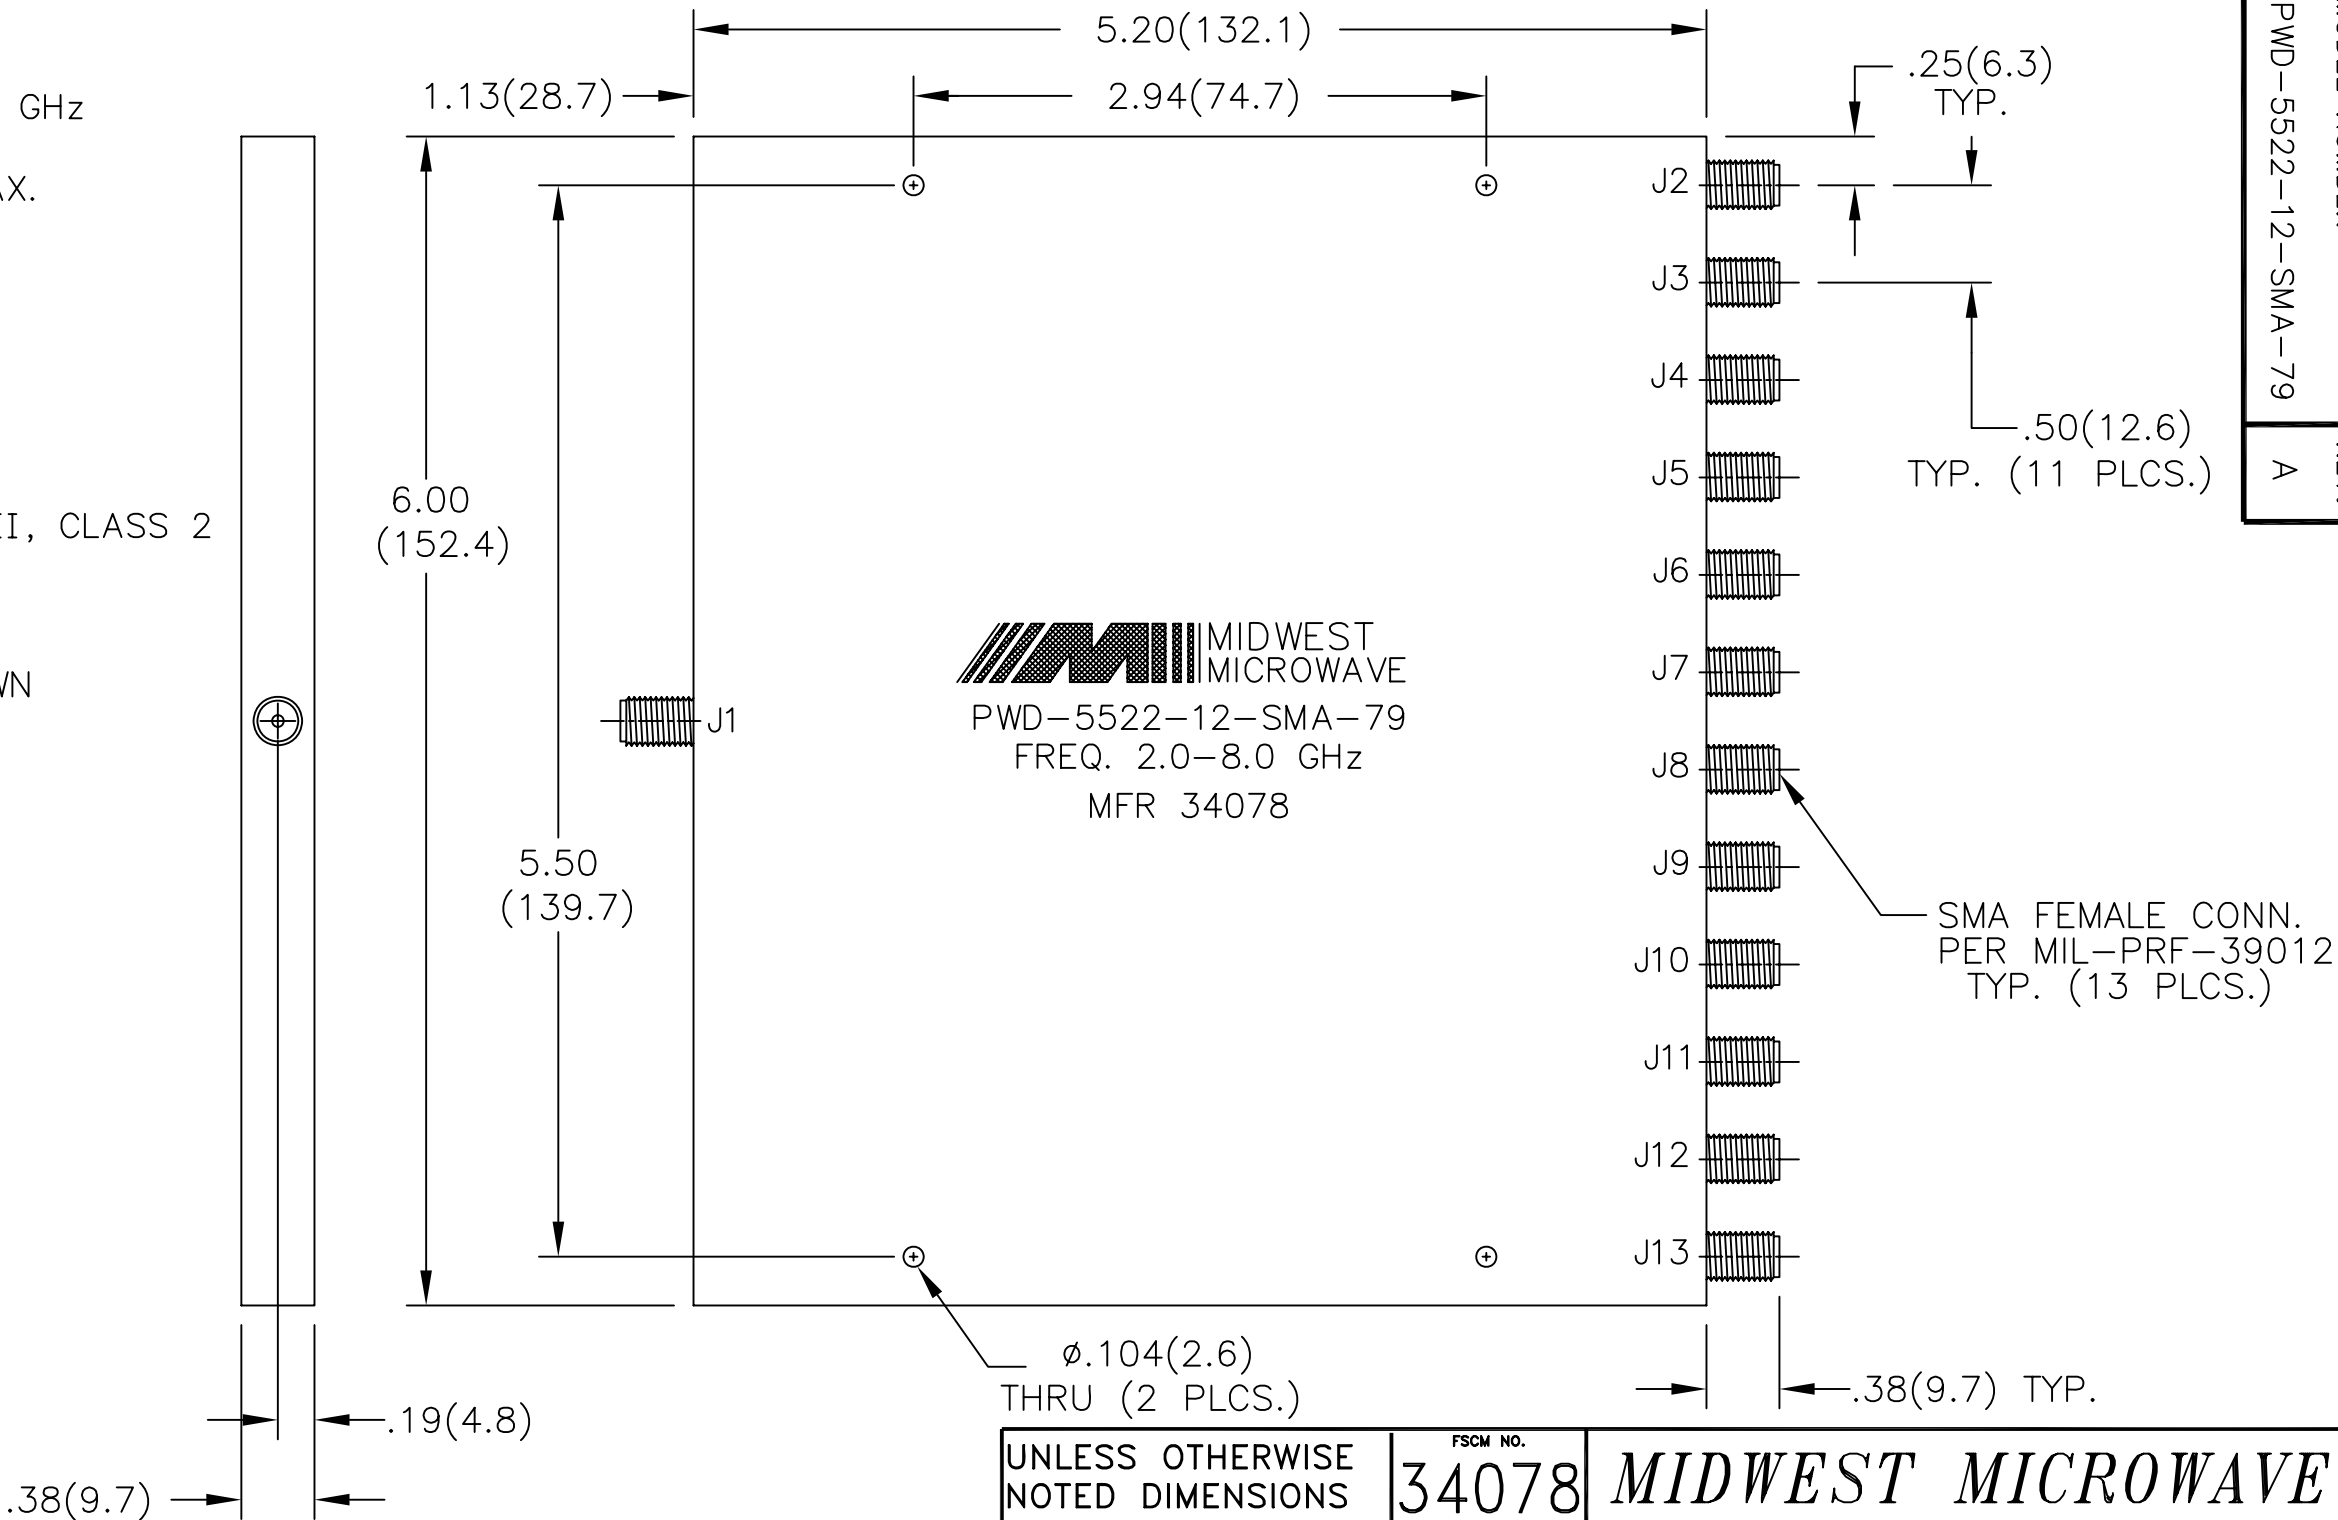

MODEL NUMBER
PWD-5522-12-SMA-79

REV.
A

REV.	DESCRIPTION	DATE
-	RELEASED	4/11/01
A	ECN 17954	5/14/01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[PWD-5522-12-SMA-79](#)