


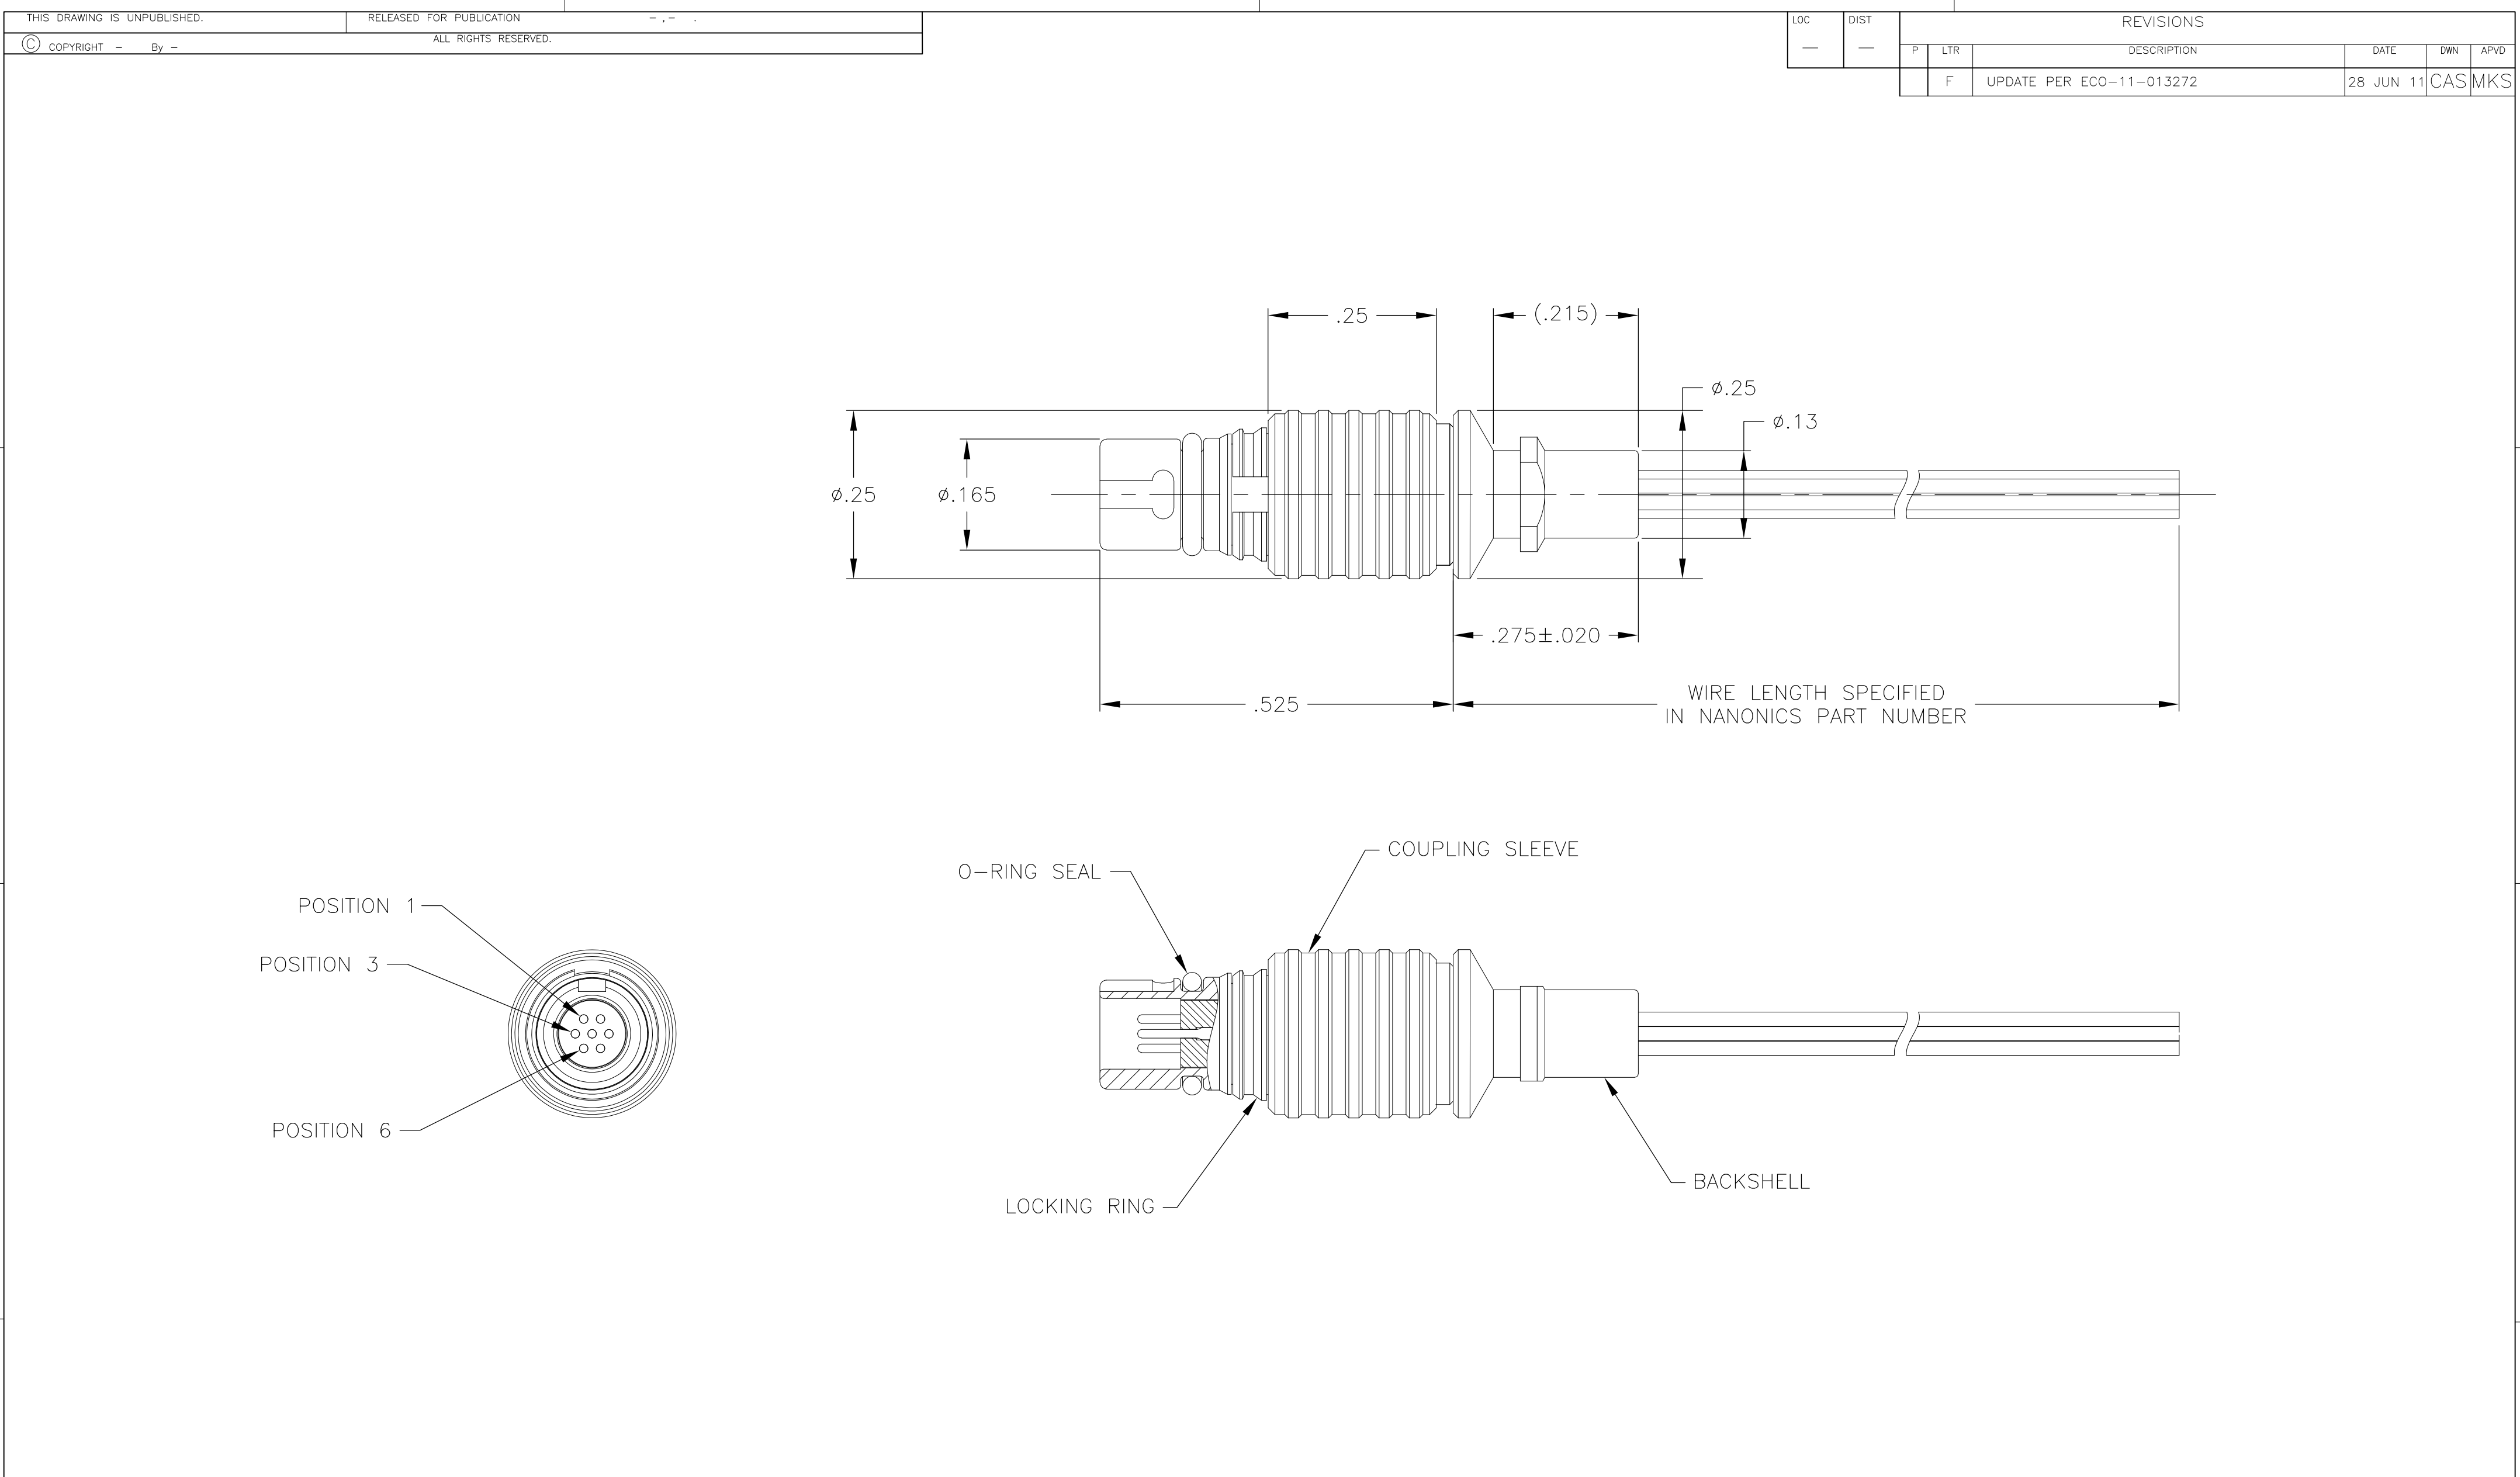

1 CONNECTOR BODY, COUPLING SLEEVE & BACKSHELL MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 BONDING RESISTANCE BETWEEN CONNECTOR BODY AND BACKSHELL TO BE 25 MILLIOHMS MAXIMUM. BACKSHELL TO BE BONDED TO PLUG SHELL WITH CONDUCTIVE EPOXY.

4 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

5 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0087

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	.010
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	1°

MATERIAL

SEE NOTES

FINISH

SEE NOTES

DWN
C. SCHOLL
CHK
M. STORRY
APVD
—
PRODUCT SPEC
—
APPLICATION SPEC
—
WEIGHT
—
CUSTOMER DRAWING

11 JUN 01
13 JUN 01
—
—
—
—
—

NAME
—
PLUG ASSEMBLY,
CIRCULAR, QUICK DISCONNECT,
STRAIGHT BACKSHELL, METAL, 7 POSITION

SIZE
A2

CAGE CODE
0PJN9

DRAWING NO
C=1589691

RESTRICTED TO
—

TE Connectivity

SCALE
6:1

SHEET
1 of 1

REV
F

1471-9 (3/11)

1589691

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QCM007PC2DCC50B](#) [QCM007PC2DC024B](#) [QCM007PC2DC018B](#) [QCM007PC2DC006B](#) [QCM007PC2DC012B](#)
[QCM007PC2DC036B](#)