


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	ALL RIGHTS RESERVED.
© COPYRIGHT -	By -	

LOC	DIST	REVISIONS				APVD
		P	LTR	DESCRIPTION	DATE	
	G	UPDATE PER ECO-11-013056		23 JUN 11	CAS	MKS

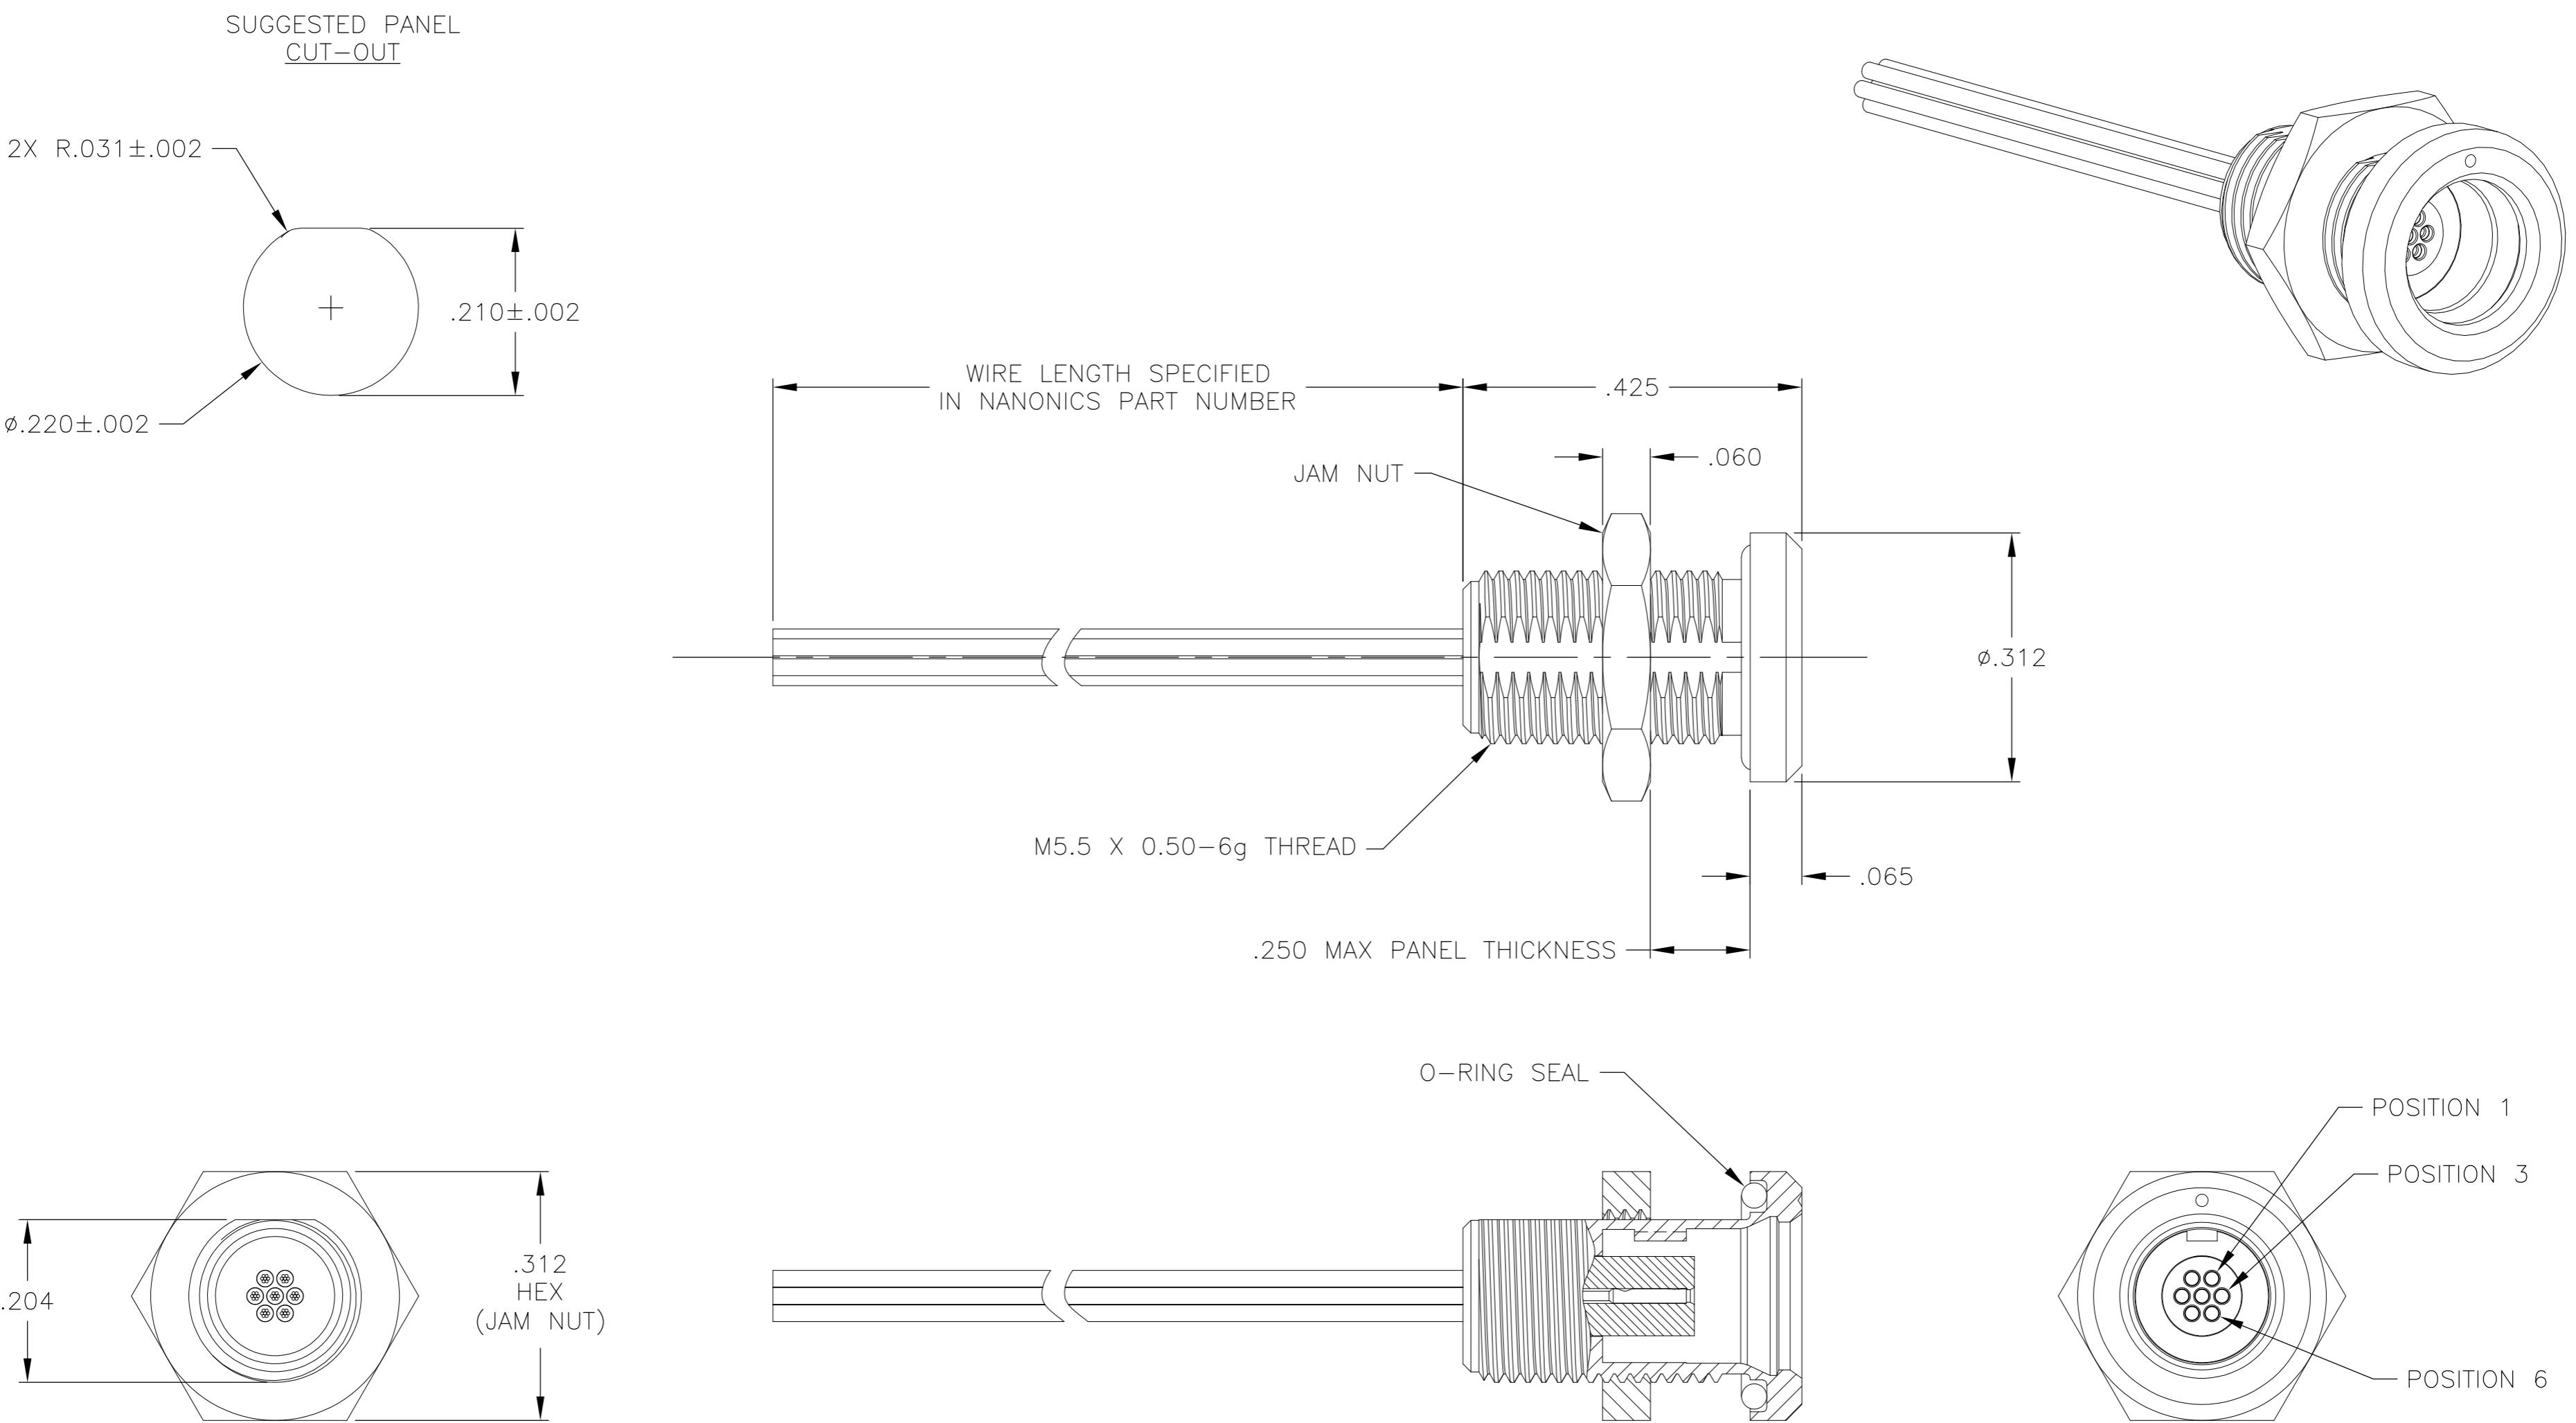

1 CONNECTOR BODY AND JAM NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
 O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0024

THIS DRAWING IS A CONTROLLED DOCUMENT.		4 MAY 99	TE Connectivity
M. STORRY	7 MAY 99	E. PAULUS	
APVD	27 JAN 00	S. KAIN	NAME
PRODUCT SPEC	—	APPLICATION SPEC	RECEPTACLE ASSEMBLY, CIRCULAR, FLUSH MOUNT, QUICK DISCONNECT, METAL, 7 POSITION
MATERIAL	FINISH	WEIGHT	SIZE CAGE CODE DRAWING NO A2 OJPN9 C-1589056
SEE NOTES	SEE NOTES	—	RESTRICTED TO —
CUSTOMER DRAWING		SCALE 6:1	1 OF 1 REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QCM007SC2DCC30F](#)