
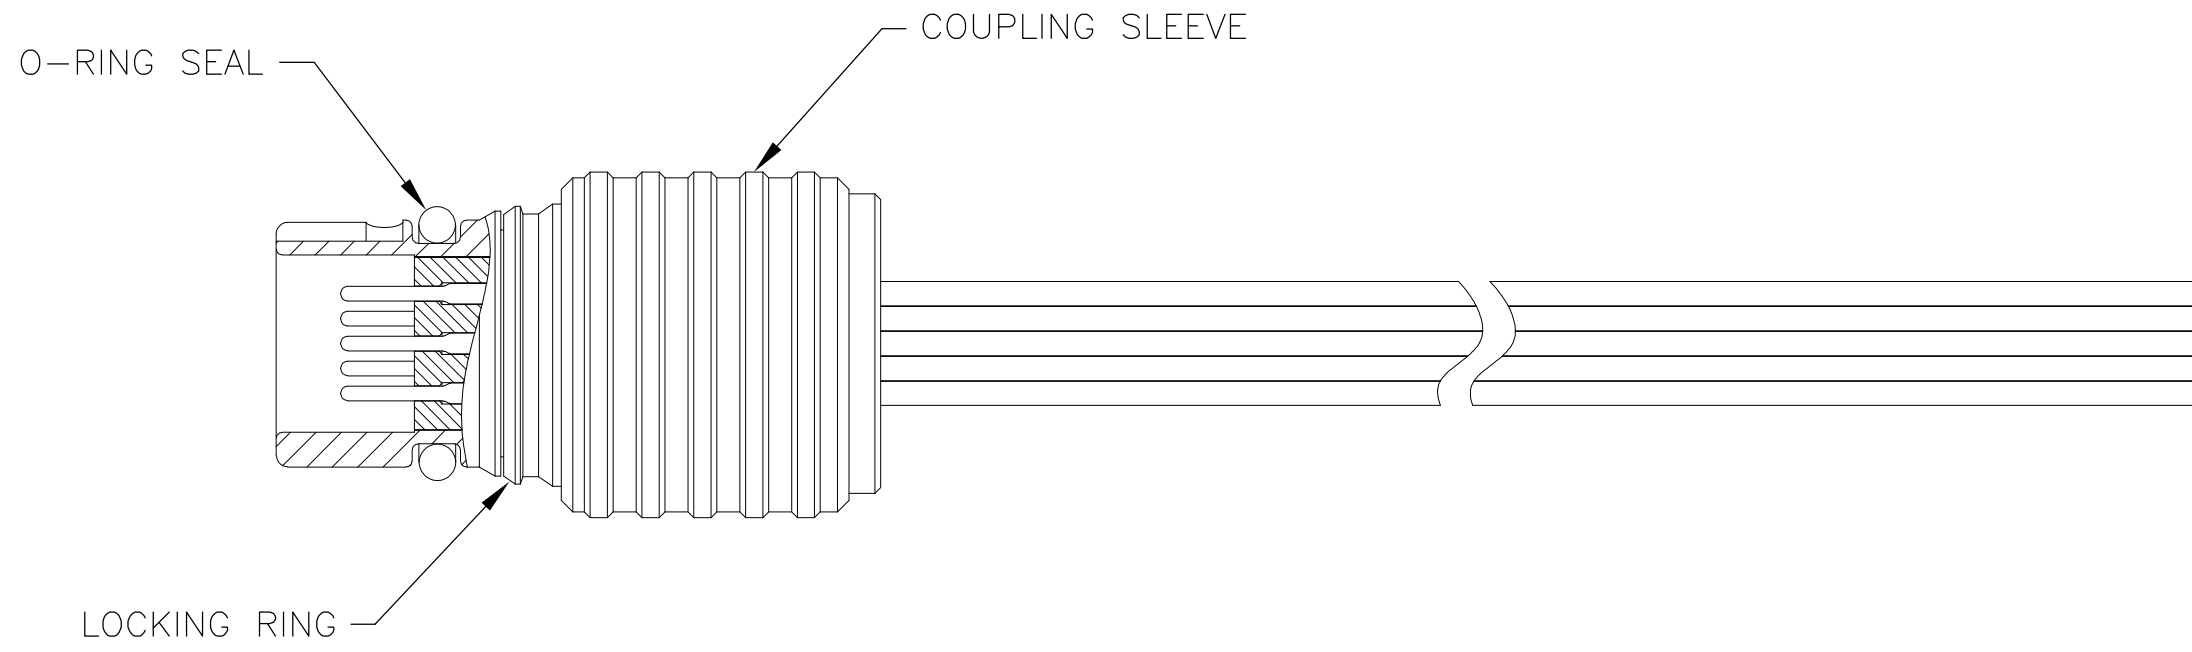
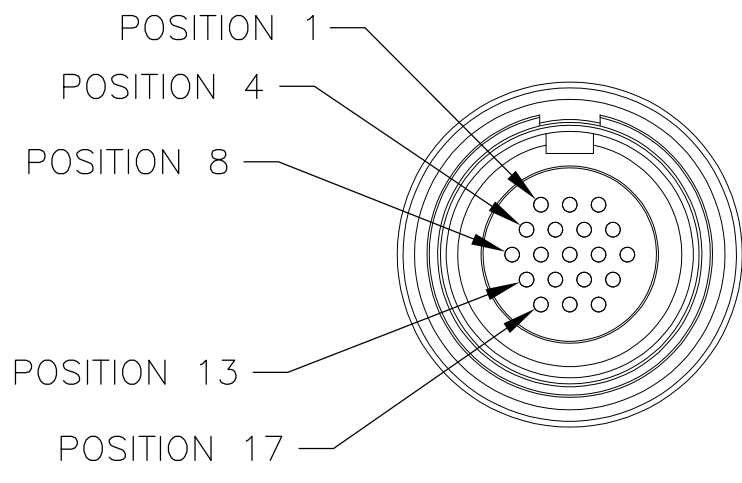
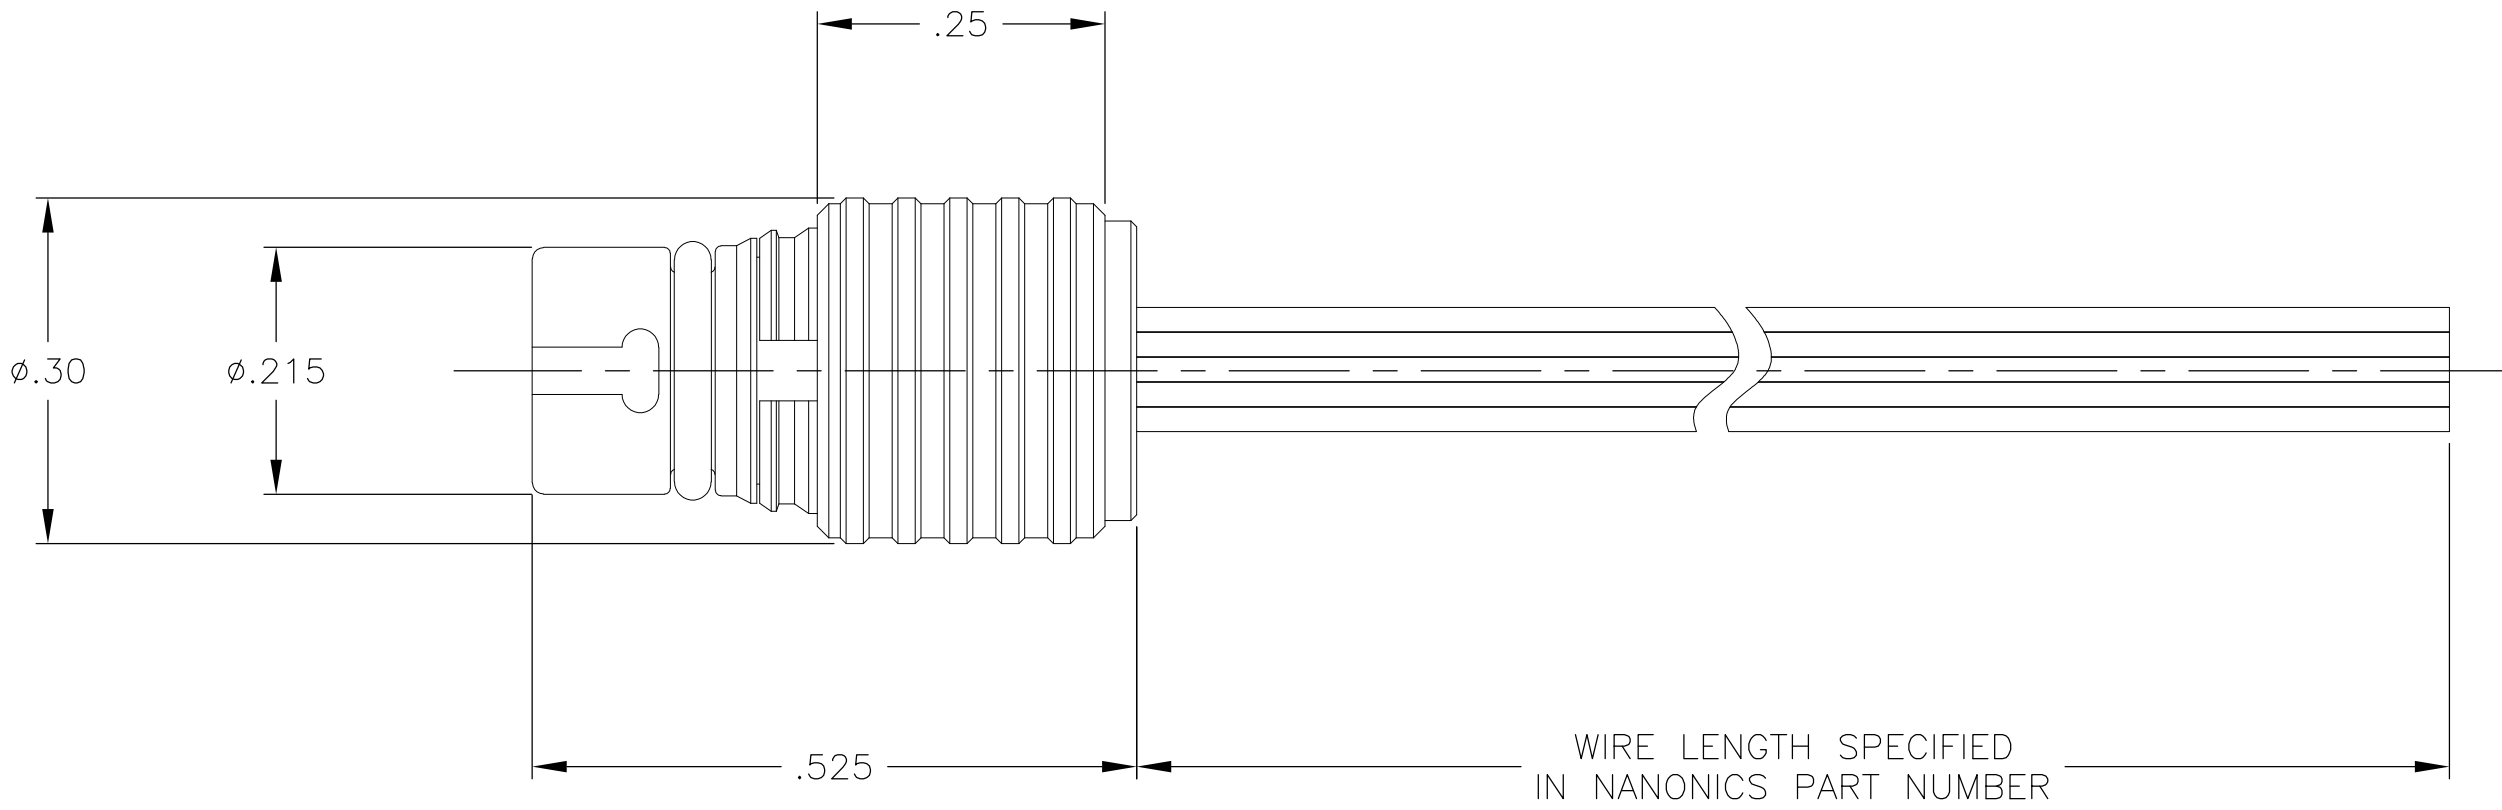


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	UPDATE PER ECO-11-013056	23 JUN 11	CAS	MKS

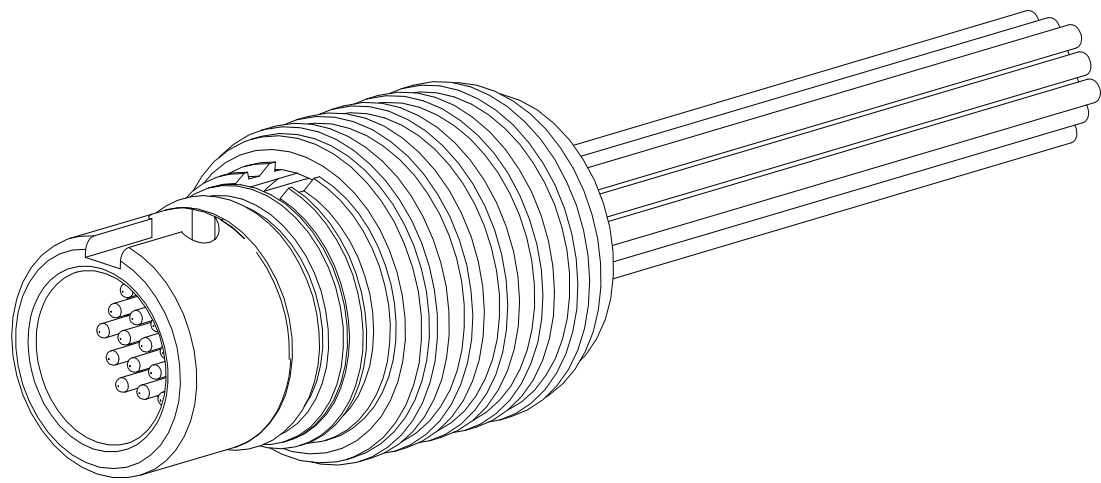

1 CONNECTOR BODY AND COUPLING SLEEVE MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0025

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY 8 APR 99	TE Connectivity	
DIMENSIONS: INCHES		CHK E. PAULUS 8 APR 99		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
	0 PLC ± - 1 PLC ± - 2 PLC ± .010 3 PLC ± .005 4 PLC ± - ANGLES ± 1°		APVD S. KAIN 26 JAN 00	
MATERIAL SEE NOTES	FINISH SEE NOTES	PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	SIZE A2	
		CUSTOMER DRAWING	CAGE CODE 0PJN9	DRAWING NO C=1589057
		SCALE 6:1	SHEET 1 of 1	REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QCM019PC2DC006](#) [QCM019PC2DC012](#) [QCM019PC0DC012](#) [QCM019PC2DC003](#) [QCM019PC2DMC150](#)