



**QTLP600C-23** HER/Yellow

**QTLP600C-24** HER/Green

**QTLP600C-34** Yellow/Green

**QTLP600C-74** AlGaAs Red/Green

### PACKAGE DIMENSIONS

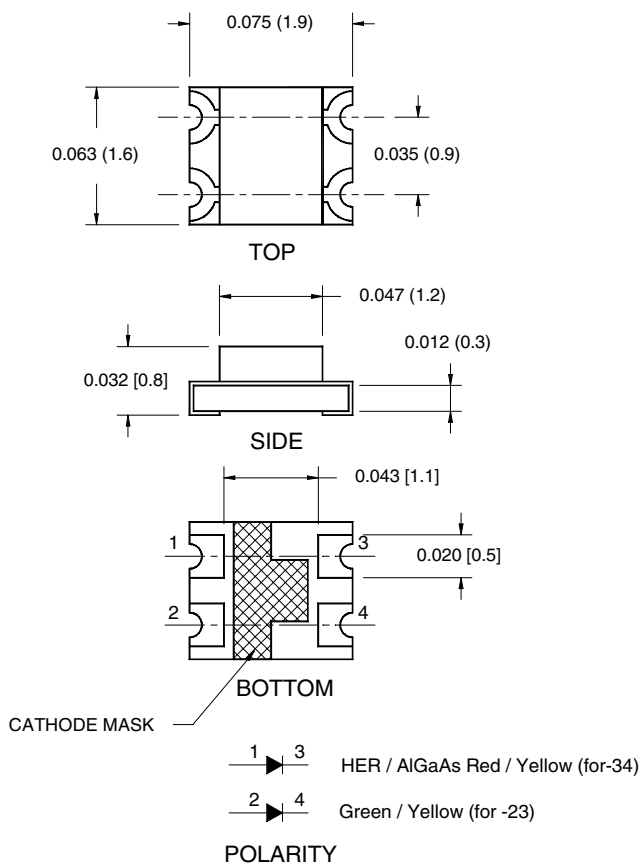

#### NOTE:

Dimensions for all drawings are in inches (mm).

### APPLICATIONS

- Keypad backlighting
- Push-button backlighting
- LCD backlighting

### DESCRIPTION

These bi-color surface mount chip LEDs are designed to fit industry standard footprint. Small size, low profile and wide viewing angle make these LEDs ideal for backlighting applications and panel illumination.

### FEATURES

- Miniature footprint - 1.9(L) X 1.6(W) X 0.8(H) mm
- Wide viewing angle of 130°
- Water clear optics
- Moisture-proof packaging
- Available in 0.315" (8mm) width tape on 7" (178mm) diameter reel; 2,000 units per reel

**QTLP600C-23** HER/Yellow

**QTLP600C-24** HER/Green

**QTLP600C-34** Yellow/Green

**QTLP600C-74** AlGaAs Red/Green

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C Unless otherwise specified)

| Parameter                                                 | Symbol           | QTLP600C      |           |           |           | Units |
|-----------------------------------------------------------|------------------|---------------|-----------|-----------|-----------|-------|
|                                                           |                  | -23           | -24       | -34       | -74       |       |
| Continuous Forward Current                                | I <sub>F</sub>   | 30 / 30       | 30 / 30   | 30 / 30   | 30 / 30   | mA    |
| Peak Forward Current<br>(f = 1.0 KHz, Duty Factor = 1/10) | I <sub>FM</sub>  | 160 / 160     | 160 / 160 | 160 / 160 | 180 / 160 | mA    |
| Reverse Voltage                                           | V <sub>R</sub>   | 5             | 5         | 5         | 5         | V     |
| Power Dissipation                                         | P <sub>D</sub>   | 84 / 84       | 84 / 84   | 84 / 84   | 72 / 84   | mW    |
| Operating Temperature                                     | T <sub>OPR</sub> | -40 to +85    |           |           |           | °C    |
| Storage Temperature                                       | T <sub>STG</sub> | -40 to +90    |           |           |           | °C    |
| Lead Soldering Time                                       | T <sub>SOL</sub> | 260 for 5 sec |           |           |           | °C    |

### ELECTRICAL / OPTICAL CHARACTERISTICS (T<sub>A</sub> = 25°C)

| Parameter                     | Symbol            | QTLP600C  |           |           |           | Units                 |
|-------------------------------|-------------------|-----------|-----------|-----------|-----------|-----------------------|
|                               |                   | -23       | -24       | -34       | -74       |                       |
| Luminous Intensity (mcd)      | I <sub>V</sub>    | 4 / 2.5   | 4 / 7.5   | 2.5 / 7.5 | 10 / 7.5  | I <sub>F</sub> = 20mA |
| Minimum                       |                   | 7 / 4     | 7 / 12.5  | 4 / 12.5  | 20 / 12.5 |                       |
| Forward Voltage (V)           | V <sub>F</sub>    | 2.8 / 2.8 | 2.8 / 2.8 | 2.8 / 2.8 | 2.4 / 2.8 | I <sub>F</sub> = 20mA |
| Maximum                       |                   | 2.0 / 2.0 | 2.0 / 2.1 | 2.0 / 2.1 | 1.9 / 2.1 |                       |
| Wavelength (nm)               | λ <sub>P</sub>    | 635 / 585 | 635 / 565 | 585 / 565 | 660 / 565 | I <sub>F</sub> = 20mA |
| Peak                          |                   | 630 / 590 | 630 / 570 | 590 / 570 | 645 / 570 |                       |
| Dominant                      | λ <sub>D</sub>    |           |           |           |           |                       |
| Spectral Line Half Width (nm) | Δλ                | 45 / 35   | 45 / 30   | 35 / 30   | 20 / 30   | I <sub>F</sub> = 20mA |
| Viewing Angle (°)             | 2θ <sub>1/2</sub> | 130       | 130       | 130       | 130       | I <sub>F</sub> = 20mA |

QTLP600C-23 HER/Yellow

QTLP600C-24 HER/Green

QTLP600C-34 Yellow/Green

QTLP600C-74 AlGaAs Red/Green

### TYPICAL PERFORMANCE CURVES

Fig. 1 Forward Current vs. Forward Voltage

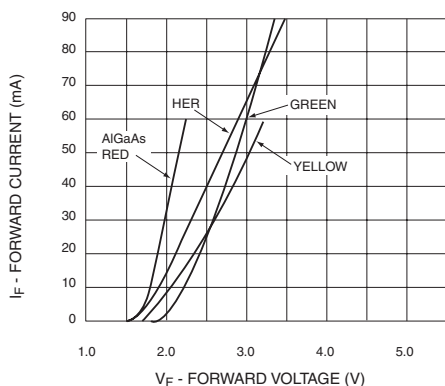


Fig. 2 Relative Luminous Intensity vs. DC Forward Current

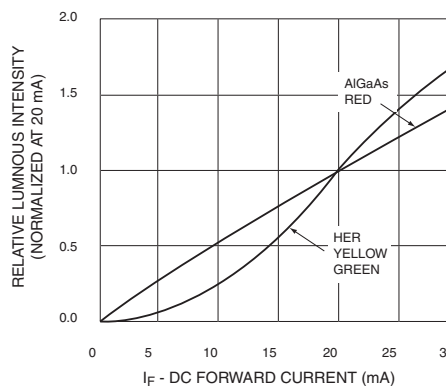


Fig. 3 Relative Intensity vs. Peak Wavelength

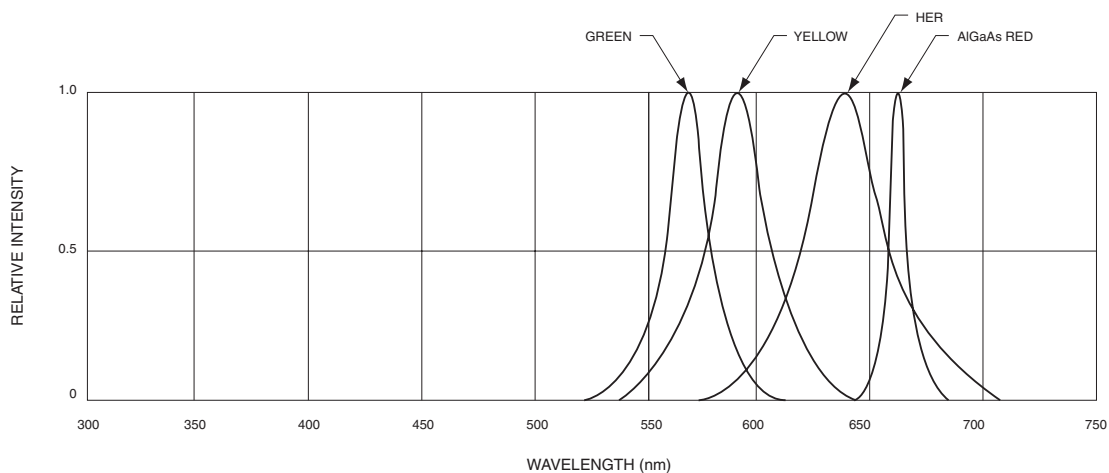


Fig.4 Radiation Diagram


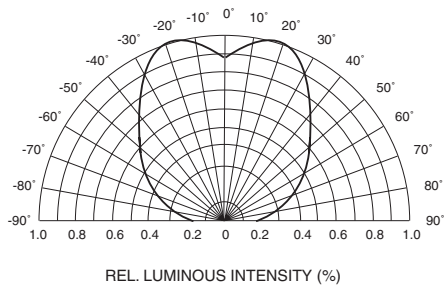


Fig.5 Maximum Forward Current vs. Ambient Temperature

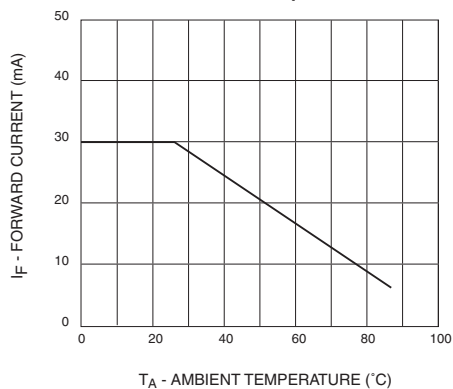


QTLP600C-23 HER/Yellow

QTLP600C-24 HER/Green


QTLP600C-34 Yellow/Green

QTLP600C-74 AlGaAs Red/Green

### RECOMMENDED PRINTED CIRCUIT BOARD PATTERN

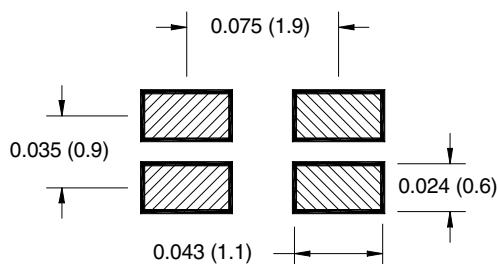

### RECOMMENDED IR REFLOW SOLDERING PROFILE

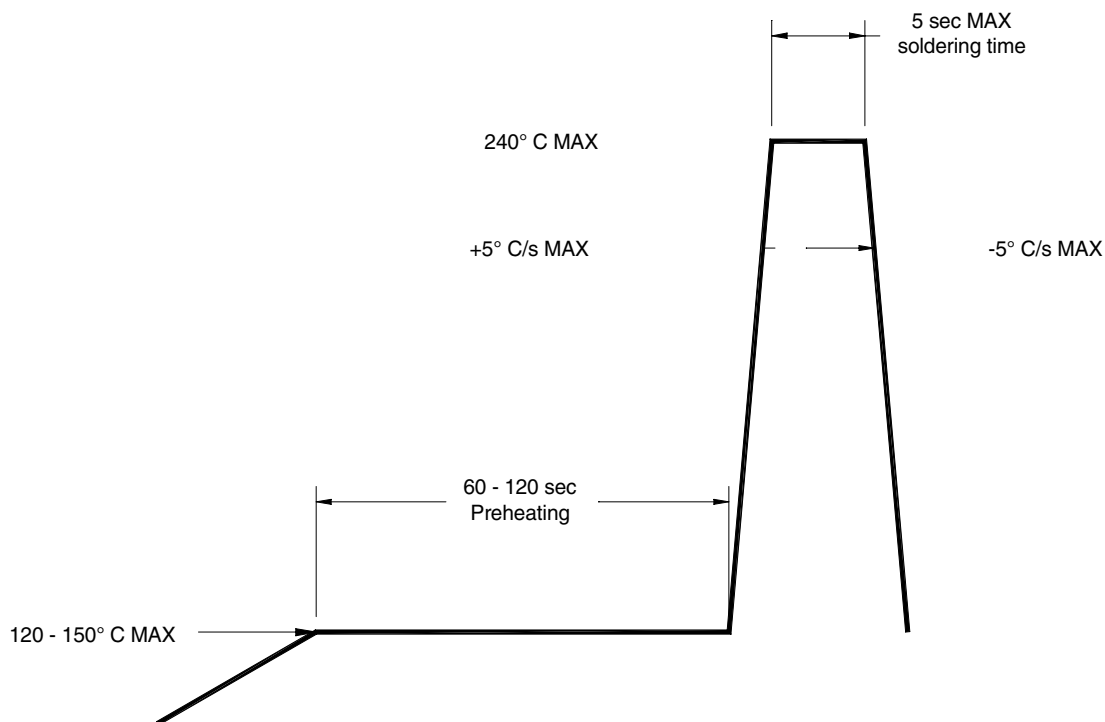



## QTLP600C-23 HER/Yellow

## QTLP600C-24 HER/Green

## QTLP600C-34 Yellow/Green

## QTL P600C-74 AlGaAs Red/Green

## TAPE AND REEL DIMENSIONS

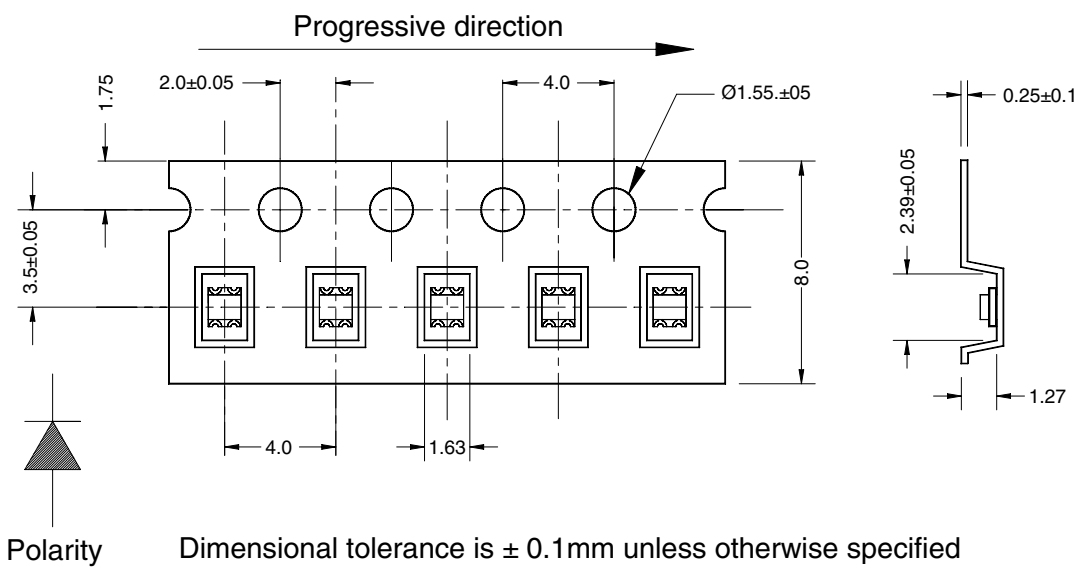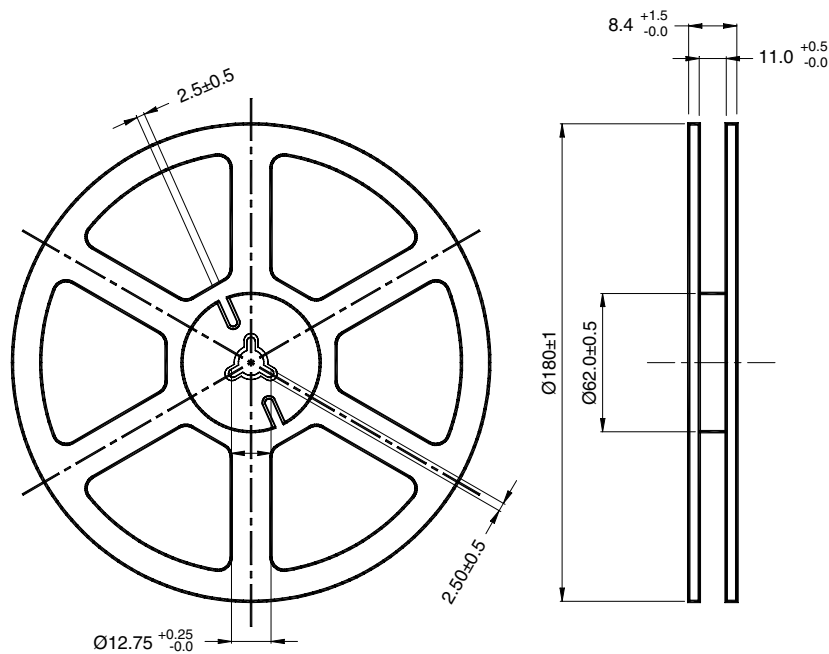

Dimensional tolerance is  $\pm 0.1\text{mm}$  unless otherwise specified

Angle:  $\pm 0.5$

Unit: mm

---

**QTLP600C-23** HER/Yellow

**QTLP600C-24** HER/Green

**QTLP600C-34** Yellow/Green

**QTLP600C-74** AlGaAs Red/Green

---

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Everlight:

[QTL P600C34TR](#) [QTL P600C24TR](#) [QTL P600C74TR](#)