


- Lower mating/unmating force (from 2.5 N to 6N).
- Receptacles intermateable with SMB connectors.
- Gold finish.

recommended for PCB

The SMB-A connectors have the same electrical characteristics as standard SMB connectors.

STRAIGHT RECEPTACLE (FEMALE CENTER CONTACT)

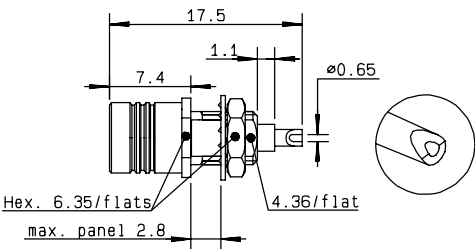

part number	captive center contact	panel	finish
R115 556 000	yes	P01	Gold

STRAIGHT PCB RECEPTACLES (FEMALE CENTER CONTACT)

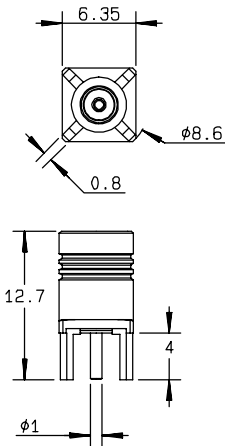


Fig. 1

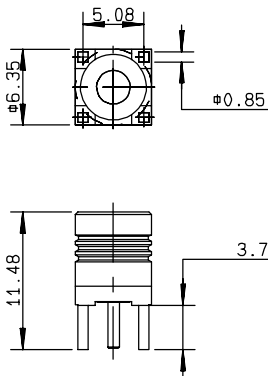


Fig. 2

part number	fig.	captive center contact	PCB	finish	note
R115 427 000	1	yes	P06	Gold	
R115 427 830●	2	yes	P06	Gold	packaging 75

• upon request

standard packaging: unit

