

200 mA 36 V Input Ultra Low Supply Current VR

NO.EA-332-160720

OUTLINE

The R1524x is a CMOS-based ultra low supply current voltage regulator featuring 200 mA output current and 36 V input voltage. This device consists of an Output Short-circuit Protection Circuit, an Over-current Protection Circuit, and a Thermal Shutdown Circuit in addition to the basic regulator circuits. The operating temperature range is from -40°C to 105°C , and the maximum input voltage is 36 V. All these features allow the R1524x to become an ideal power source of electric home appliances.

The output voltages are internally fixed at either of the following: 1.8 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V, 3.4 V, 5.0 V, 6.0 V, 8.0 V, 8.5 V and 9.0 V. The output voltage accuracy is $\pm 0.6\%$.

The packages for this device range from high-density mounting to ultra high wattage. The R1524x is offered in a 5-pin SOT-23-5, a 5-pin SOT-89-5, a 6-pin HSOP-6J, and a 6-pin DFN(PLP)1820-6 package.

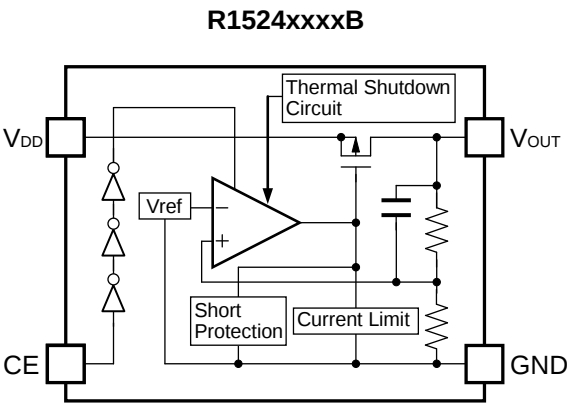
FEATURES

- Input Voltage Range (Maximum Rating) 3.5 V to 36 V (50 V)
- Operating Temperature Range -40°C to 105°C
- Supply Current Typ. 2.2 μA
- Standby Current Typ. 0.1 μA
- Dropout Voltage Typ. 0.6 V ($I_{\text{OUT}} = 200 \text{ mA}$, $V_{\text{OUT}} = 5.0 \text{ V}$)
- Output Voltage Range 1.8 V / 2.5 V / 2.8 V / 3.0 V / 3.3 V / 3.4 V /
5.0 V / 6.0 V / 8.0 V / 8.5 V / 9.0 V
*Contact Ricoh sales representatives for other voltages.
- Output Voltage Accuracy $\pm 0.6\%$ ($T_a = 25^{\circ}\text{C}$)
- Output Voltage Temperature-Drift Coefficient Typ. $\pm 60 \text{ ppm}/^{\circ}\text{C}$
- Line Regulation Typ. 0.01%/V ($V_{\text{SET}} + 1 \text{ V} \leq V_{\text{IN}} \leq 36 \text{ V}$)
- Built-in Output Short-circuit Protection Circuit Typ. 80 mA
- Built-in Over-current Protection Circuit Typ. 350 mA
- Built-in Thermal Shutdown Circuit Thermal Shutdown Temperature: Typ. 160°C
- Ceramic capacitors are recommended
to be used with this device $C_{\text{OUT}} = 0.1 \mu\text{F}$ or more
- Packages SOT-23-5, SOT-89-5, HSOP-6J, DFN(PLP)1820-6

APPLICATIONS

- Power source for home appliances such as refrigerators, rice cookers, and electric hot-water pot.
- Power source for notebook PCs, digital TVs, cordless phones, and private LAN system.
- Power source for office equipment machines such as copiers, printers, facsimiles, scanners, and projectors.

BLOCK DIAGRAM




SELECTION GUIDE


The set output voltage and the package type are user-selectable.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R1524NxxxB-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes
R1524HxxxB-T1-FE	SOT-89-5	1,000 pcs	Yes	Yes
R1524SxxxB-E2-FE	HSOP-6J	1,000 pcs	Yes	Yes
R1524KxxxB-TR	DFN(PLP)1820-6	5,000 pcs	Yes	Yes
xxx: Specify the set output voltage (V _{SET}) 1.8 V (018) / 2.5 V (025) / 2.8 V (028) / 3.0 V (030) / 3.3 V (033) / 3.4 V (034) / 5.0 V (050) / 6.0 V (060) / 8.0 V (080) / 8.5 V (085) / 9.0 V (090) *Contact Ricoh sales representatives for other voltages.				


PIN DESCRIPTIONS



SOT-23-5




SOT-89-5




HSOP-6J

Top View



Bottom View



DFN(PLP)1820-6

SOT-23-5

Pin No.	Symbol	Description
1	GND ^{*1}	Ground Pin
2	GND ^{*1}	Ground Pin
3	CE	Chip Enable Pin (Active-high)
4	V _{OUT}	Output Pin
5	V _{DD}	Input Pin

^{*1} The GND pin must be wired together when it is mounted on board.

SOT-89-5

Pin No.	Symbol	Description
1	V _{OUT}	Output Pin
2	GND ^{*2}	Ground Pin
3	CE	Chip Enable Pin (Active-high)
4	GND ^{*2}	Ground Pin
5	V _{DD}	Input Pin

^{*2} The GND pin must be wired together when it is mounted on board.

R1524xNO.EA-332-160720

HSOP-6J

Pin No.	Symbol	Description
1	V _{OUT}	Output Pin
2	GND ^{*3}	Ground Pin
3	CE	Chip Enable Pin (Active-high)
4	GND ^{*3}	Ground Pin
5	GND ^{*3}	Ground Pin
6	V _{DD}	Input Pin


^{*3} The GND pin must be wired together when it is mounted on board.

DFN(PLP)1820-6


Pin No.	Symbol	Description
1	CE	Chip Enable Pin (Active-high)
2	NC	No Connection
3	GND	Ground Pin
4	V _{DD}	Input Pin
5	NC	No Connection
6	V _{OUT}	Output Pin

^{*4} The tab on the bottom of the package enhances thermal performance and is electrically connected to GND (substrate level). It is recommended that the tab be connected to the ground plane on the board, or otherwise be left open.

PIN EQUIVALENT CIRCUIT DIAGRAMS



V_{OUT} Pin



CE Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item			Rating	Unit
V _{IN}	Input Voltage			−0.3 to 50	V
V _{IN}	Peak Input Voltage* ¹			60	V
V _{CE}	Input Voltage (CE Pin)			−0.3 to 50	V
V _{OUT}	Output Voltage			−0.3 to V _{IN} + 0.3 ≤ 50	V
I _{OUT}	Output Current			300	mA
P _D	Power Dissipation* ²	SOT-23-5	Standard Land Pattern	420	mW
		SOT-89-5	Standard Land Pattern	900	
			High Wattage Land Pattern	1300	
		HSOP-6J	Standard Land Pattern	1700	
			Ultra High Wattage Land Pattern	2700	
		DFN(PLP)1820-6	Standard Land Pattern	880	
T _a	Operating Temperature Range			−40 to 105	°C
T _{stg}	Storage Temperature Range			−55 to 125	°C

^{*1} Duration time: 200 ms

^{*2} Refer to *PACKAGE INFORMATION* for detailed information.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the lifetime and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings are not assured.

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

R1524x

NO.EA-332-160720

ELECTRICAL CHARACTERISTICS $C_{IN} = C_{OUT} = 0.1 \mu F$, unless otherwise noted.The specifications surrounded by are guaranteed by design engineering at $-40^{\circ}\text{C} \leq T_a \leq 105^{\circ}\text{C}$.**R1524xxxxB**

(Ta = 25°C)


Symbol	Item	Conditions		Min.	Typ.	Max.	Unit
I _{SS}	Supply Current	V _{IN} = 14 V I _{OUT} = 0 mA	V _{SET} ≤ 5.0 V		2.2	6.5	μA
			5.0 V < V _{SET}		2.5	6.8	
I _{standby}	Standby Current	V _{IN} = 36 V, V _{CE} = 0 V			0.1	1.0	μA
V _{OUT}	Output Voltage	V _{SET} + 1 V ≤ V _{IN} ≤ 36 V I _{OUT} = 1 mA	T _a = 25°C	×0.994		×1.006	V
			-40°C ≤ T _a ≤ 105°C	×0.984		×1.016	
ΔV _{OUT} / ΔI _{OUT}	Load Regulation	V _{IN} = V _{SET} + 3.0 V 1 mA ≤ I _{OUT} ≤ 200 mA		Refer to the <i>Product-specific Electrical Characteristics</i>			
ΔV _{OUT} / ΔV _{IN}	Line Regulation	V _{SET} + 1 V ≤ V _{IN} ≤ 36 V, I _{OUT} = 1 mA	V _{SET} < 3.3 V	-20	5	20	mV
			3.3 V ≤ V _{SET}	-0.02	0.01	0.02	%/V
V _{DIF}	Dropout Voltage	I _{OUT} = 200 mA		Refer to the <i>Product-specific Electrical Characteristics</i>			
I _{LIM}	Output Current Limit	V _{IN} = V _{SET} + 3.0 V		220	350		mA
I _{SC}	Short Current Limit	V _{OUT} = 0 V		60	80		mA
V _{CEH}	CE Input Voltage “H”			2.0		36	V
V _{CEL}	CE Input Voltage “L”			0		1.0	V
I _{PD}	CE Pull-down Current				0.2	0.6	μA
T _{TSD}	Thermal Shutdown Temperature	Junction Temperature			160		°C
T _{TSR}	Thermal Shutdown Released Temperature	Junction Temperature			135		°C

All test items listed under Electrical Characteristics are done under the pulse load condition (T_J ≈ Ta = 25°C).**R1524xxxxB Product-specific Electrical Characteristics**

(Ta = 25°C)

Product Name	V _{OUT} (V) (Ta = 25°C)			V _{OUT} (V) (-40°C ≤ Ta ≤ 105°C)			ΔV _{OUT} /ΔI _{OUT} (mV)			V _{DIF} (V)	
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	TYP.	MAX.
R1524x018B	1.7892	1.80	1.8108	1.7712	1.80	1.8288	-10	10	40	1.6	2.5
R1524x025B	2.4850	2.50	2.5150	2.4600	2.50	2.5400				1.2	2.2
R1524x028B	2.7832	2.80	2.8168	2.7552	2.80	2.8448				0.8	2.0
R1524x030B	2.9820	3.00	3.0180	2.9520	3.00	3.0480				0.6	1.7
R1524x033B	3.2802	3.30	3.3198	3.2472	3.30	3.3528				0.5	1.3
R1524x034B	3.3796	3.40	3.4204	3.3456	3.40	3.4544					
R1524x050B	4.9700	5.00	5.0300	4.9200	5.00	5.0800	-18	18	72	0.5	1.3
R1524x060B	5.9640	6.00	6.0360	5.9040	6.00	6.0960					
R1524x080B	7.9520	8.00	8.0480	7.8720	8.00	8.1280					
R1524x085B	8.4490	8.50	8.5510	8.3640	8.50	8.6360					
R1524x090B	8.9460	9.00	9.0540	8.8560	9.00	9.1440					

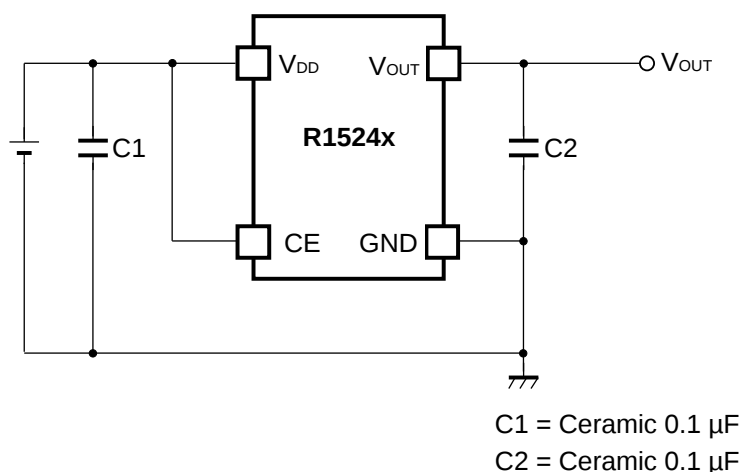TYPICAL APPLICATIONS



R1524x Typical Applications

TECHNICAL NOTES

Phase Compensation

In the R1524x, phase compensation is provided to secure stable operation even when the load current is varied. For this purpose, make sure to use 0.1 μ F or more of a capacitor (C2).

In case of using a tantalum type capacitor and the ESR (Equivalent Series Resistance) value of the capacitor is large, the output might be unstable. Evaluate the circuit including consideration of frequency characteristics.

Connect 0.1 μ F or more of a capacitor (C1) between V_{DD} and GND, and as close as possible to the pins.

PCB Layout

For SOT-23-5 package type, wire the following GND pins together: No. 1 and No. 2

For SOT-89-5 package type, wire the following GND pins together: No. 2 and No. 4.

For HSOP-6J package type, wire the following GND pins together: No. 2, No. 4, and No. 5.

Thermal Shutdown

R1524x has a built-in thermal shutdown circuit, which stops the regulator operation if the junction temperature of this device increases to 160°C (Typ.) or higher. If the temperature drops to 135°C (Typ.) or lower, the regulator restarts the operation. Unless eliminating the overheating problem, the regulator turns on and off repeatedly and as a result, a pulse shaped output voltage is generated.

PACKAGE INFORMATION

POWER DISSIPATION (SOT-23-5)

Power Dissipation (P_D) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:



Measurement Conditions

	Standard Test Land Pattern
Environment	Mounting on Board (Wind velocity = 0 m/s)
Board Material	Glass cloth epoxy plastic (Double sided)
Board Dimensions	40 mm x 40 mm x 1.6 mm
Copper Ratio	Top side: Approx. 50%, Back side: Approx. 50%
Through-holes	ϕ 0.5 mm x 44 pcs

Measurement Result

($T_a = 25^\circ\text{C}$, $T_{j\text{max}} = 125^\circ\text{C}$)

	Standard Test Land Pattern
Power Dissipation	420 mW
Thermal Resistance	$\theta_{ja} = (125 - 25^\circ\text{C})/0.42 \text{ W} = 238^\circ\text{C/W}$

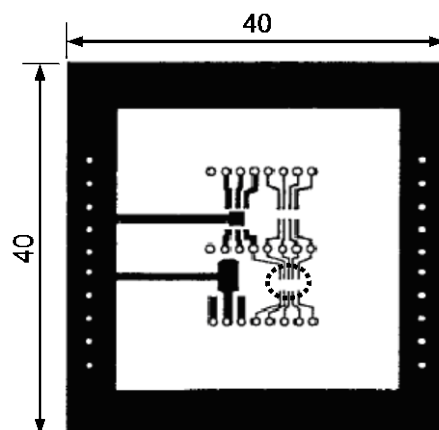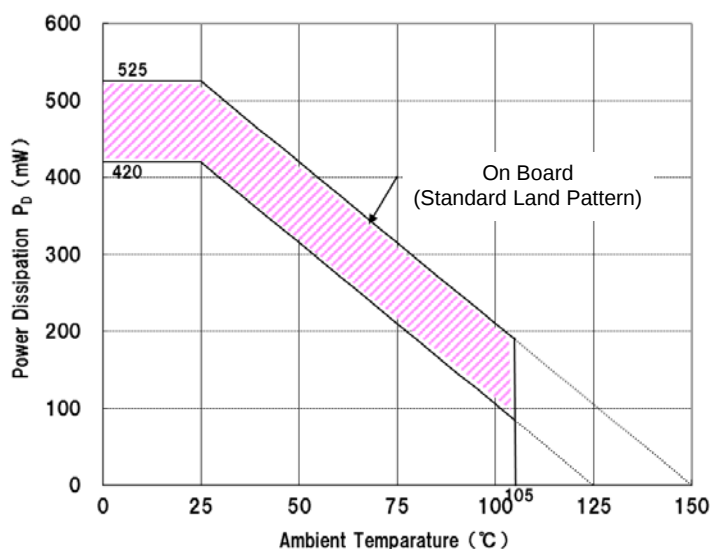

 IC Mount Area (Unit: mm)


Ambient Temperature vs. Power Dissipation

Measurement Board Pattern

The above graph shows the Power Dissipation of the package based on $T_{j\text{max}} = 125^\circ\text{C}$ and $T_{j\text{max}} = 150^\circ\text{C}$. Operating the IC in the shaded area in the graph might have an influence its lifetime. Operating time must be within the time limit described in the table below, in case of operating in the shaded area.

Operating Time	Estimated years (Operating four hours/day)
13,000 hours	9 years

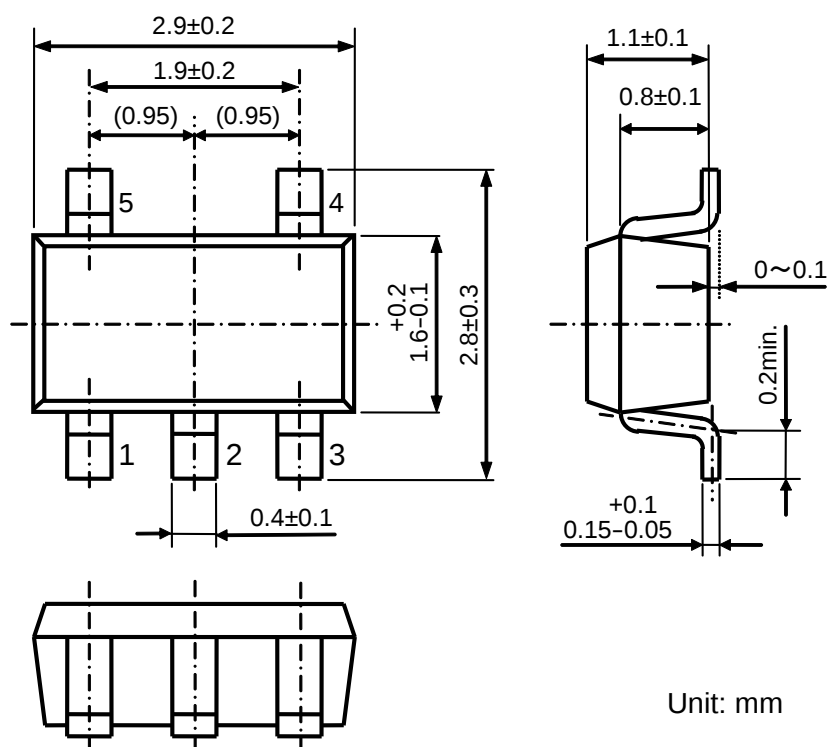PACKAGE DIMENSIONS (SOT-23-5)




SOT-23-5 Package Dimensions

MARK SPECIFICATION (SOT-23-5)

①②③: Product Code ... **Refer to MARK SPECIFICATION TABLE (SOT-23-5)**

④⑤: Lot Number ... Alphanumeric Serial Number



SOT-23-5 Mark Specification

R1524xNO.EA-332-160720

MARK SPECIFICATION TABLE (SOT-23-5)**R1524NxxxB**

Product Name	①	②	③	V _{SET}
R1524N018B	C	T	7	1.8 V
R1524N025B	C	T	8	2.5 V
R1524N028B	C	T	9	2.8 V
R1524N030B	C	S	0	3.0 V
R1524N033B	C	T	0	3.3 V
R1524N034B	C	T	1	3.4 V
R1524N050B	C	T	2	5.0 V
R1524N060B	C	T	3	6.0 V
R1524N080B	C	T	4	8.0 V
R1524N085B	C	T	5	8.5 V
R1524N090B	C	T	6	9.0 V

POWER DISSIPATION (SOT-89-5)

Power Dissipation (P_D) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:



Measurement Conditions

	High Wattage Land Pattern	Standard Land Pattern
Environment	Mounting on Board (Wind velocity = 0 m/s)	Mounting on Board (Wind velocity = 0 m/s)
Board Material	Glass cloth epoxy plastic (Double sided)	Glass cloth epoxy plastic (Double sided)
Board Dimensions	30 mm × 30 mm × 1.6 mm	50 mm × 50 mm × 1.6 mm
Copper Ratio	Top side : Approx. 20% , Back side : Approx. 100%	Top side : Approx. 10% , Back side : Approx. 100%
Through-hole	φ0.85 mm × 10 pcs	-

Measurement Result

(Ta = 25°C, Tjmax = 125°C)

	High Wattage Land Pattern	Standard Land Pattern
Power Dissipation	1300 mW	900 mW
Thermal Resistance	77°C/W	111°C /W

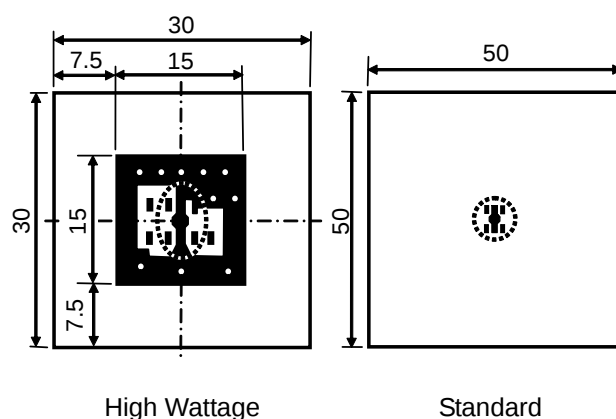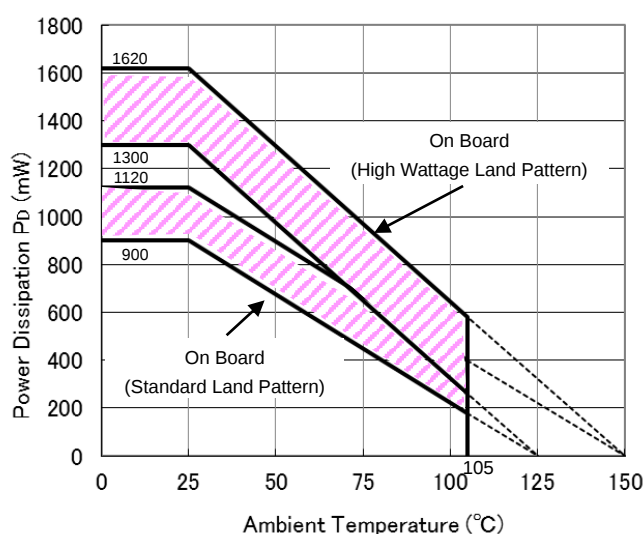


 IC Mount Area (Unit: mm)

Power Dissipation vs. Ambient Temperature**Measurement Board Pattern**

The above graph shows the Power Dissipation of the package based on Tjmax = 125°C and Tjmax = 150°C. Operating the IC in the shaded area in the graph might have an influence its lifetime. Operating time must be within the time limit described in the table below, in case of operating in the shaded area.

Operating Time	Estimated years (Operating four hours/day)
13,000 hours	9 years

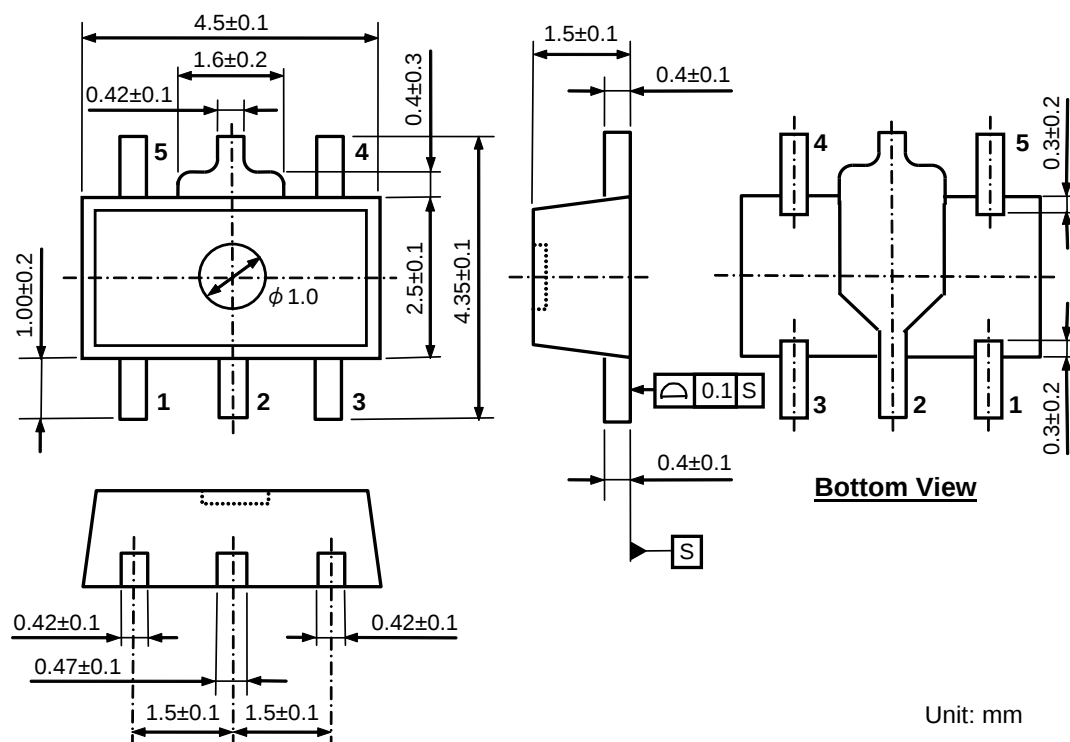PACKAGE DIMENSIONS (SOT-89-5)




SOT-89-5 Package Dimensions

MARK SPECIFICATION (SOT-89-5)

①②③④: Product Code ... Refer to MARK SPECIFICATION TABLE (SOT-89-5)

⑤⑥: Lot Number ... Alphanumeric Serial Number



SOT-89-5 Mark Specification

MARK SPECIFICATION TABLE (SOT-89-5)

R1524HxxxB

Product Name	①	②	③	④	V _{SET}
R1524H018B	J	1	8	B	1.8 V
R1524H025B	J	2	5	B	2.5 V
R1524H028B	J	2	8	B	2.8 V
R1524H030B	J	3	0	B	3.0 V
R1524H033B	J	3	3	B	3.3 V
R1524H034B	J	3	4	B	3.4 V
R1524H050B	J	5	0	B	5.0 V
R1524H060B	J	6	0	B	6.0 V
R1524H080B	J	8	0	B	8.0 V
R1524H085B	J	8	5	B	8.5 V
R1524H090B	J	9	0	B	9.0 V

POWER DISSIPATION (HSOP-6J)

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement.



Measurement Conditions

	Ultra-high Wattage Land Pattern	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity = 0 m/s)	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-layer Board)	Glass Cloth Epoxy Plastic (Double-sided Board)
Board Dimensions	76.2 mm × 114.3 mm × 0.8 mm	50 mm × 50 mm × 1.6 mm
Copper Ratio	96%	50%
Through-holes	φ 0.3 mm × 28 pcs	φ 0.5 mm × 24 pcs


Measurement Result

(Ta = 25°C, Tjmax = 125°C)

	Ultra-high Wattage Land Pattern	Standard Land Pattern	Free Air
Power Dissipation	2700 mW	1700 mW	540 mW
Thermal Resistance	37°C/W	59°C/W	185°C/W

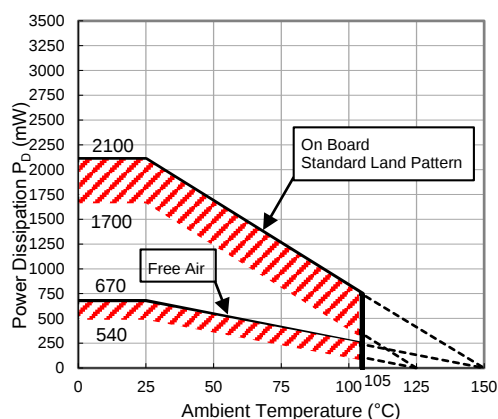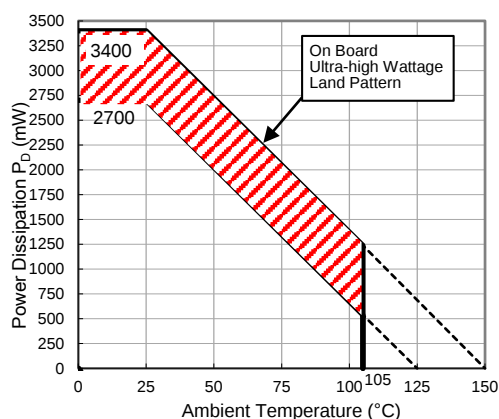

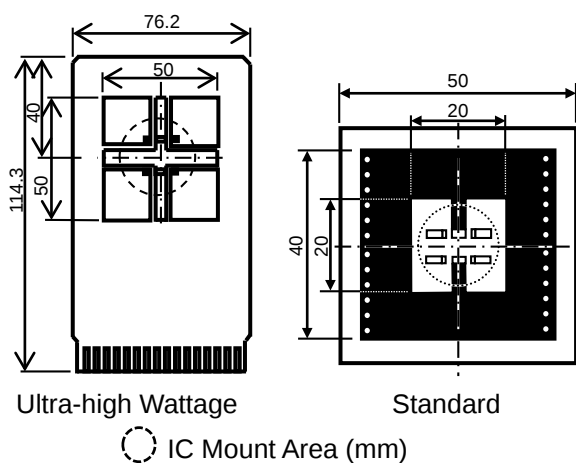Power Dissipation vs. Ambient Temperature




Measurement Board Pattern

The above graph shows the power dissipation of the package at Tjmax = 125°C and Tjmax = 150°C. Operating the device in the hatched range might have a negative influence on its lifetime. The total hours of use and the total years of use must be limited as follows:

Total Hours of Use	Total Years of Use (4 hours/day)
13,000 hours	9 years

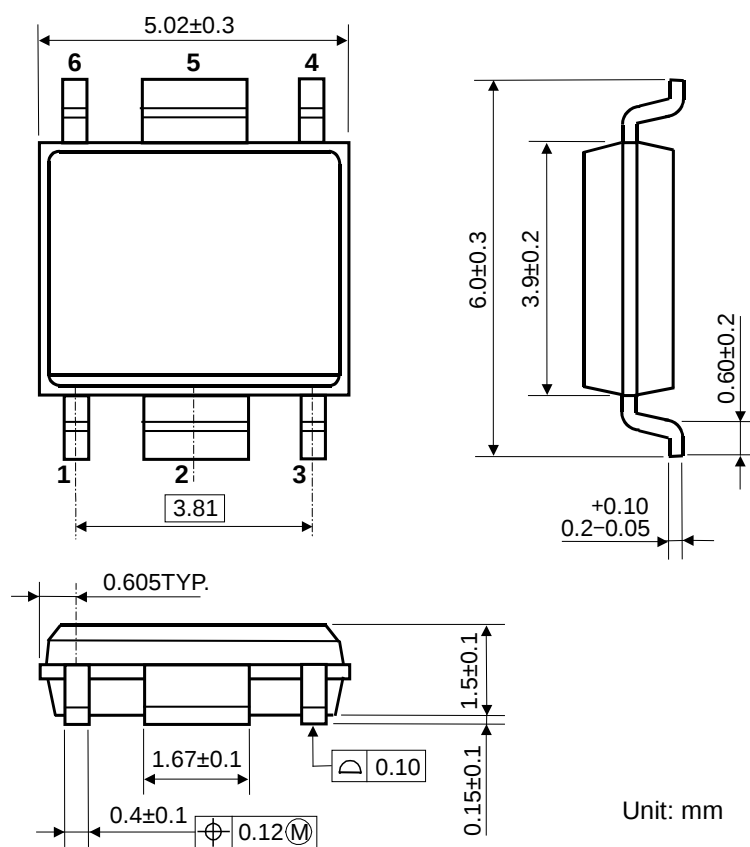PACKAGE DIMENSIONS (HSOP-6J)




HSOP-6J Package Dimensions

MARK SPECIFICATION (HSOP-6J)

①②③④: Product Code ... **Refer to MARK SPECIFICATION TABLE (HSOP-6J)**

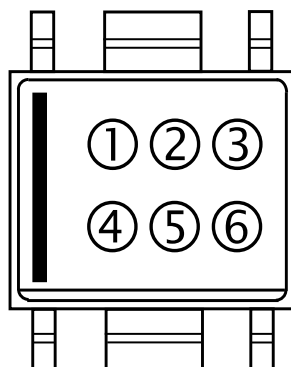⑤⑥: Lot Number ... Alphanumeric Serial Number



HSOP-6J Mark Specification

R1524xNO.EA-332-160720

MARK SPECIFICATION TABLE (HSOP-6J)**R1524SxxxB**

Product Name	①	②	③	④	V _{SET}
R1524S018B	A	1	8	B	1.8 V
R1524S025B	A	2	5	B	2.5 V
R1524S028B	A	2	8	B	2.8 V
R1524S030B	A	3	0	B	3.0 V
R1524S033B	A	3	3	B	3.3 V
R1524S034B	A	3	4	B	3.4 V
R1524S050B	A	5	0	B	5.0 V
R1524S060B	A	6	0	B	6.0 V
R1524S080B	A	8	0	B	8.0 V
R1524S085B	A	8	5	B	8.5 V
R1524S090B	A	9	0	B	9.0 V

POWER DISSIPATION (DFN(PLP)1820-6)

Power Dissipation (P_D) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:



Measurement Conditions

	Standard Land Pattern
Environment	Mounting on Board (Wind velocity = 0 m/s)
Board Material	Glass cloth epoxy plastic (Double sided)
Board Dimensions	40 mm x 40 mm x 1.6 mm
Copper Ratio	Top side: Approx. 50%, Back side: Approx. 50%
Through-hole	ϕ 0.54mm x 30 pcs

Measurement Result

(Ta = 25°C, Tjmax = 125°C)

	Standard Land Pattern
Power Dissipation	880 mW
Thermal Resistance	$\theta_{ja} = (125-25^\circ\text{C}) / 0.88 \text{ W} = 114^\circ\text{C/W}$

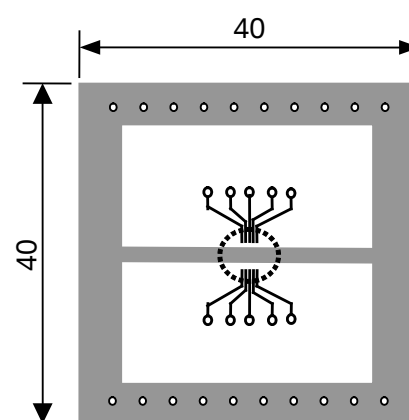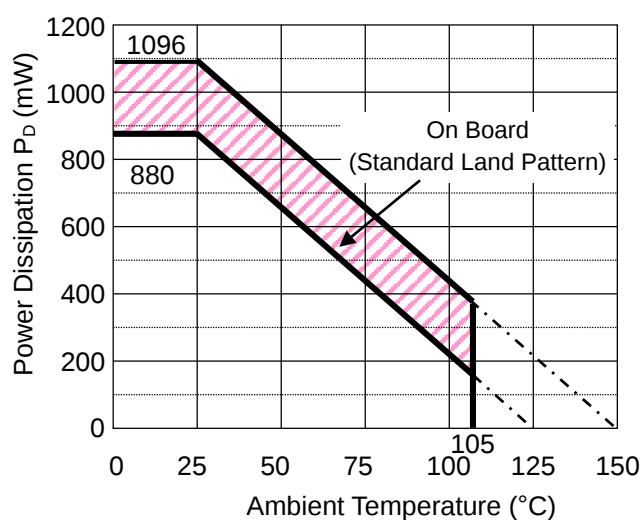


 IC Mount Area (Unit: mm)

Power Dissipation vs. Ambient Temperature**Measurement Board Pattern**

The above graph shows the Power Dissipation of the package based on $T_{jmax} = 125^\circ\text{C}$ and $T_{jmax} = 150^\circ\text{C}$. Operating the IC in the shaded area in the graph might have an influence its lifetime. Operating time must be within the time limit described in the table below, in case of operating in the shaded area.

Operating Time	Estimated years (Operating four hours/day)
13,000 hours	9 years

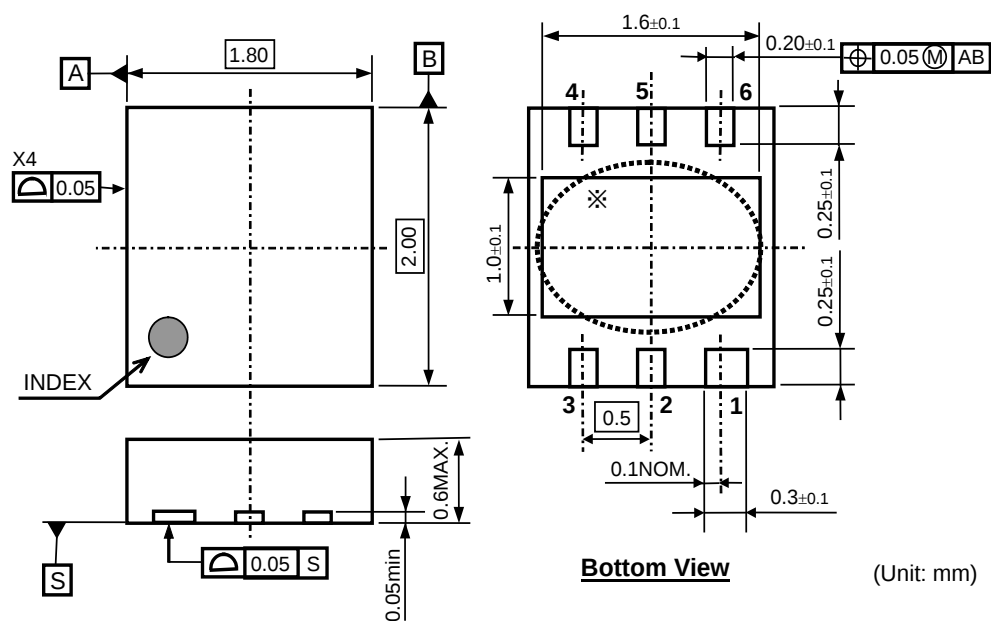PACKAGE DIMENSIONS (DFN(PLP)1820-6)




※) The tab on the bottom of the package enhances thermal performance and is electrically connected to GND (substrate level). It is recommended that the tab be connected to the ground plane on the board, or otherwise be left open.

DFN(PLP)1820-6 Package Dimensions

MARK SPECIFICATION (DFN(PLP)1820-6)

①②③④: Product Code ... Refer to MARK SPECIFICATION TABLE (DFN(PLP)1820-6)

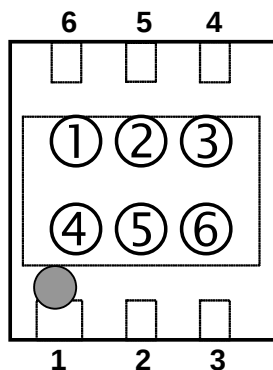⑤⑥: Lot Number ... Alphanumeric Serial Number



DFN(PLP)1820-6 Mark Specification

MARK SPECIFICATION TABLE (DFN(PLP)1820-6)





R1524KxxxB

Product Name	①	②	③	④	V _{SET}
R1524K018B	F	A	1	8	1.8 V
R1524K025B	F	A	2	5	2.5 V
R1524K028B	F	A	2	8	2.8 V
R1524K030B	F	A	3	0	3.0 V
R1524K033B	F	A	3	3	3.3 V
R1524K034B	F	A	3	4	3.4 V
R1524K050B	F	A	5	0	5.0 V
R1524K060B	F	A	6	0	6.0 V
R1524K080B	F	A	8	0	8.0 V
R1524K085B	F	A	8	5	8.5 V
R1524K090B	F	A	9	0	9.0 V



TYPICAL CHARACTERISTICS

Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.

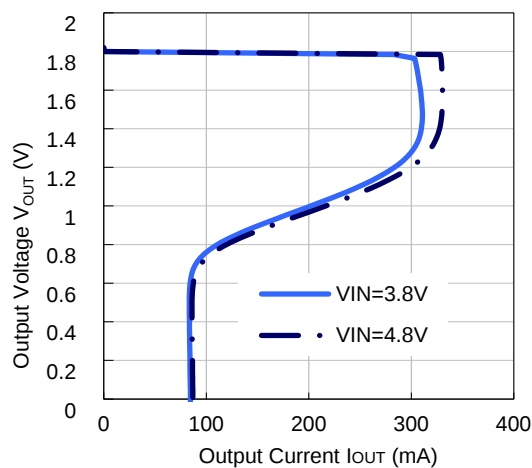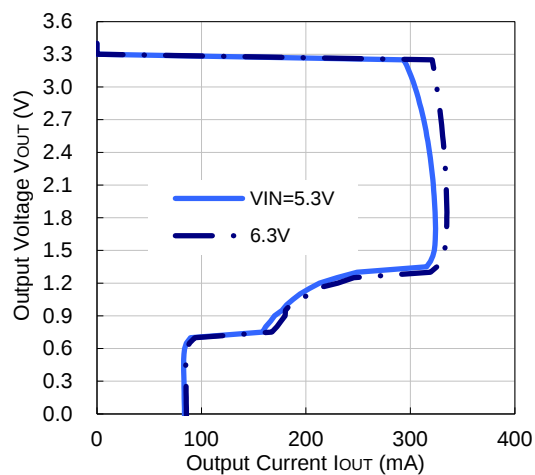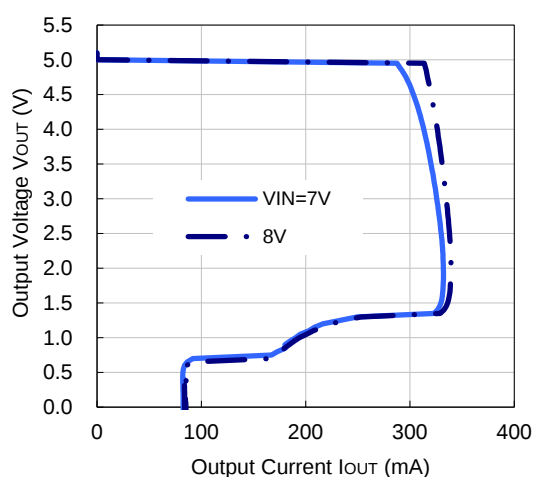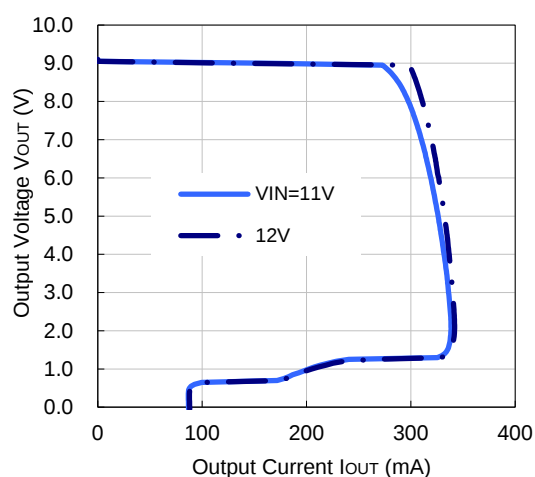
1) Output Voltage vs. Output Current ($T_a = 25^\circ\text{C}$)

R1524x018B

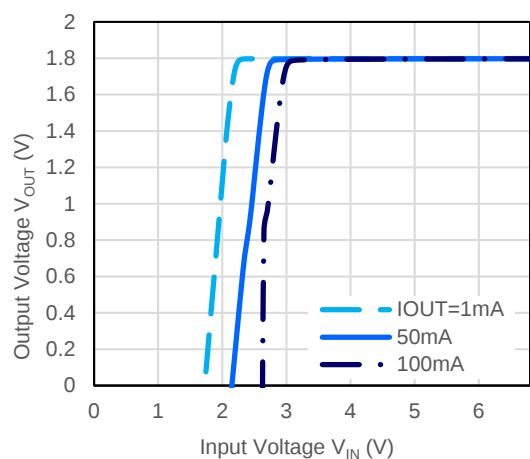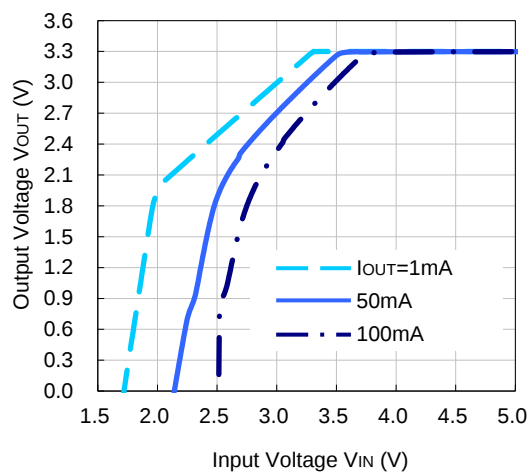R1524x033B

R1524x050B

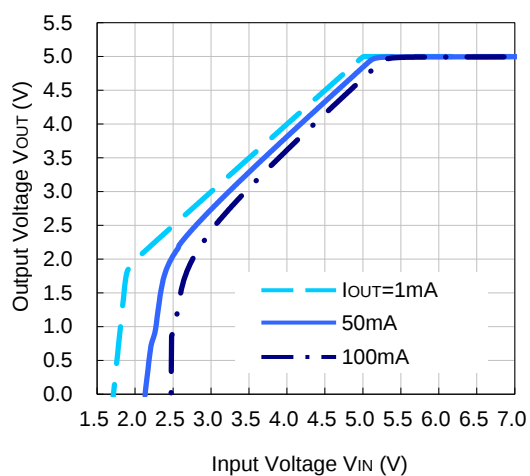R1524x090B


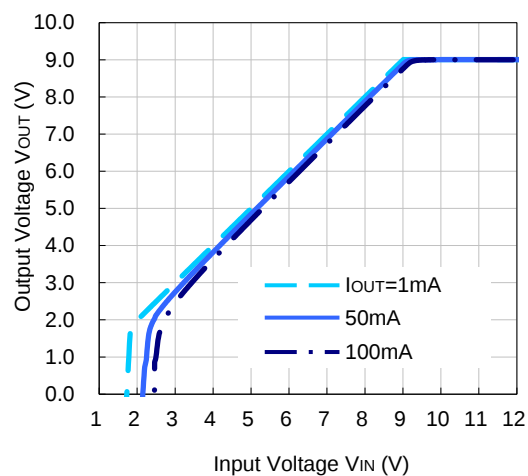
2) Output Voltage vs. Input Voltage ($T_a = 25^\circ\text{C}$)

R1524x018B

R1524x033B


R1524x050B

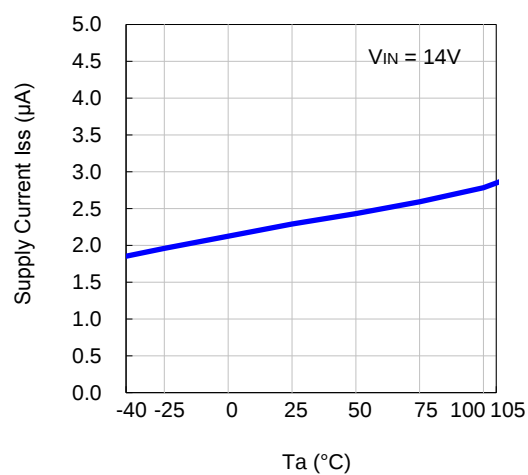


R1524x090B




3) Supply Current vs. Temperature


R1524x018B




R1524x033B






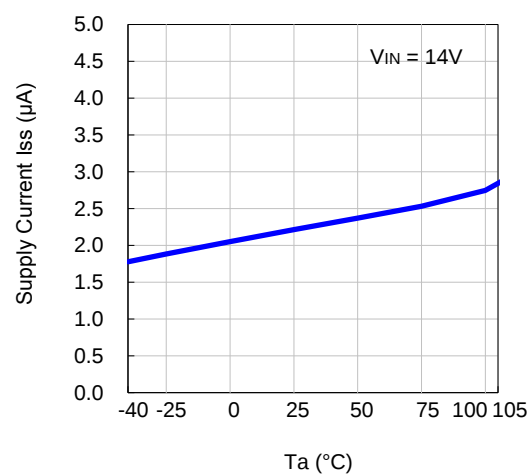


R1524x050B

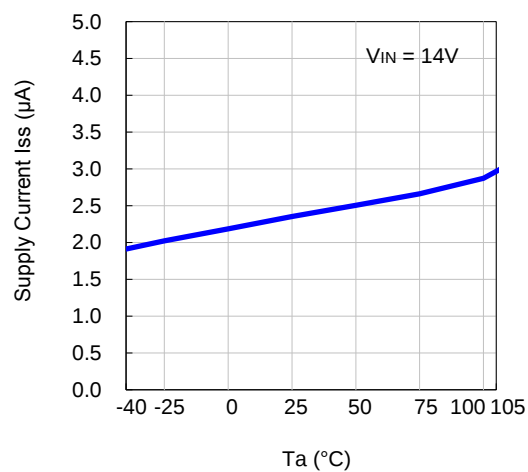


R1524x090B

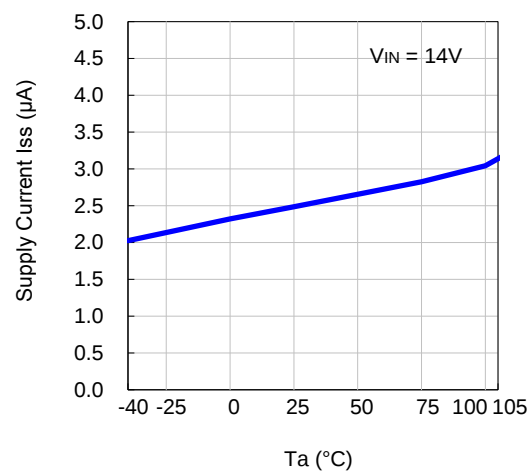

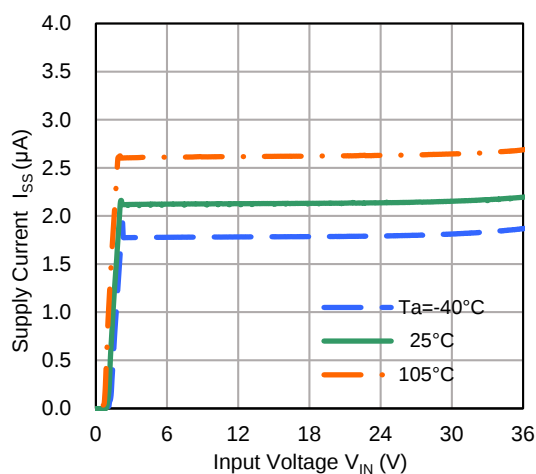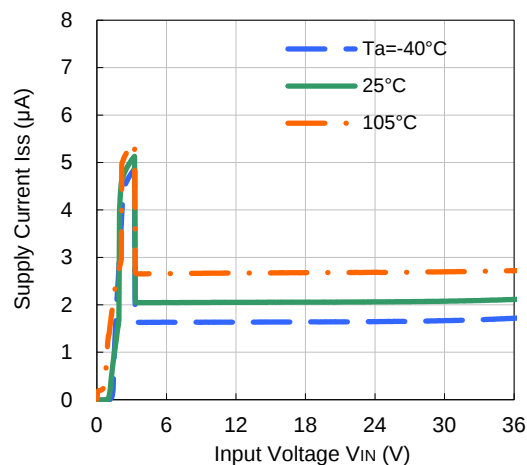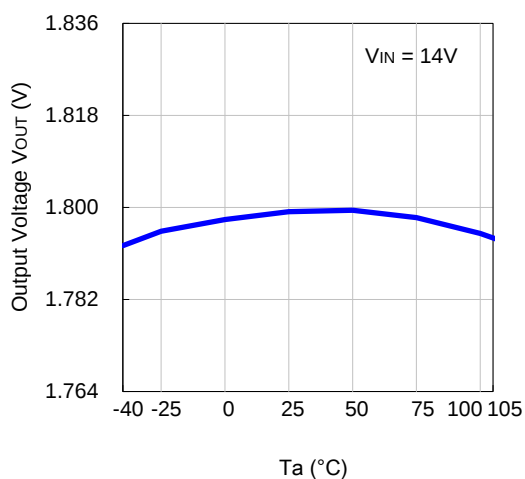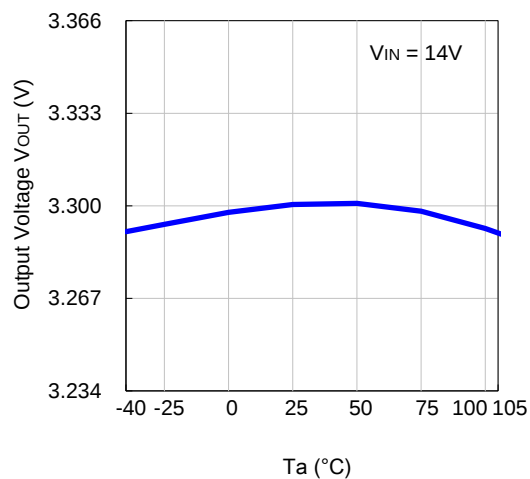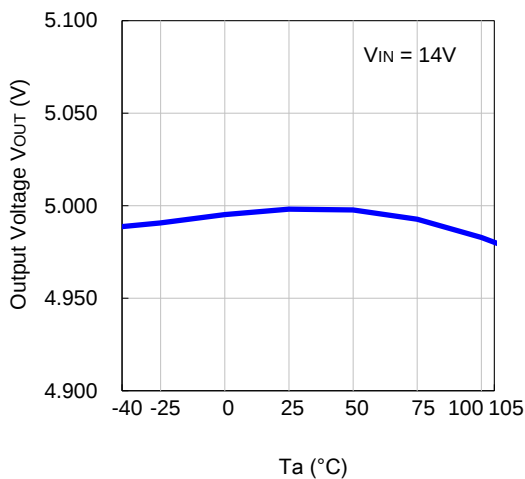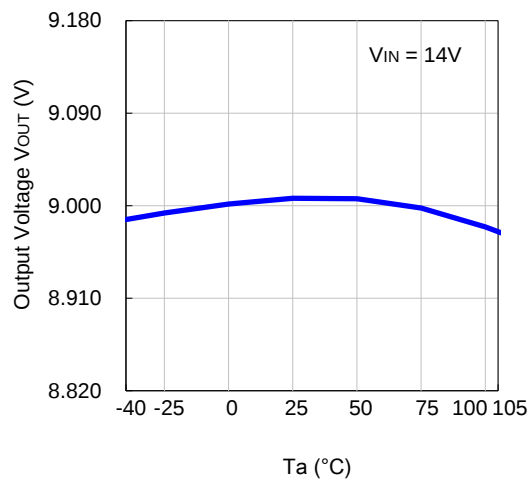
4) Supply Current vs. Input Voltage
R1524x018B

R1524x033B

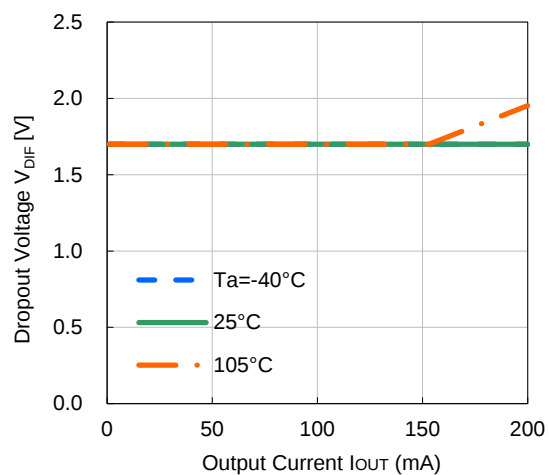5) Output Voltage vs. Temperature ($I_{OUT} = 1\text{ mA}$)
R1524x018B

R1524x033B

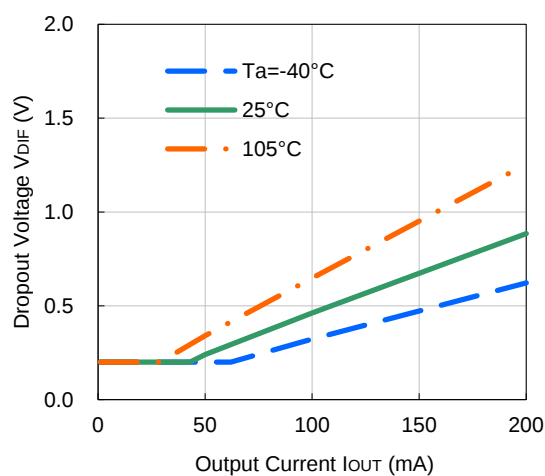R1524x050B

R1524x090B


6) Dropout Voltage vs. Output Current

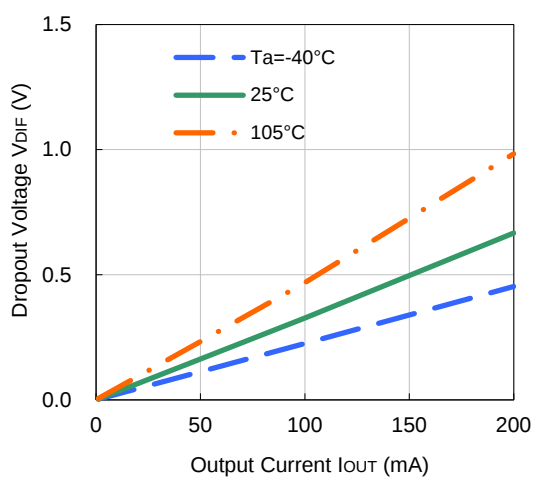
R1524x018B





R1524x033B









R1524x050B




R1524x090B

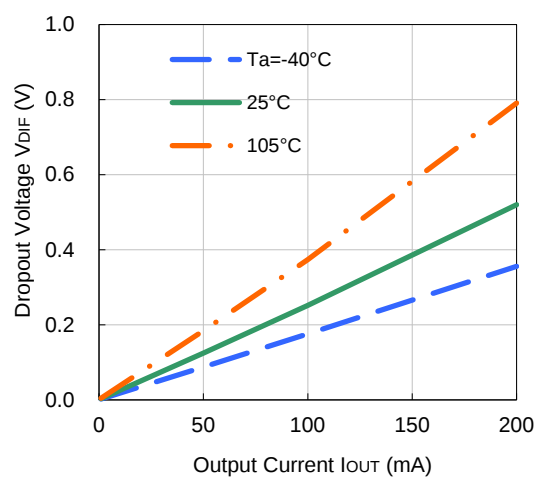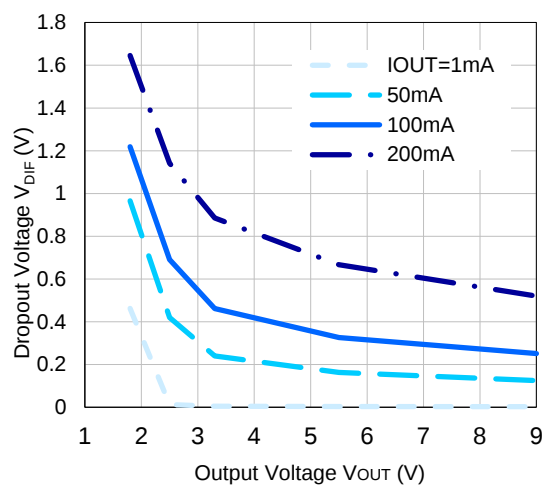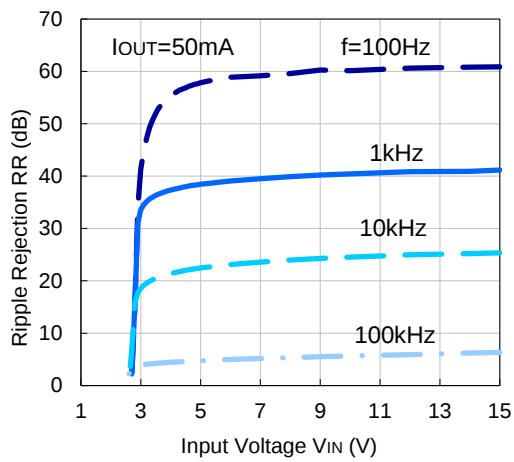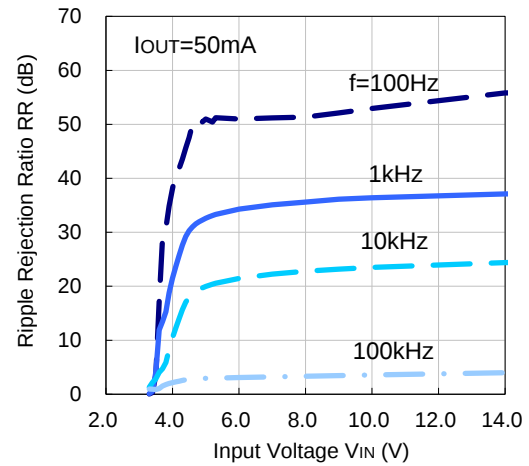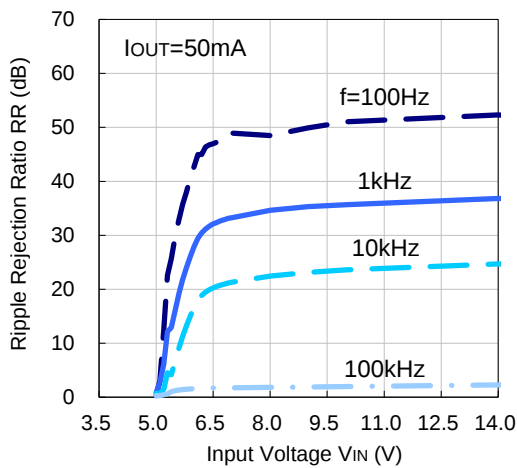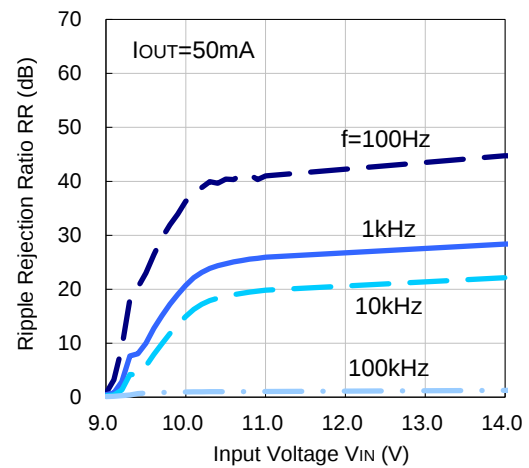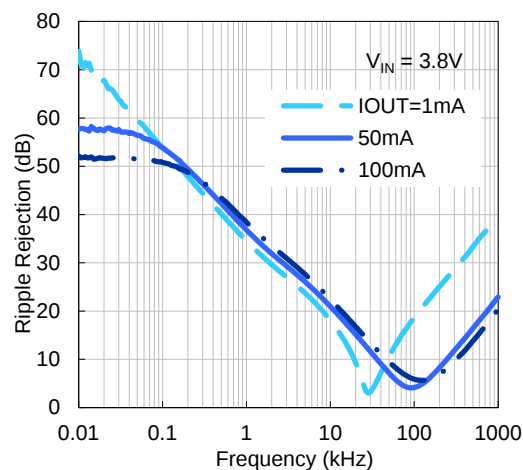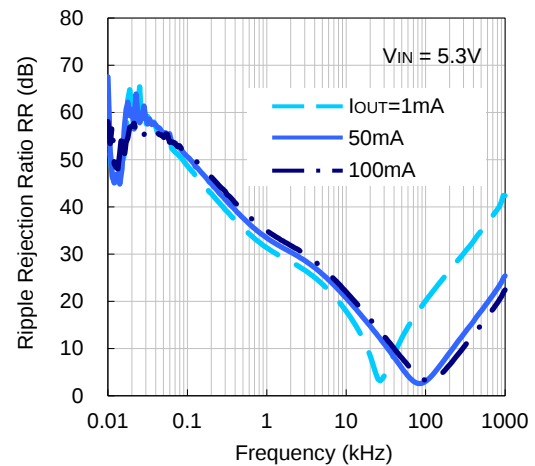
7) Dropout Voltage vs. Output Voltage ($T_a = 25^\circ\text{C}$)

8) Ripple Rejection vs. Input Voltage ($T_a = 25^\circ\text{C}$, Ripple = 0.2 Vpp)
R1524x018B

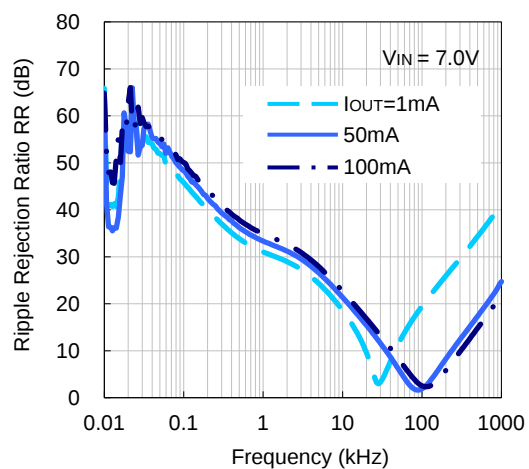R1524x033B

R1524x050B

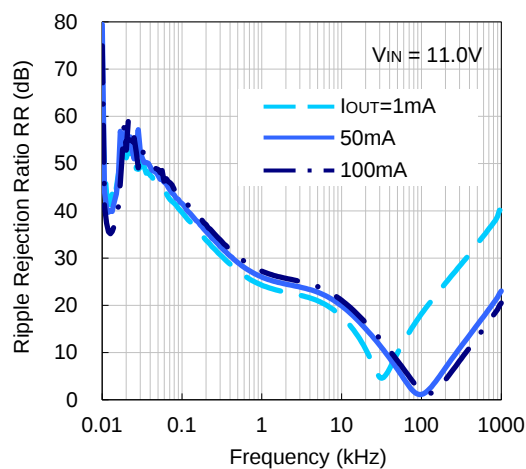R1524x090B

9) Ripple Rejection vs. Frequency ($T_a = 25^\circ\text{C}$, Ripple = 0.2 Vpp)
R1524x018B

R1524x033B


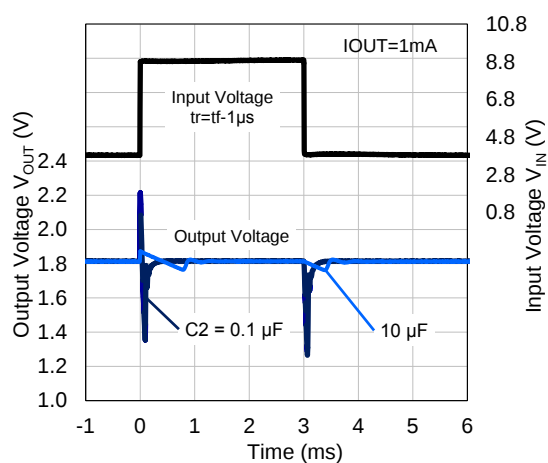
R1524x050B




R1524x090B

10) Input Transient Response ($T_a = 25^\circ C$)


R1524x018B



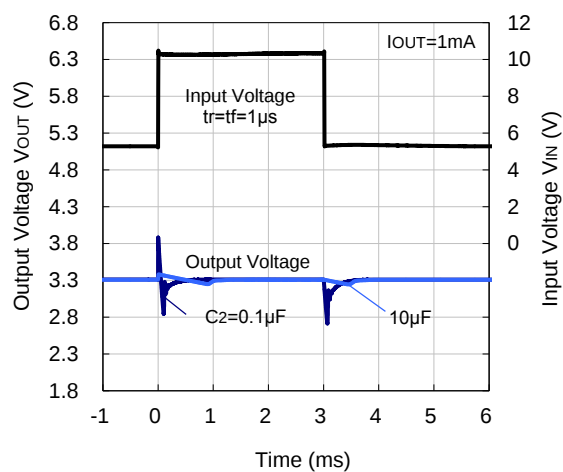
R1524x033B















R1524x050B






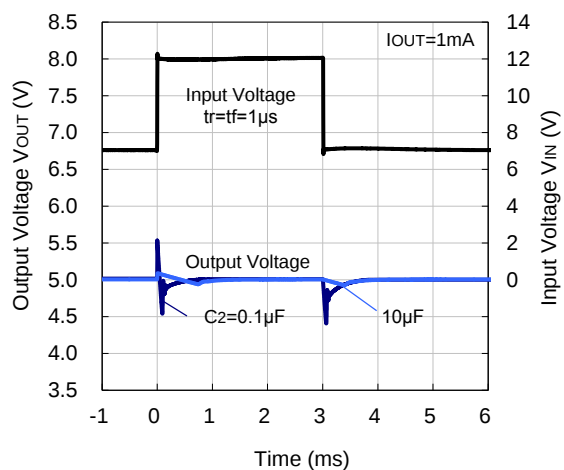


R1524x090B

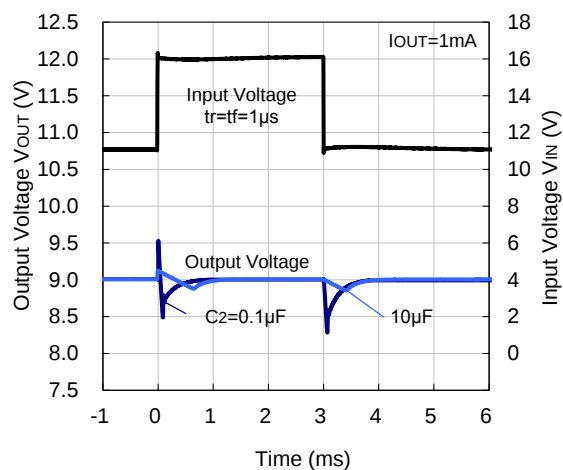


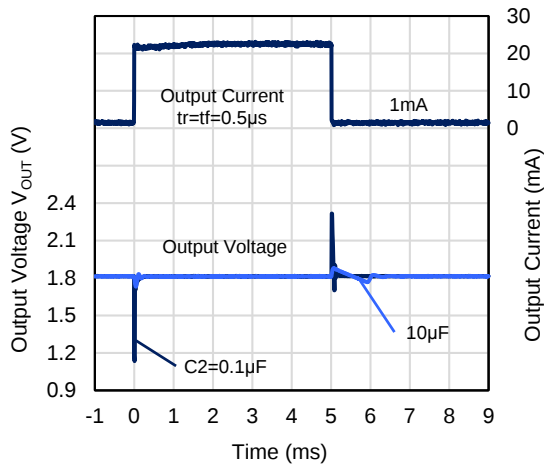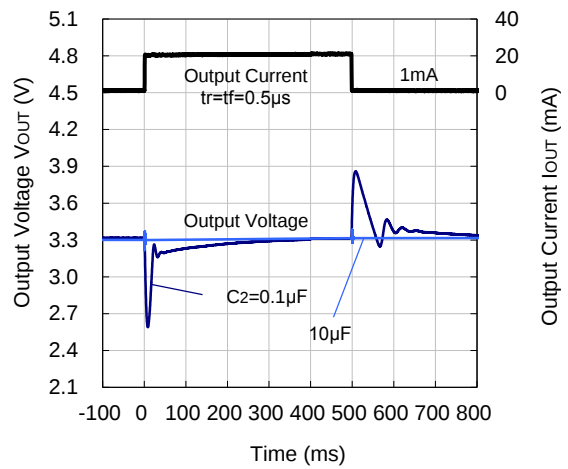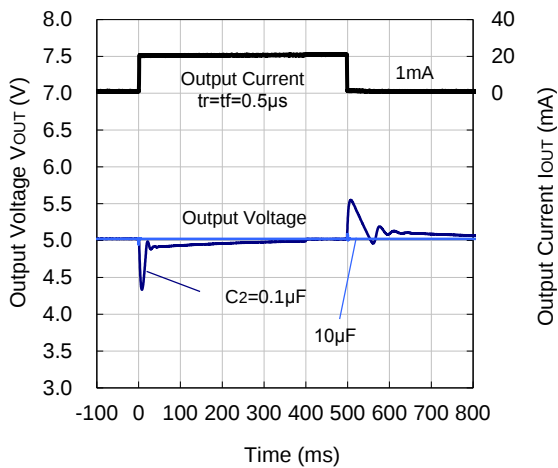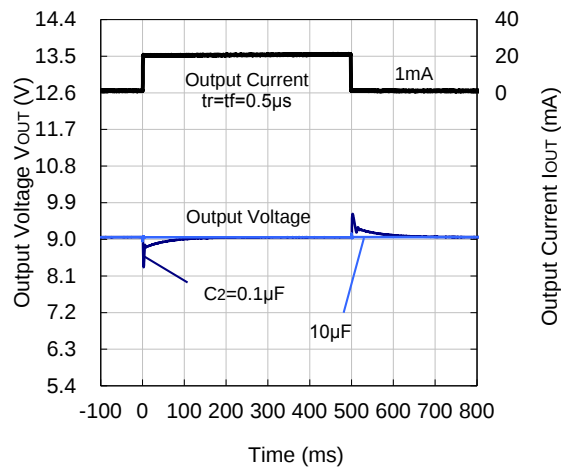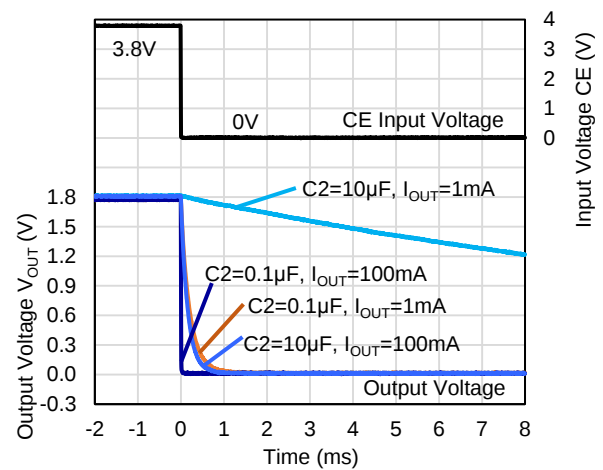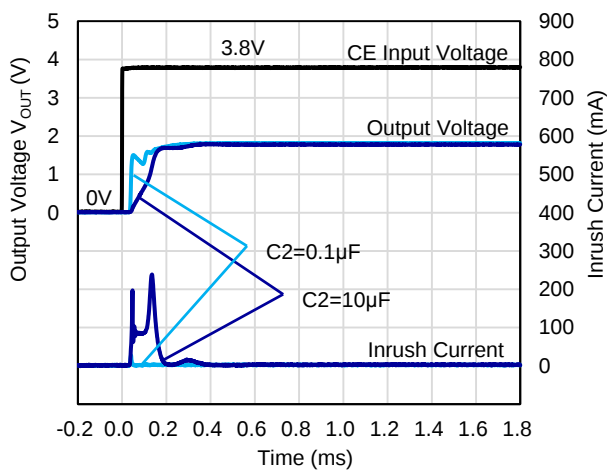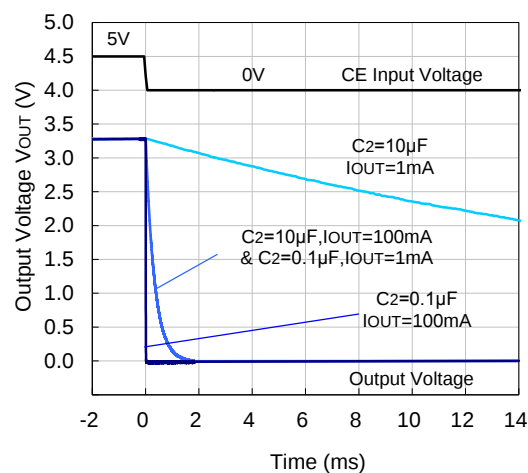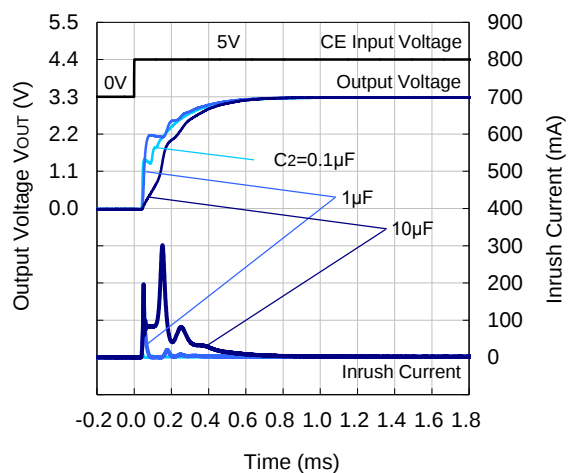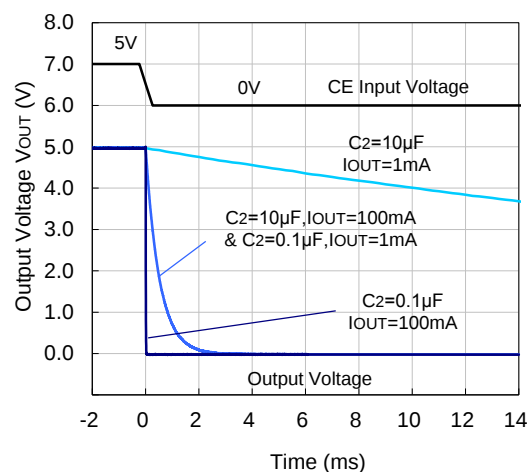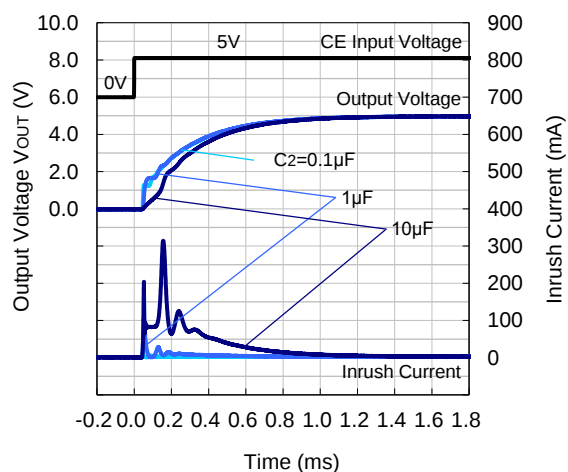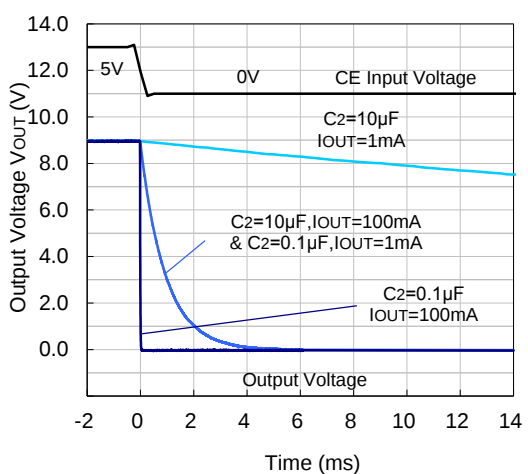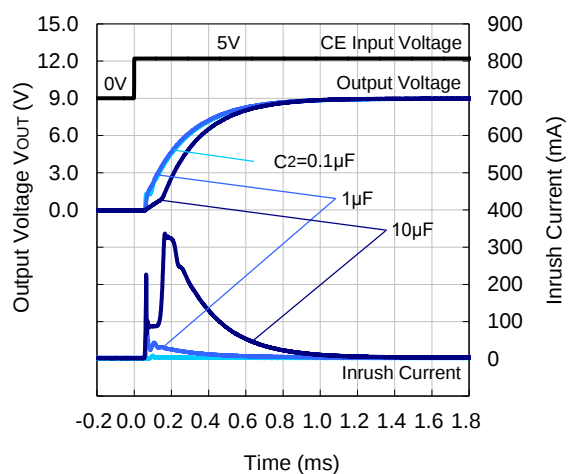11) Load Transient Response ($T_a = 25^\circ\text{C}$)
R1524x018B

R1524x033B

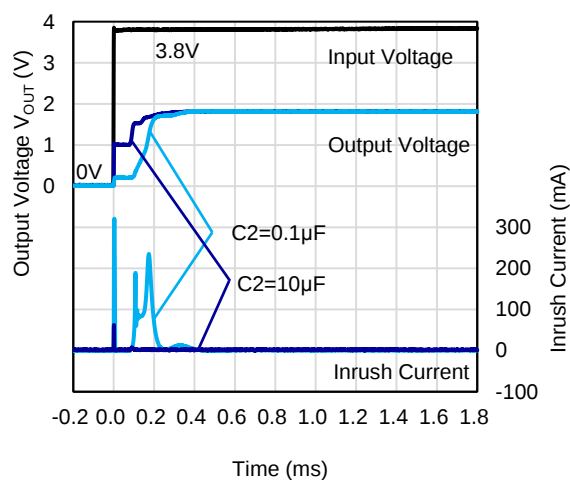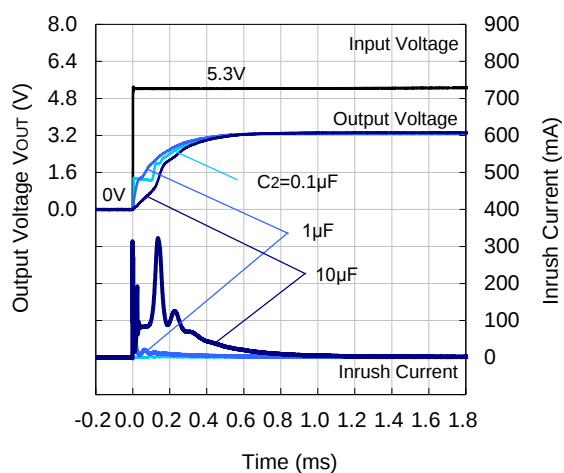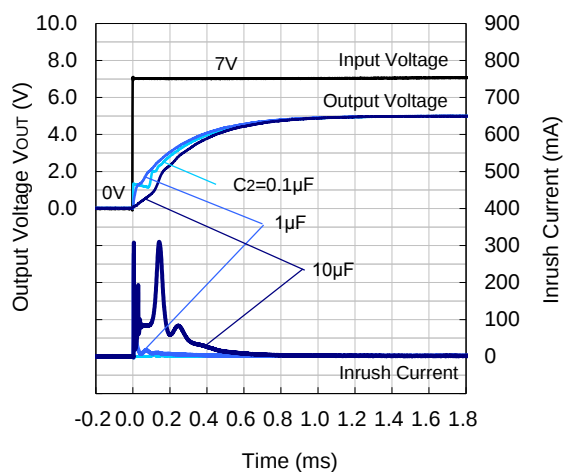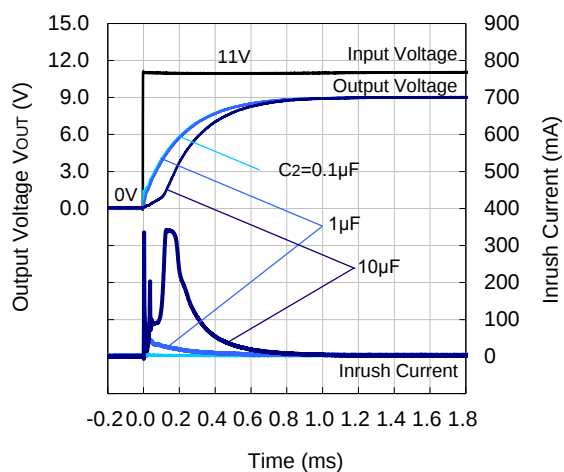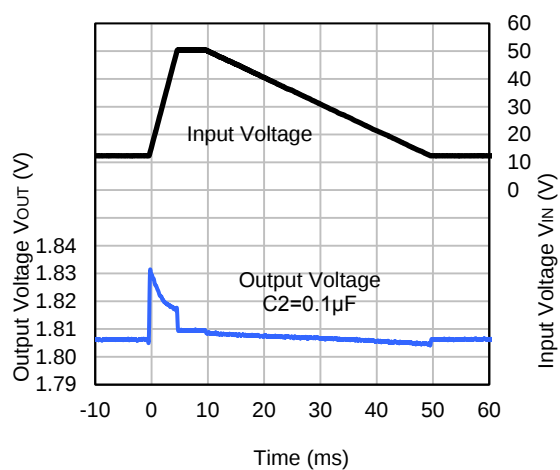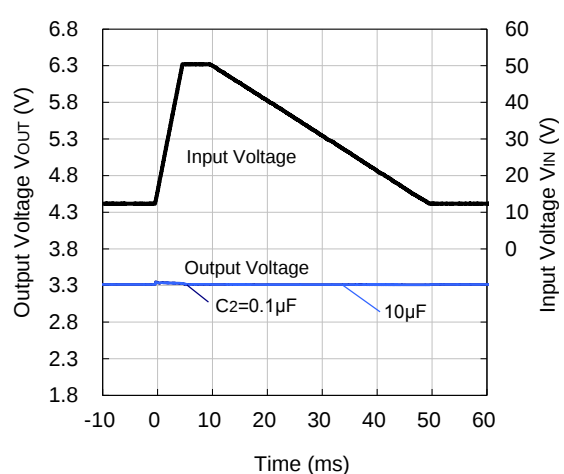R1524x050B

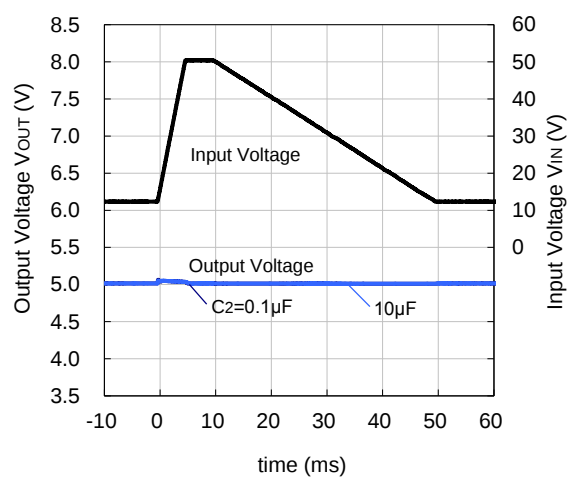R1524x090B

12) CE Transient Response ($T_a = 25^\circ\text{C}$)
R1524x018B


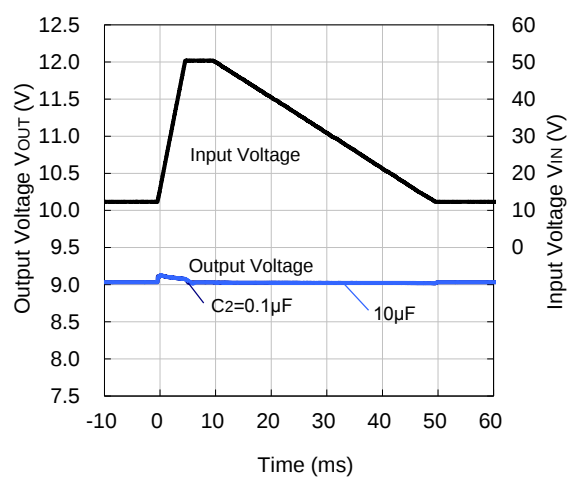
R1524x033B**R1524x050B****R1524x090B**

13) Power-on Transient Response ($T_a = 25^\circ\text{C}$, $V_{CE} = 5\text{ V}$)
R1524x018B

R1524x033B

R1524x050B

R1524x090B

14) Load Dump ($T_a = 25^\circ\text{C}$)
R1524x018B

R1524x033B


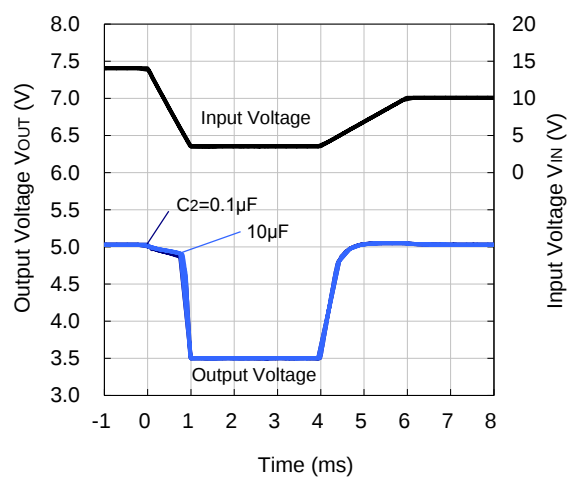
R1524x050B




R1524x090B

15) Cranking ($T_a = 25^\circ C$)

R1524x050B





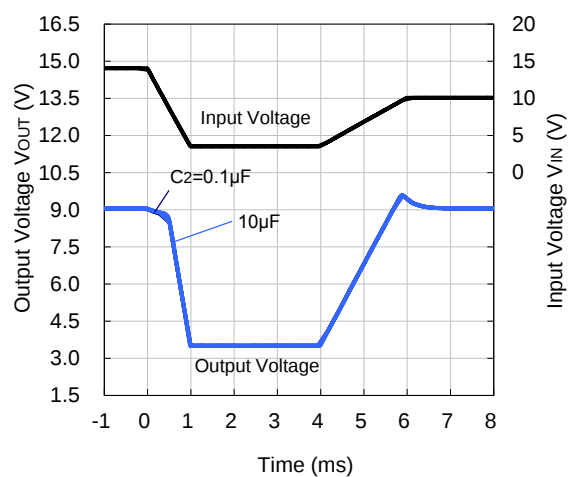R1524x090B




Input Transient/Load Transient vs. Output Capacity (C2)

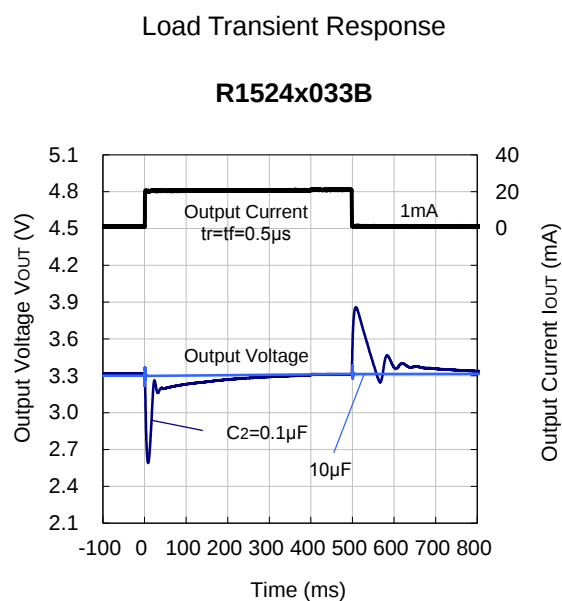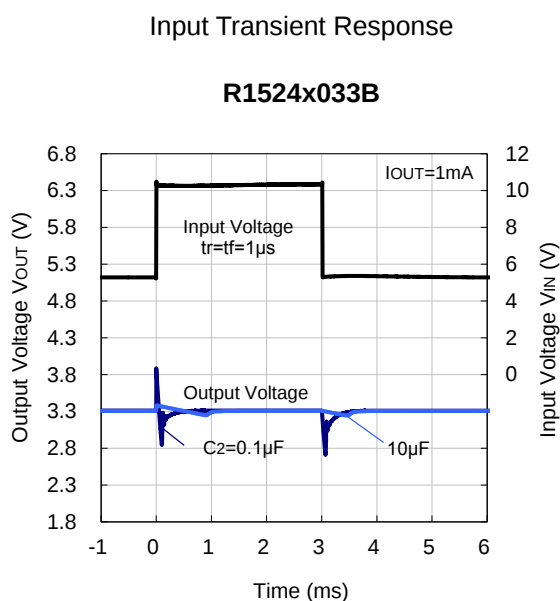R1524 performs a stable operation by using 0.1 μF of ceramic capacitor as the output capacitor. However, the variation of output voltage may not meet the demand of the system when input voltage and load current vary. In such cases, the variation of output voltage can be minimized significantly by using 10 μF or higher ceramic capacitor. When using a high-capacity electrolytic capacitor for the output line, place the electrolytic capacitor a few centimeters apart from the IC after arranging the ceramic capacitor close to the IC.



ESR vs. Output Current

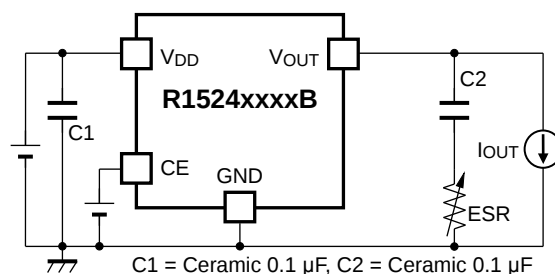It is recommended that a ceramic type capacitor be used for this device. However, other types of capacitors having lower ESR can also be used. The relation between the output current (I_{OUT}) and the ESR of output capacitor is shown below.



Measurement Conditions

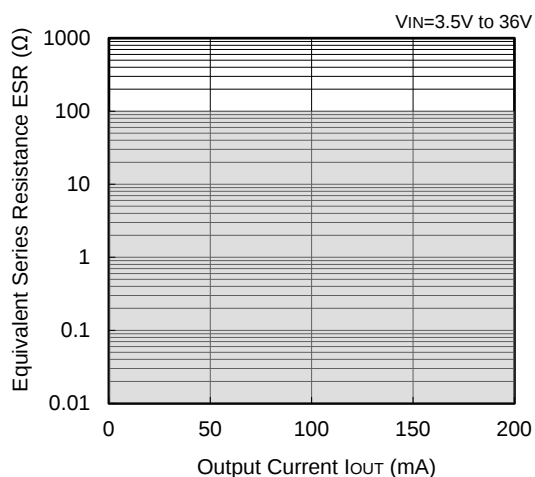
Frequency Band: 10 Hz to 2 MHz

Measurement Temperature: -40°C to 105°C


Hatched area: Noise level is 40 μ V (average) or below

Ceramic Capacitors: C1 = 0.1 μ F, C2 = 0.1 μ F


R1524x018B




R1524x033B

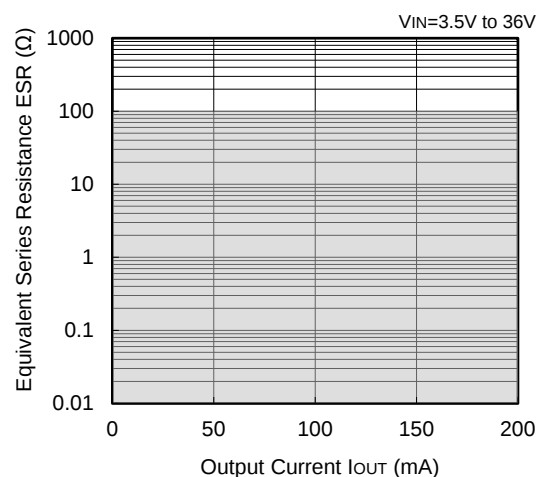

R1524x050B

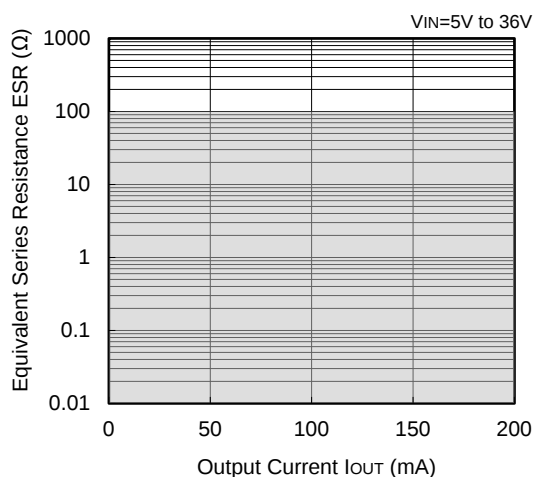

R1524x090B

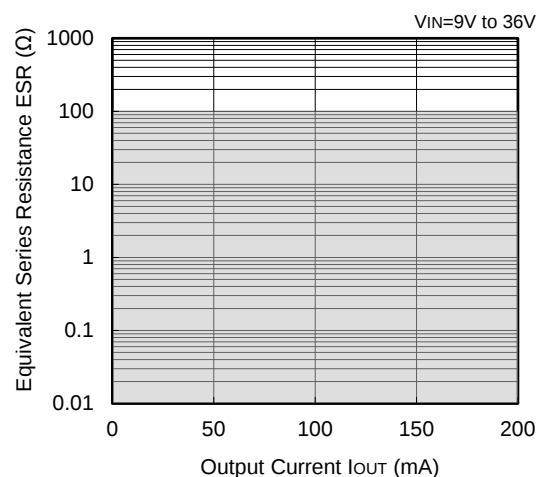



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

RICOH ELECTRONIC DEVICES CO., LTD.

Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre
Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

RICOH INTERNATIONAL B.V. - German Branch

Semiconductor Sales and Support Centre
Oberrather Strasse 6, 40472 Düsseldorf, Germany
Phone: +49-211-6546-0

RICOH ELECTRONIC DEVICES KOREA CO., LTD.

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203, People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH ELECTRONIC DEVICES CO., LTD.

Taipei office
Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ricoh Electronics:

<u>R1524N060B-TR-FE</u>	<u>R1524N085B-TR-FE</u>	<u>R1524S090B-E2-FE</u>	<u>R1524S033B-E2-YE</u>	<u>R1524S090B-E2-YE</u>
<u>R1524S034B-E2-FE</u>	<u>R1524N080B-TR-FE</u>	<u>R1524S033B-E2-FE</u>	<u>R1524N034B-TR-FE</u>	<u>R1524S085B-E2-YE</u>
<u>R1524N050B-TR-FE</u>	<u>R1524S080B-E2-YE</u>	<u>R1524S060B-E2-YE</u>	<u>R1524S060B-E2-FE</u>	<u>R1524S034B-E2-YE</u>
<u>R1524S080B-E2-FE</u>	<u>R1524S085B-E2-FE</u>	<u>R1524S050B-E2-FE</u>	<u>R1524N090B-TR-FE</u>	<u>R1524N033B-TR-FE</u>
<u>R1524N030B-TR-FE</u>	<u>R1524S050B-E2-YE</u>	<u>R1524S050B-E2-KE</u>	<u>R1524S033B-E2-KE</u>	