

Directional valves → Supplementary products

5/2-way valve, Series ST

► Qn= 280 l/min ► pipe connection ► compressed air connection output: G 1/8 ► With spring return



00108065

Version

Sealing principle

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Max. particle size

Oil content of compressed air

Spool valve

not lockable

metal/metal sealing

-0.95 bar / 10 bar

-15°C / +80°C

-15°C / +80°C

Compressed air

5 µm

5 mg/m³ - 25 mg/m³

Mounting screw

mounting screw tightening torque

M4 with hexagon socket

2.5 Nm

Materials:

Housing

Stainless steel, hardened

Technical Remarks

- Notice: This product may only be operated with oiled compressed air.

	Actuating element	Compressed air connection			Qn	Actuating force Min.	Actuating torque Min.	Part No.
		Input	Output	Exhaust				
					[l/min]	[N]	[Nm]	
	Plunger	G 1/8	G 1/8	G 1/8	280	11	-	0820403001
	Roller	G 1/8	G 1/8	G 1/8	280	6.5	-	0820403002
	Roller lever, one-way trip	G 1/8	G 1/8	G 1/8	280	6.5	-	0820403003
	Push button	G 1/8	G 1/8	G 1/8	280	6.5	-	0820403004
	Lever	G 1/8	G 1/8	G 1/8	280	-	0.02	0820403005
	Roller with single-action lever	G 1/8	G 1/8	G 1/8	280	10	-	0820403016
	Roller with articulated lever	G 1/8	G 1/8	G 1/8	280	25	-	0820403017
	Plunger	G 1/8	G 1/8	G 1/8	280	5	-	0820403019
	panel installation	G 1/8	G 1/8	G 1/8	280	11	-	R422002213

Supplementary products

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
Pneumatics catalog, online PDF, as of 2013-01-07, © Bosch Rexroth AG, subject to change

Directional valves → Supplementary products

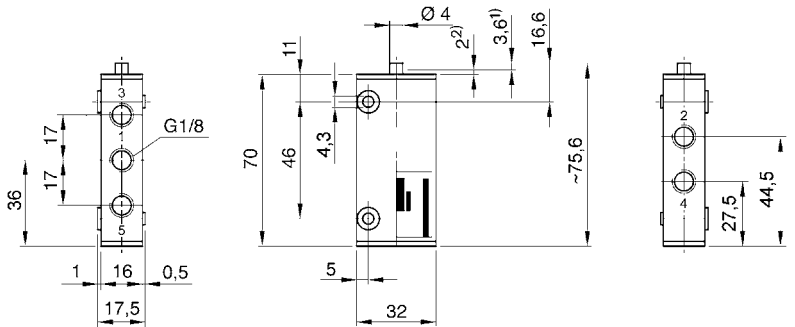
5/2-way valve, Series ST

▶ Qn= 280 l/min ▶ pipe connection ▶ compressed air connection output: G 1/8 ▶ With spring return

Part No.	Material: Actuating control	Weight	Fig.	Note
		[kg]		
0820403001	Stainless steel	0.22	Fig. 1	-
0820403002	Polyoxymethylene	0.23	Fig. 2	-
0820403003	Polyoxymethylene	0.23	Fig. 3	-
0820403004	Polyamide	0.23	Fig. 4	-
0820403005	Polyamide	0.22	Fig. 5	-
0820403016	Polyoxymethylene	0.34	Fig. 6	-
0820403017	Polyoxymethylene	0.34	Fig. 7	-
0820403019	Stainless steel	0.22	Fig. 8	-
R422002213	Polyoxymethylene	0.22	Fig. 9	1)

1) Please order control button separately.
Nominal flow Qn at 6 bar and Δp = 1 bar

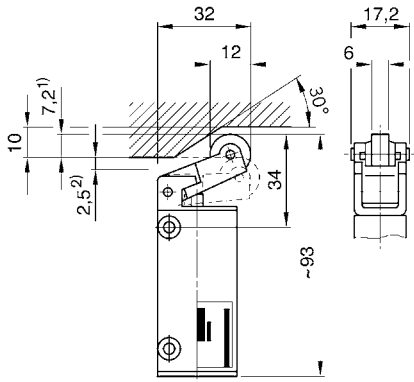
Dimensions, Fig. 1, Basic valve



00108066

1) Actuating stroke 2) overstroke
 connection via 2 through-holes in housing
 Dimensions of basic valve apply to all types of actuation.

Dimensions, Fig. 2



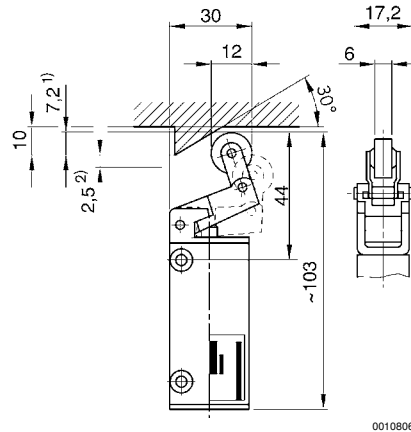
00108067

1) Actuating stroke 2) overstroke
 connection via 2 through-holes in housing

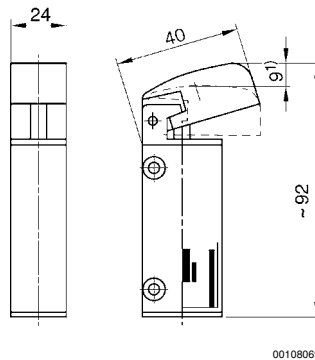
Directional valves → Supplementary products

5/2-way valve, Series ST


► Qn= 280 l/min ► pipe connection ► compressed air connection output: G 1/8 ► With spring return

Dimensions, Fig. 3

1) Actuating stroke 2) overstroke
connection via 2 through-holes in housing

Dimensions, Fig. 4

1) actuating stroke
Mounting via 2 through-holes in housing

Dimensions, Fig. 5

Mounting via 2 through-holes in housing

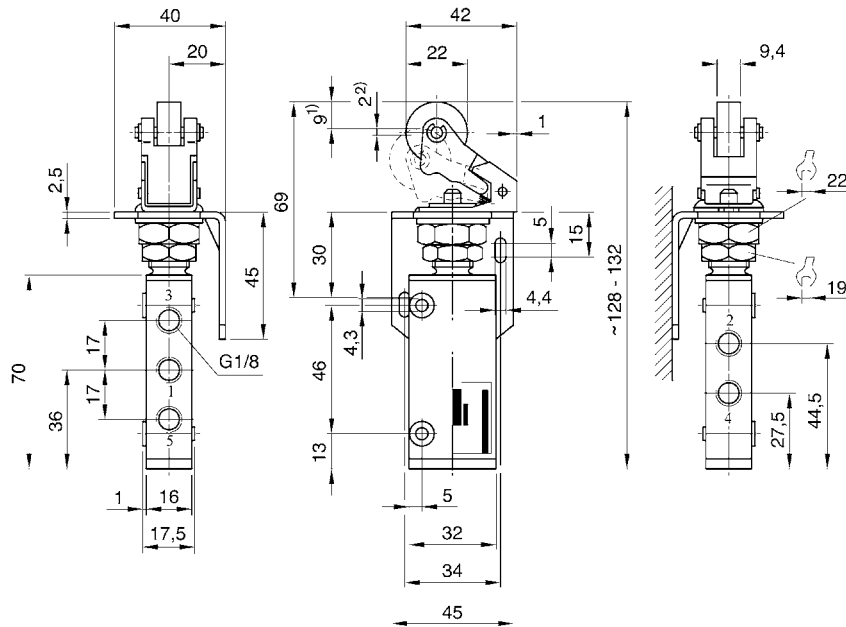
Supplementary products

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
Pneumatics catalog, online PDF, as of 2013-01-07, © Bosch Rexroth AG, subject to change

Directional valves → Supplementary products

5/2-way valve, Series ST

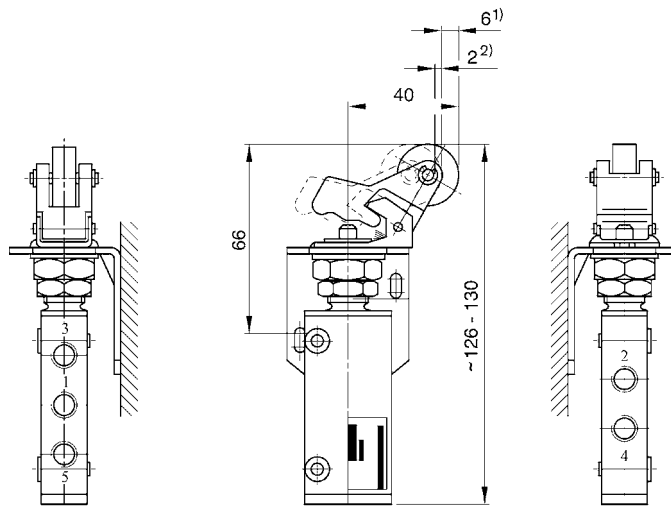
► Qn= 280 l/min ► pipe connection ► compressed air connection output: G 1/8 ► With spring return

Dimensions, Fig. 6

00108072

1) actuating stroke 2) overstroke

Can be adjusted by 90°, thereby providing 4 different angles of approach.

Dimensions, Fig. 7

00108073

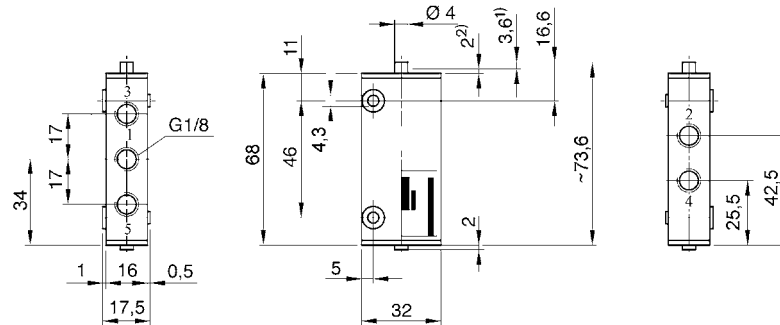
1) actuating stroke 2) overstroke

Can be adjusted by 90°, thereby providing 4 different angles of approach.

Supplementary products

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
 Pneumatics catalog, online PDF, as of 2013-01-07, © Bosch Rexroth AG, subject to change

Directional valves → Supplementary products

5/2-way valve, Series ST► Q_n= 280 l/min ► pipe connection ► compressed air connection output: G 1/8 ► With spring return**Dimensions, Fig. 8**

00130355

1) actuating stroke 2) overstroke

connection via 2 through-holes in housing. If the plunger is displaced all the way to the housing cover, the actuating stroke changes from 3.6 to 5.6 mm.

Supplementary products

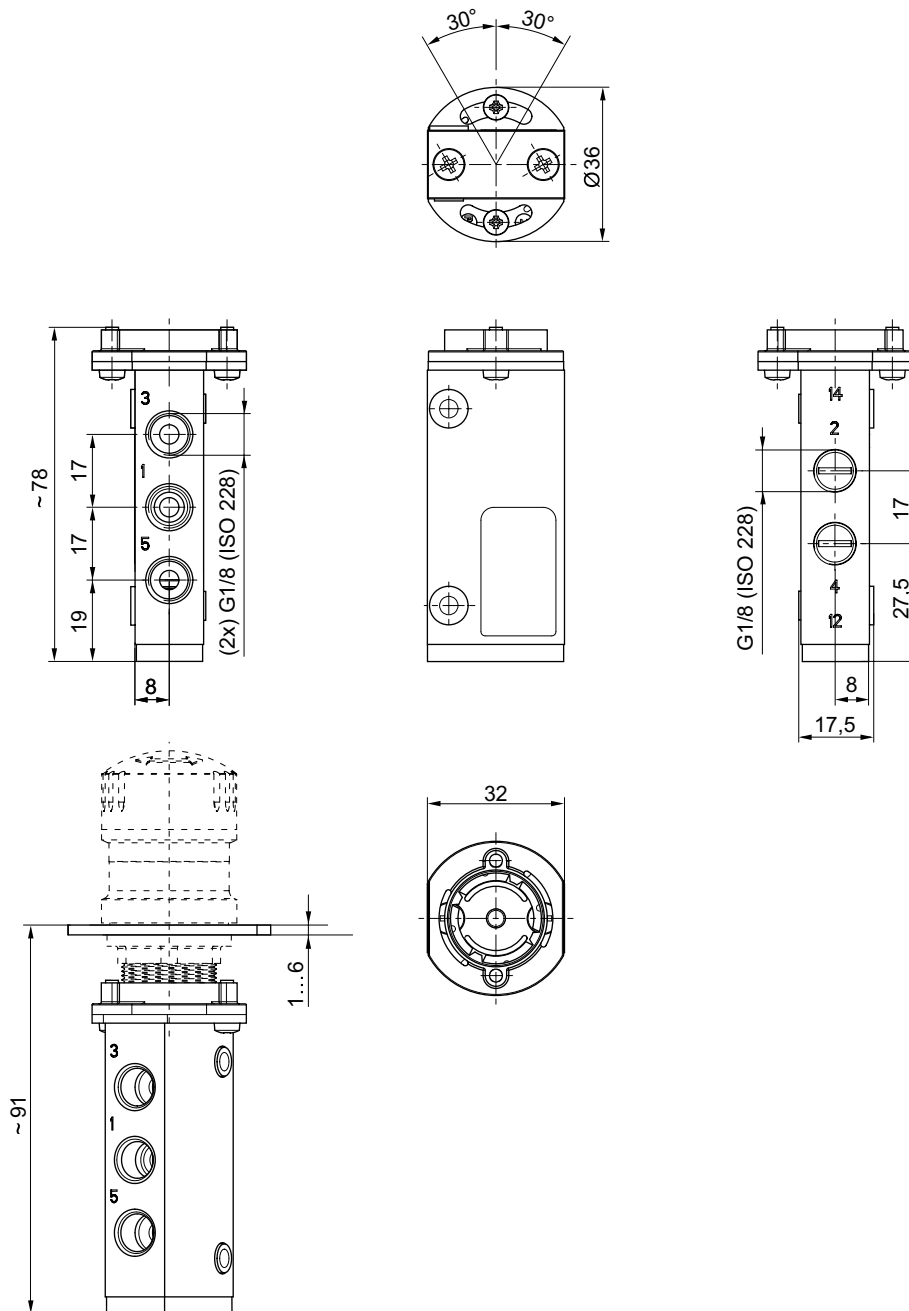
Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
Pneumatics catalog, online PDF, as of 2013-01-07, © Bosch Rexroth AG, subject to change

Directional valves → Supplementary products

5/2-way valve, Series ST

► Qn= 280 l/min ► pipe connection ► compressed air connection output: G 1/8 ► With spring return

Dimensions, Fig. 9



00136368

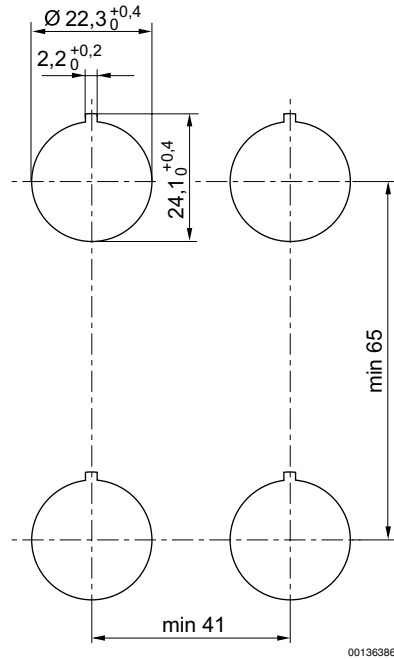
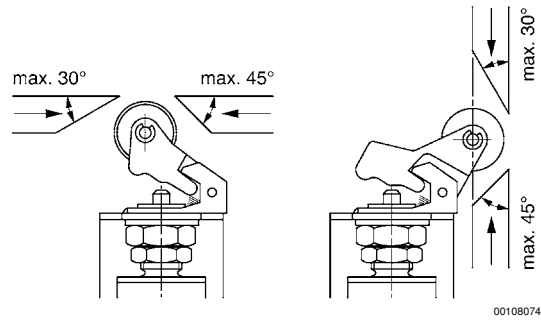
Supplementary products

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
 Pneumatics catalog, online PDF, as of 2013-01-07, © Bosch Rexroth AG, subject to change

Directional valves → Supplementary products

5/2-way valve, Series ST

► Qn= 280 l/min ► pipe connection ► compressed air connection output: G 1/8 ► With spring return

Dimensions, cut-out in the front plate**angle of approach for 0820403016 and 0820403017**

Supplementary products

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
 Pneumatics catalog, online PDF, as of 2013-01-07, © Bosch Rexroth AG, subject to change