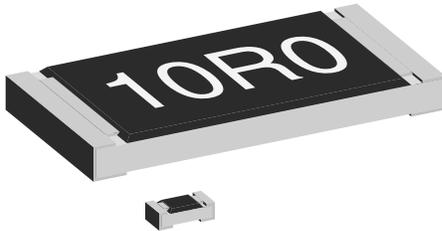


## Automotive Grade Thick Film, Rectangular Chip Resistors



### FEATURES

- Metal glaze on high quality ceramic with protective overglaze
- Sulfur resistant
- Superior resistance against H<sub>2</sub>S-atmosphere than standard Ag contacts
- Solder contacts on Ni barrier layer
- Excellent stability ( $\Delta R/R \leq \pm 0.5\%$  for 1000 hours at 70 °C) different environmental conditions
- High volume product suitable for commercial and special applications
- Automotive Grade = sulfur resistant

### STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE		POWER RATING $P_{70\text{ }^\circ\text{C}}$ W	LIMITING ELEMENT VOLTAGE MAX V <sub>≡</sub>	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	E-SERIES
	INCH	METRIC	CECC 40401-802/EIA-575					
RCA0402	0402	1005	0.063	50	± 50 ± 100 ± 100 ± 200 ± 200	± 0.5, ± 1 ± 0.5 ± 1 ± 1 ± 5	100R - 1M0 10R - 1M0 10R - 5M6 1R0 - 9R76 1R0 - 10M	24 + 96 24 + 96 24 + 96 24 + 96 24
RCA0603	0603	1608	0.10	75	± 50 ± 100 ± 200 ± 200	± 0.5, ± 1 ± 0.5, ± 1 ± 1 ± 5	100R - 10M 10R - 10M 1R0 - 9R76 1R0 - 10M	24 + 96 24 + 96 24 + 96 24
RCA0805	0805	2012	0.125	150	± 50 ± 100 ± 100 ± 200	± 0.5, ± 1 ± 0.5 ± 1 ± 5	100R - 10M 10R - 10M 1R0 - 10M 1R0 - 10M	24 + 96 24 + 96 24 + 96 24
RCA1206	1206	3216	0.25	200	± 50 ± 100 ± 100 ± 200	± 0.5, ± 1 ± 0.5 ± 1 ± 5	100R - 10M 10R - 10M 1R0 - 10M 1R0 - 10M	24 + 96 24 + 96 24 + 96 24
RCA1210	1210	3225	0.33	200	± 50 ± 100 ± 100 ± 200	± 0.5, ± 1 ± 0.5 ± 1 ± 5	100R - 1M0 100R - 1M0 1R0 - 1M0 1R0 - 1M0	24 + 96 24 + 96 24 + 96 24
RCA1218	1218	3246	1.0	200	± 50 ± 100 ± 100 ± 200	± 0.5, ± 1 ± 0.5 ± 1 ± 5	100R - 2M2 100R - 2M2 1R0 - 2M2 1R0 - 2M2	24 + 96 24 + 96 24 + 96 24
RCA2010	2010	5025	0.50	400	± 50 ± 100 ± 100 ± 200	± 0.5, ± 1 ± 0.5 ± 1 ± 5	100R - 10M 10R - 10M 1R0 - 10M 1R0 - 10M	24 + 96 24 + 96 24 + 96 24
RCA2512	2512	6332	1.0	500	± 50 ± 100 ± 100 ± 200	± 0.5, ± 1 ± 0.5 ± 1 ± 5	100R - 10M 10R - 10M 1R0 - 10M 1R0 - 10M	24 + 96 24 + 96 24 + 96 24

#### Notes:

- Ask about further value ranges
- Marking and packaging: see appropriate catalog or web pages
- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material

Automotive Grade  
Thick Film, Rectangular Chip Resistors


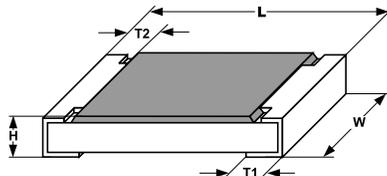
TECHNICAL SPECIFICATIONS									
PARAMETER	UNIT	RCA0402	RCA0603	RCA0805	RCA1206	RCA1210	RCA1218	RCA2010	RCA2512
Rated Dissipation at 70 °C (CECC 40401   EIA 575)	W	0.063	0.10	0.125	0.25	0.33	1.0	0.5	1.0
Limiting Element Voltage <sup>(2)</sup>	V <sub>≡</sub>	50	75	150	200	200	200	400	500
Insulation Voltage (1 min)	V <sub>peak</sub>	> 75	> 100	> 200	> 300	> 300	> 300	> 300	> 300
Thermal Resistance	K/W	≤ 870 <sup>(1)</sup>	≤ 550 <sup>(1)</sup>	≤ 440 <sup>(1)</sup>	≤ 220 <sup>(1)</sup>	≤ 140 <sup>(3)</sup>	<sup>(3)</sup>	≤ 88 <sup>(3)</sup>	≤ 65 <sup>(3)</sup>
Insulation Resistance	Ω	> 10 <sup>9</sup>							
Category Temperature Range	°C	- 55 to + 125 (+ 155)							
Failure Rate	h <sup>-1</sup>	0.3 × 10 <sup>-9</sup>							
Weight/1000 pieces	g	0.65	2	5.5	10	16	29.5	25.5	40.5

**Notes:**

<sup>(1)</sup> Measuring conditions in acc. to CECC 40401

<sup>(2)</sup> Rated voltage:  $\sqrt{P \times R}$

<sup>(3)</sup> Depending on solder pad dimensions

**DIMENSIONS**


SIZE		DIMENSIONS [in millimeters]					SOLDER PAD DIMENSIONS [in millimeters]					
							REFLOW SOLDERING			WAVE SOLDERING		
INCH	METRIC	L	W	H	T1	T2	a	b	l	a	b	l
0402	1005	1.0 ± 0.05	0.5 ± 0.05	0.35 ± 0.05	0.25 ± 0.05	0.2 ± 0.1	0.4	0.6	0.5			
0603	1608	1.55 <sup>+0.10</sup> <sub>-0.05</sub>	0.85 ± 0.1	0.45 ± 0.05	0.3 ± 0.2	0.3 ± 0.2	0.5	0.9	1.0	0.9	0.9	1.0
0805	2012	2.0 <sup>+0.20</sup> <sub>-0.10</sub>	1.25 ± 0.15	0.45 ± 0.05	0.3 <sup>+0.20</sup> <sub>-0.10</sub>	0.3 ± 0.2	0.7	1.3	1.2	0.9	1.3	1.3
1206	3216	3.2 <sup>+0.10</sup> <sub>-0.20</sub>	1.6 ± 0.15	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	0.9	1.7	2.0	1.1	1.7	2.3
1210	3225	3.2 ± 0.2	2.5 ± 0.2	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	0.9	2.5	2.0	1.1	2.5	2.2
1218	3246	3.2 <sup>+0.10</sup> <sub>-0.20</sub>	4.6 ± 0.15	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	1.05	4.9	1.9	1.25	4.8	1.9
2010	5025	5.0 ± 0.15	2.5 ± 0.15	0.6 ± 0.1	0.6 ± 0.2	0.6 ± 0.2	1.0	2.5	3.9	1.2	2.5	3.9
2512	6332	6.3 ± 0.2	3.15 ± 0.15	0.6 ± 0.1	0.6 ± 0.2	0.6 ± 0.2	1.0	3.2	5.2	1.2	3.2	5.2

**PART NUMBER AND PRODUCT DESCRIPTION RCA - SERIES**
**PART NUMBERING: RCA080510K0FKTA**

R	C	A	0	8	0	5	1	0	K	0	F	K	T	A		
MODEL	SIZE		VALUE		TOLERANCE		TCR		PACKAGING			SPECIAL				
RCA	0402	1210	R = decimal	D = ± 0.5 %	H = ± 50 ppm/K	TA = RT1		TG = R67				up to 2 digits				
	0603	1218	K = thousand	F = ± 1.0 %	K = ± 100 ppm/K	TB = RT5		TH = R82								
	0805	2010	M = million	J = ± 5.0 %	N = ± 200 ppm/K	TC = RT6		TK = RT9								
	1206	2512	1K32 = 1.32 kΩ			TD = RT7		BA = B27								
			10R0 = 10 Ω			TF = R02										
			0000 = Jumper													

**PRODUCT DESCRIPTION: RCA0805 10K 1 % 100 RT1**

<b>RCA0805</b>	<b>10K</b>	<b>1 %</b>	<b>100</b>	<b>RT1</b>
MODEL	RESISTANCE VALUE	TOLERANCE	TCR	PACKAGING <sup>(1)</sup>
RCA0402 RCA1210 RCA0603 RCA1218 RCA0805 RCA2010 RCA1206 RCA2512	49R9 = 49.9 Ω 3011 = 3.01 kΩ	± 0.5 % ± 1 % ± 5 %	± 50 ppm/K ± 100 ppm/K ± 200 ppm/K	RT1 R67 RT5 R82 RT6 RT9 RT7 B27 R02

**Notes:**

<sup>(1)</sup> Please refer to table PACKAGING, see next page.

• Products can be ordered either using the PRODUCT DESCRIPTION or PART NUMBER.

PACKAGING								
MODEL	REEL					BULK		
	TAPE WIDTH	DIAMETER	PIECES/REEL	PITCH	PACKING CODE		BULK FEEDING MAGAZINE PIECES/MAGAZINE	
					PAPER	BLISTER	PIECES	CODE
RCA0402	8 mm	180 mm/7"	10 000	2 mm	RT7		50 000	B27
		330 mm/13"	50 000	2 mm	RF4			
RCA0603	8 mm	180 mm/7"	5000	4 mm	RT1		25 000	B27
		255 mm/10"	10 000	4 mm	RT5			
		330 mm/13"	20 000	4 mm	RT6			
RCA0805	8 mm	180 mm/7"	5000	4 mm	RT1		10 000	B27
		255 mm/10"	10 000	4 mm	RT5			
		330 mm/13"	20 000	4 mm	RT6			
RCA1206	8 mm	180 mm/7"	5000	4 mm	RT1			
		255 mm/10"	10 000	4 mm	RT5			
		330 mm/13"	20 000	4 mm	RT6			
RCA1210	8 mm	180 mm/7"	5000	4 mm	RT1			
		330 mm/13"	20 000	4 mm	RT6			
RCA1218	12 mm	180 mm/7"	4000	4 mm		RT9		
RCA2010	12 mm	180 mm/7"	4000	4 mm		R02		
RCA2512	12 mm	180 mm/7"	2000	8 mm		R67		
			4000	4 mm		R82		



Automotive Grade  
Thick Film, Rectangular Chip Resistors

<b>PERFORMANCE</b>				
TEST	CONDITIONS OF TEST	TEST RESULTS %		
		0402 0603	0805 1206 1210	1218 2010 2512
Endurance Test at 70 °C IEC 60115-1 4.25.1	1000 hours at 70 °C, 1.5 hours "ON", 0.5 hours "OFF"	≤ ± 1.0	≤ ± 0.5	≤ ± 1.0
Endurance at UCT IEC 60115-1 4.25.3	1000 hours at 125 °C without load	≤ ± 1.0	≤ ± 0.5	≤ ± 1.0
Overload Test IEC 60115-1 4.13	Short time overload  2.5 x rated voltage or ≤ 2 x limiting element voltage.	≤ ± 0.25	≤ ± 0.25	≤ ± 0.5
Thermal Shock IEC 60115-1 4.19; IEC 60068-2-14;	Rapid change between upper and lower category temperature	≤ ± 0.25	≤ ± 0.25	≤ ± 0.5
Damp Heat Steady State IEC 60115-1 4.24; IEC 60068-2-3	56 days at 40 °C and 93 % relative humidity	≤ ± 1.0	≤ ± 0.5	≤ ± 1.0
Resistance to Soldering Heat IEC 60115-1 4.18; IEC 60068-2-20	10 seconds at 260 °C solder bath temperature	≤ ± 0.25	≤ ± 0.25	≤ ± 0.5

**Note:**

- For more details please refer to datasheet D../CRCW.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)

[RCA2010127RFKEF](#) [RCA12182K00FKTK](#) [RCA12182R20FKTK](#) [RCA12061R00FKEA](#)