

Features

Regulated Converters

- Reinforced Insulation for 250VAC Working Voltage
- Clearance and Creepage Distance: 8mm
- 5kVAC I/P to O/P 2MOPP Isolation
- 2µA Patient Leakage Current
- Industry Standard Pinout
- 2:1 and 4:1 Wide Input Range

RECOM
DC/DC Converter

REM6

6 Watt
2:1 & 4:1
DIP24
Single and Dual Output




Description

The REM6 series of medical grade regulated DC/DC converters features reinforced 5kVAC/1 minute isolation with low 2µA leakage and are 60601-1 3rd Ed. certified for 250VAC continuous working. The compact DIP24 package offers tightly regulated single and dual outputs, even under no-load conditions. The outputs are short circuit and overload protected. The converters are available in two different pinning options and optionally with an external control pin for standby consumption as low as 12.5mW. The converters are fully certified to CB, IEC/EN and ANSI/AAMI standards and carry the UL mark.

Selection Guide

Part Number	nom. Input Voltage ⁽¹⁾ [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. [%]	Max. Capacitive Load [µF]
REM6-xx3.3S/ ^(3,4)	5 / 12 / 24 / 48	3.3	1800	81.5 / 83.5 / 83 / 82.5	2100
REM6-xx05S/ ^(3,4)	5 / 12 / 24 / 48	5	1200	86 / 86 / 86 / 86.5	1500
REM6-xx12S/ ^(3,4)	5 / 12 / 24 / 48	12	500	86 / 89 / 89 / 88	260
REM6-xx15S/ ^(3,4)	5 / 12 / 24 / 48	15	400	87.5 / 88.5 / 88.5 / 88.5	210
REM6-xx24S/ ^(3,4)	5 / 12 / 24 / 48	24	250	87 / 88.5 / 88.5 / 88	75
REM6-xx05D/ ^(3,4)	5 / 12 / 24 / 48	±5	±600	84 / 85 / 85 / 85	±860
REM6-xx12D/ ^(3,4)	5 / 12 / 24 / 48	±12	±250	86.5 / 89 / 88.5 / 88	±150
REM6-xx15D/ ^(3,4)	5 / 12 / 24 / 48	±15	±200	87.5 / 88 / 88.5 / 87	±110
REM6-xx3.3SW/ ^(3,4)	24 / 48	3.3	1800	83 / 82.5	2100
REM6-xx05SW/ ^(3,4)	24 / 48	5	1200	86 / 86.5	1500
REM6-xx12SW/ ^(3,4)	24 / 48	12	500	89 / 88	260
REM6-xx15SW/ ^(3,4)	24 / 48	15	400	89 / 88.5	210
REM6-xx24SW/ ^(3,4)	24 / 48	24	250	88.5 / 88	75
REM6-xx05DW/ ^(3,4)	24 / 48	±5	±600	85 / 85	±860
REM6-xx12DW/ ^(3,4)	24 / 48	±12	±250	88.5 / 88	±150
REM6-xx15DW/ ^(3,4)	24 / 48	±15	±200	88.5 / 87	±110

Model Numbering

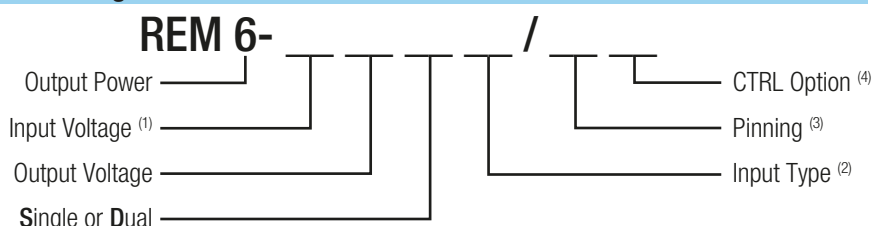

Notes:

Note1: for 4:1 Input Voltage Type add "W", see Note 2.

2:1	nom. Vin	4:1 "W"	nom. Vin
xx= 4.5-9 Vin	= "05"	xx= 9-36Vin	= "24"
xx= 9-18Vin	= "12"	xx= 18-75Vin	= "48"
xx= 18-36Vin	= "24"		
xx= 36-75Vin	= "48"		

Note2: Blank for Standard 2:1 Input Voltage Range; „W" suffix for 4:1 Input Voltage Range

Note3: „A" suffix for A pinning; „C" suffix for C pinning, for more details refer to Package Style and Pinning

Note4: „CTRL" suffix for control pin option, for A pinning only, for C pinning not available

Examples:

REM6-0512D/A	=	2:1 Input, 4.5-9Vin, ±12Vout,	pinout „A", without control pin
REM6-1215S/C	=	2:1 Input, 9-18Vin, 15Vout,	pinout „C", without control pin
REM6-4815SW/A/CTRL	=	4:1 Input, 36-75Vin, 15Vout,	pinout „A" with control pin
REM6-243.3SW/C	=	4:1 Input, 9-36Vin, 3.3Vout,	pinout „C", without control pin



2MOPP 250VAC

IEC-60601-1 Certified
ES-60601-1 Certified
EN-55011 Certified
EN-55022 Certified

Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)

BASIC CHARACTERISTICS



Parameter	Condition	Min.	Typ.	Max.
Absolute Maximum Input Voltage (3sec max.)	2:1 5Vin nom. 12Vin nom. 24Vin nom. 48Vin nom.			16VDC 25VDC 50VDC 100VDC
	4:1 24Vin nom. 48Vin nom.			50VDC 100VDC
Under Voltage Lockout	2:1 5Vin nom. 12Vin nom. 24Vin nom. 48Vin nom.	4VDC 8VDC 16VDC 33VDC		4.5VDC 9VDC 18VDC 36VDC
	4:1 24Vin nom. 48Vin nom.	8VDC 16VDC		9VDC 18VDC
Start-up Time	constant resistive load, Power up or Remote ON/OFF		30ms	
Remote ON/OFF (referenced to -Vin Pin)	DC-DC ON DC-DC OFF		Open or 0-1.2VDC 2.2-12VDC	
Current of CTRL Pin		-0.5mA		1mA
Remote OFF Input Current			2.5mA	
Internal Operating Frequency		225kHz	250kHz	275kHz
Output Ripple and Noise (20MHz BW limited)	10µF/25V X7R MLCC for 3.3, 5Vout 10µF/25V X7R MLCC for 12, 15Vout 4.7µF/50V X7R MLCC for 24Vout		30mVp-p 40mVp-p 50mVp-p	

Efficiency

Table1: Efficiency Crosstable

Efficiency Crosstable (%) @ full load		Input Voltage					
		5	12	24	48	24W	48W
Output Voltage	3.3S	81.5	83.5	83	82.5	83	82.5
	05S	86	86	86	86.5	86	86.5
	12S	86	89	89	88	89	88
	15S	87.5	88.5	89	88.5	89	88.5
	24S	87	88.5	88.5	88	88.5	88
	05D	84	85	85	85	85	85
	12D	86.5	89	88.5	88	88.5	88
	15D	87.5	88	88.5	87	88.5	87

Graph1: Efficiency Factor vs. Load

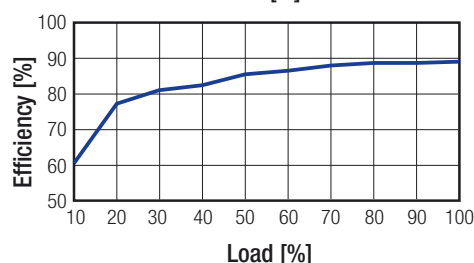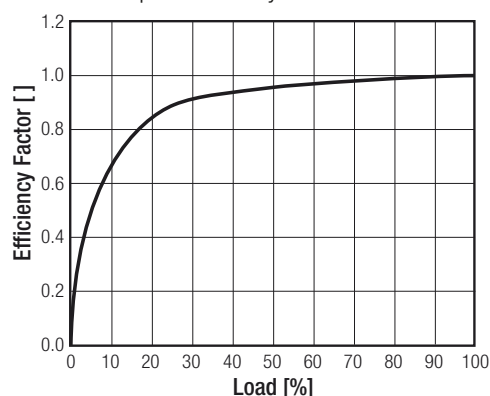

Calculation Example:

choose your model:

REM6-1212D

- Efficiency from Table1 (= 89% @ max Load / nom Vin)
- Loading conditions in application (e.g. 50%)
- use Eff factor from Graph1 (= 0.96 @50%)

Calculation:

Vin = 12V
Iout = 50%
Eff _{100%} = 89%
Eff _{factor50%} = 0.96
R _{th} = 18°C/W
T _{CASEmax} = 105°C

$$Eff_{50\%} = Eff_{100\%} * Eff_{factor50\%} = 89 * 0.96 = \underline{85.44\%}$$

$$P_{DIS50\%} = P_{In50\%} - P_{out50\%} = \frac{P_{out100\%} * 0.5}{Eff_{50\%}} - (P_{out100\%} * 0.5) = 3.51 - 3 = \underline{0.51W}$$

$$T_{OVER} = R_{th} * P_{DIS50\%} = 18 * 0.51 = \underline{9.2^{\circ}C}$$

$$T_{AMBmax} = T_{CASEmax} - T_{OVER} = 105 - 9.2 = \underline{95.8^{\circ}C}$$

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

REGULATIONS

Parameter	Condition	Type	Value
Output Accuracy			$\pm 1\%$
Line Regulation	low line to high line	Single Dual	$\pm 0.2\%$ $\pm 0.5\%$
Load Regulation	no load to full load	Single Dual	$\pm 0.2\%$ $\pm 1\%$
Cross Regulation	asymmetrical load 25% / Full Load	only Dual Output	$\pm 5\%$
Transient Response	25% load step change		250 μs

PROTECTIONS

Parameter	Condition	Type	Value
Short Circuit Protection (SCP)			continuous, auto-recovery
Over Load Protection (OLP)	% of Iout rated		Hiccup mode, 150% typ.
Output Over Voltage Protection (OVP)		3.3Vout	3.7VDC min. / 5VDC max.
		5Vout	5.6VDC min. / 7VDC max.
		Single 12Vout	13.5VDC min. / 16VDC max.
		15Vout	18.3VDC min. / 22VDC max.
		24Vout	29.1VDC min. / 34.5VDC max.
		Dual 5Vout	5.6VDC min. / 7VDC max.
		12Vout	13.5VDC min. / 18.2VDC max.
		15Vout	17VDC min. / 22VDC max.
Isolation Voltage	I/P to O/P working voltage		5kVAC / 1 minute 250VAC / continuous
Means of Protection			2MOPP
Leakage Current	240VAC, 60Hz		2 μA
Medical Device Classification			Type CF applied device (design to meet)
Internal Clearance	I/P to O/P		8mm
Creepage			8mm
External Clearance and Creepage	I/P to O/P	Single	>19.72mm
		Dual	>14.64mm
Isolation Capacitance			12pF typ. / 17pF max.
Insulation Grade			Reinforced Insulation

Notes:

Note5: This Power module is not internally fused. A input line fuse must be always used.

Recommended Fuse:


2:1 Input Voltage	Fuse (slow blow)
5V	T2.5A
12V	T1.25A
24V	T0.63A
48V	T0.315A

4:1 Input Voltage	Fuse (slow blow)
24V	T1.25A
48V	T0.63A

ENVIRONMENTAL

Parameter	Condition	Value
Operating Humidity		5% to 95% RH
Temperature Coefficient		$\pm 0.02\%$ / $^\circ\text{C}$
Thermal Impedance	natural convection (20LFM)	18 $^\circ\text{C}$ / W
max. Case Temperature Range		-40 $^\circ\text{C}$ to +105 $^\circ\text{C}$
max. Ambient Temperature Range		see calculation example
MTBF (+25 $^\circ\text{C}$)	according to MIL-HDBK-217F, full load	4718 x 10 ³ hours

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)




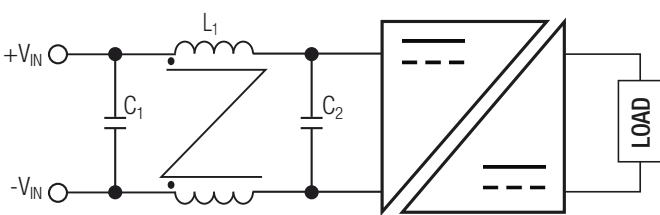
SAFETY AND CERTIFICATIONS																		
Certificate Type (Safety)	Report / File Number	Standard																
CB Medical Safety	E314885-A6 1409015	IEC-60601-1 Medical Report + ISO14971 Risk Assessment																
ANSI/AAMI	E314885-A6	ES60601-1																
CAN/CSA Medical	E314885-A6	C22.2 No. 60601-1:08																
Certificate Type (Others)	Conditions	Standard / Criterion																
EMI Standard ⁽⁷⁾	Conducted	EN55011 (EN-55022), Class A, B																
	Radiated	EN55011 (EN-55022), Class A, B																
	Conducted and Radiated	FCC18																
ESD	Air ±8kV; Contact ±6kV	EN61000-4-2, Criteria A																
Radiated Immunity	10V/m	EN61000-4-3, Criteria A																
Fast Transient ⁽⁶⁾	±2kV	EN61000-4-4, Criteria A																
Surge ⁽⁶⁾	±2kV	EN61000-4-5, Criteria A																
Conducted Immunity	20Vr.m.s	EN61000-4-6, Criteria A																
Power Frequency Magnetic Field	10A/m	EN61000-4-8, Criteria A																
Thermal Shock		MIL-STD-810F																
Vibration		MIL-STD-810F																
Notes:																		
Note6: An external input filter capacitor is required if the model has to meet EN61000-4-4 or/and EN61000-4-5.																		
Recommended components: 5Vin aluminium capacitor (Nippon Chemi-con KY series, 1000µF/25V) and a reverse diode (Vishay V10P45) to connect in parallel 12Vin, 24Vin aluminium capacitor (Nippon Chemi-con KY series, 470µF/50V) 48Vin aluminium capacitor (Nippon Chemi-con KY series, 330µF/100V)																		
Note7: The whole REM6 series can meet EMI Class A with no external filter. And Class B only with external components.																		
EMC Filter Suggestion for Class B																		
 <table><tr><th>MODEL</th><th>C1 ⁽⁸⁾</th><th>C2 ⁽⁸⁾</th><th>L1 ⁽⁸⁾</th></tr><tr><td>REM6-05xxS_D</td><td>22µF/16V MLCC</td><td>22µF/16V MLCC</td><td>137µH CMC</td></tr><tr><td>REM6-12xxS_D REM6-24xxS_D REM6-24xxS_D/W</td><td>4.7µF/50V MLCC</td><td>4.7µF/50V MLCC</td><td>227µH CMC</td></tr><tr><td>REM6-48xxS_D REM6-48xxS_D/W</td><td>2.2µF/100V MLCC</td><td>1µF/100V MLCC</td><td>419µH CMC</td></tr></table>			MODEL	C1 ⁽⁸⁾	C2 ⁽⁸⁾	L1 ⁽⁸⁾	REM6-05xxS_D	22µF/16V MLCC	22µF/16V MLCC	137µH CMC	REM6-12xxS_D REM6-24xxS_D REM6-24xxS_D/W	4.7µF/50V MLCC	4.7µF/50V MLCC	227µH CMC	REM6-48xxS_D REM6-48xxS_D/W	2.2µF/100V MLCC	1µF/100V MLCC	419µH CMC
MODEL	C1 ⁽⁸⁾	C2 ⁽⁸⁾	L1 ⁽⁸⁾															
REM6-05xxS_D	22µF/16V MLCC	22µF/16V MLCC	137µH CMC															
REM6-12xxS_D REM6-24xxS_D REM6-24xxS_D/W	4.7µF/50V MLCC	4.7µF/50V MLCC	227µH CMC															
REM6-48xxS_D REM6-48xxS_D/W	2.2µF/100V MLCC	1µF/100V MLCC	419µH CMC															
Notes:																		
Note8: The component values can be adapted according to customers' applictation.																		

DIMENSION and PHYSICAL CHARACTERISTICS		
Parameter	Type	Value
Material	Case Potting	non-conductive black plastic silicone (UL94-V0)
Package Dimension (LxWxH)		31.80 x 20.30 x 10.40mm
Package Weight		14g
continued on next page		

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Dimension Drawing (mm)


“C” Pinning



Pin Connections



Pin #	Single	Dual
1	+Vin	+Vin
11	No Pin	Com
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

Tolerance: xx.x= $\pm 0.5\text{mm}$
xx.xx= $\pm 0.25\text{mm}$



Bottom View

“A” Pinning (Standard)




Pin Connections

Pin #	Single	Dual
1	CTRL*	CTRL*
2	-Vin	-Vin
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
22	+Vin	+Vin
23	+Vin	+Vin

* If don't choose CTRL option, there is no pin on the corresponding pin number

NC= not connected
Tolerance: xx.x= $\pm 0.5\text{mm}$
xx.xx= $\pm 0.25\text{mm}$




Bottom View

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	Tube	255 x 21.8 x 16.5mm
Packaging Quantity		7pcs
Storage Temperature Range		-55°C to +125°C

Tube Dimension Drawing (mm)

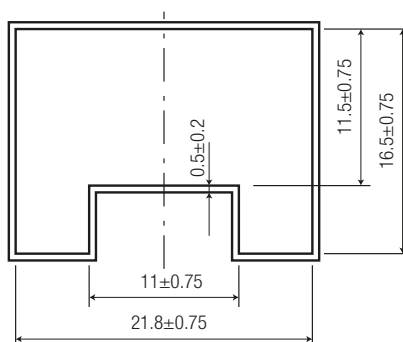

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[REM6-2412SW/A](#) [REM6-2415DW/A/CTRL](#) [REM6-1224S/C](#) [REM6-4805SW/A/CTRL](#) [REM6-2405D/C](#) [REM6-1212D/A/CTRL](#) [REM6-2405SW/A/CTRL](#) [REM6-4824SW/C](#) [REM6-483.3SW/A/CTRL](#) [REM6-4815DW/A/CTRL](#) [REM6-4805DW/A](#) [REM6-2415DW/A](#) [REM6-1224S/A](#) [REM6-2412D/A](#) [REM6-2415D/A](#) [REM6-2424SW/A/CTRL](#) [REM6-4805DW/A/CTRL](#) [REM6-4815DW/A](#) [REM6-4815D/A](#) [REM6-4815S/A/CTRL](#) [REM6-0524S/A/CTRL](#) [REM6-2405S/A/CTRL](#) [REM6-1205D/A](#) [REM6-2424S/C](#) [REM6-0505D/A/CTRL](#) [REM6-2405D/A/CTRL](#) [REM6-0512D/A/CTRL](#) [REM6-4815D/A/CTRL](#) [REM6-1205S/A](#) [REM6-2415D/C](#) [REM6-2405SW/A](#) [REM6-4812SW/A/CTRL](#) [REM6-1212D/C](#) [REM6-1215D/C](#) [REM6-2405SW/C](#) [REM6-4824SW/A](#) [REM6-4824S/A](#) [REM6-2412D/C](#) [REM6-1215D/A/CTRL](#) [REM6-2405S/A](#) [REM6-1205D/A/CTRL](#) [REM6-053.3S/A/CTRL](#) [REM6-243.3S/A/CTRL](#) [REM6-0512S/C](#) [REM6-4824S/C](#) [REM6-2415S/C](#) [REM6-1215S/A/CTRL](#) [REM6-2424S/A/CTRL](#) [REM6-2415S/A](#) [REM6-123.3S/A](#) [REM6-4805S/A/CTRL](#) [REM6-483.3S/A](#) [REM6-483.3S/C](#) [REM6-0505S/C](#) [REM6-2412D/A/CTRL](#) [REM6-0524S/C](#) [REM6-1224S/A/CTRL](#) [REM6-123.3S/C](#) [REM6-1215S/A](#) [REM6-053.3S/C](#) [REM6-243.3SW/A](#) [REM6-1212S/C](#) [REM6-0515S/C](#) [REM6-4812DW/A/CTRL](#) [REM6-4805D/A/CTRL](#) [REM6-0512D/C](#) [REM6-1212D/A](#) [REM6-1212S/A](#) [REM6-4805D/C](#) [REM6-2415SW/A/CTRL](#) [REM6-2415DW/C](#) [REM6-4815DW/C](#) [REM6-4812S/A/CTRL](#) [REM6-243.3SW/C](#) [REM6-483.3SW/A](#) [REM6-4805SW/C](#) [REM6-2412SW/C](#) [REM6-2412S/A](#) [REM6-2405D/A](#) [REM6-4824SW/A/CTRL](#) [REM6-0512S/A/CTRL](#) [REM6-2415SW/C](#) [REM6-4805DW/C](#) [REM6-4812S/A](#) [REM6-0512D/A](#) [REM6-0515D/A/CTRL](#) [REM6-0515D/A](#) [REM6-4815SW/C](#) [REM6-0505S/A](#) [REM6-2415D/A/CTRL](#) [REM6-4812S/C](#) [REM6-4815S/A](#) [REM6-0512S/A](#) [REM6-4815S/C](#) [REM6-4812D/A/CTRL](#) [REM6-4812D/C](#) [REM6-243.3S/C](#) [REM6-1215S/C](#) [REM6-0505S/A/CTRL](#) [REM6-123.3S/A/CTRL](#)