

Raychem Corporation

300 Constitution Drive
Menlo Park, CA 94025
800-227-4856
FAX 800-227-4866

R PolySwitch® PTC Devices Resettable Fuse

PRODUCT: RGE900K

DOCUMENT: SCD 23830
PCN: 168041
REV LETTER: D
REV DATE: NOVEMBER 8, 1998
PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 16V MAX

Current: 100A MAX

Insulating Material:

Cured, Flame Retarded Epoxy Polymer
meets UL94 V-0 Requirements

Lead Material:

20 AWG Tin/Lead Plated Copper
(0.81mm [0.032] nom. diameter)

Marking:

Raychem Logo and Voltage
XX 16
G 900 Part Identification
□□□□ Lot Identification (can be on back)

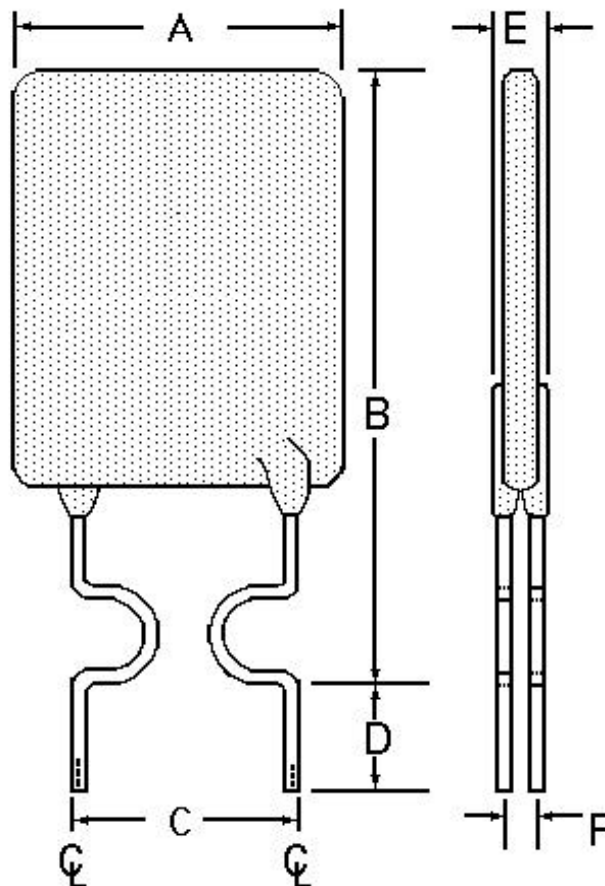


TABLE I. DIMENSIONS:

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	13.0	14.0	-	24.3	4.3	5.8	7.6	-	2.0	3.0	1.2
in*:	(0.51)	(0.55)	-	(0.96)	(0.17)	(0.23)	(0.30)	-	(0.08)	(0.12)	(0.05)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS						TIME TO TRIP	RESISTANCE		TRIPPED-STATE POWER DISSIPATION
AMPS 25°C HOLD	AMPS AT 0°C HOLD	AMPS AT 25°C TRIP	AMPS AT 60°C HOLD	AMPS AT 60°C TRIP	AMPS AT 60°C HOLD	AMPS AT 60°C TRIP	SECONDS AT 25°C, 45 A MAX	OHMS AT 25°C MIN	OHMS AT 25°C MAX	WATTS AT 25°C, 16V TYP
9.00	-	-	9.0	15.3	-	-	12.0	0.004	0.015	3.3

Recognition:

CSA/ TUV/ UL approved.

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.