


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AA	22				K	OBS:6/3;EC 0502-0843-97	20MAY98	05 EL

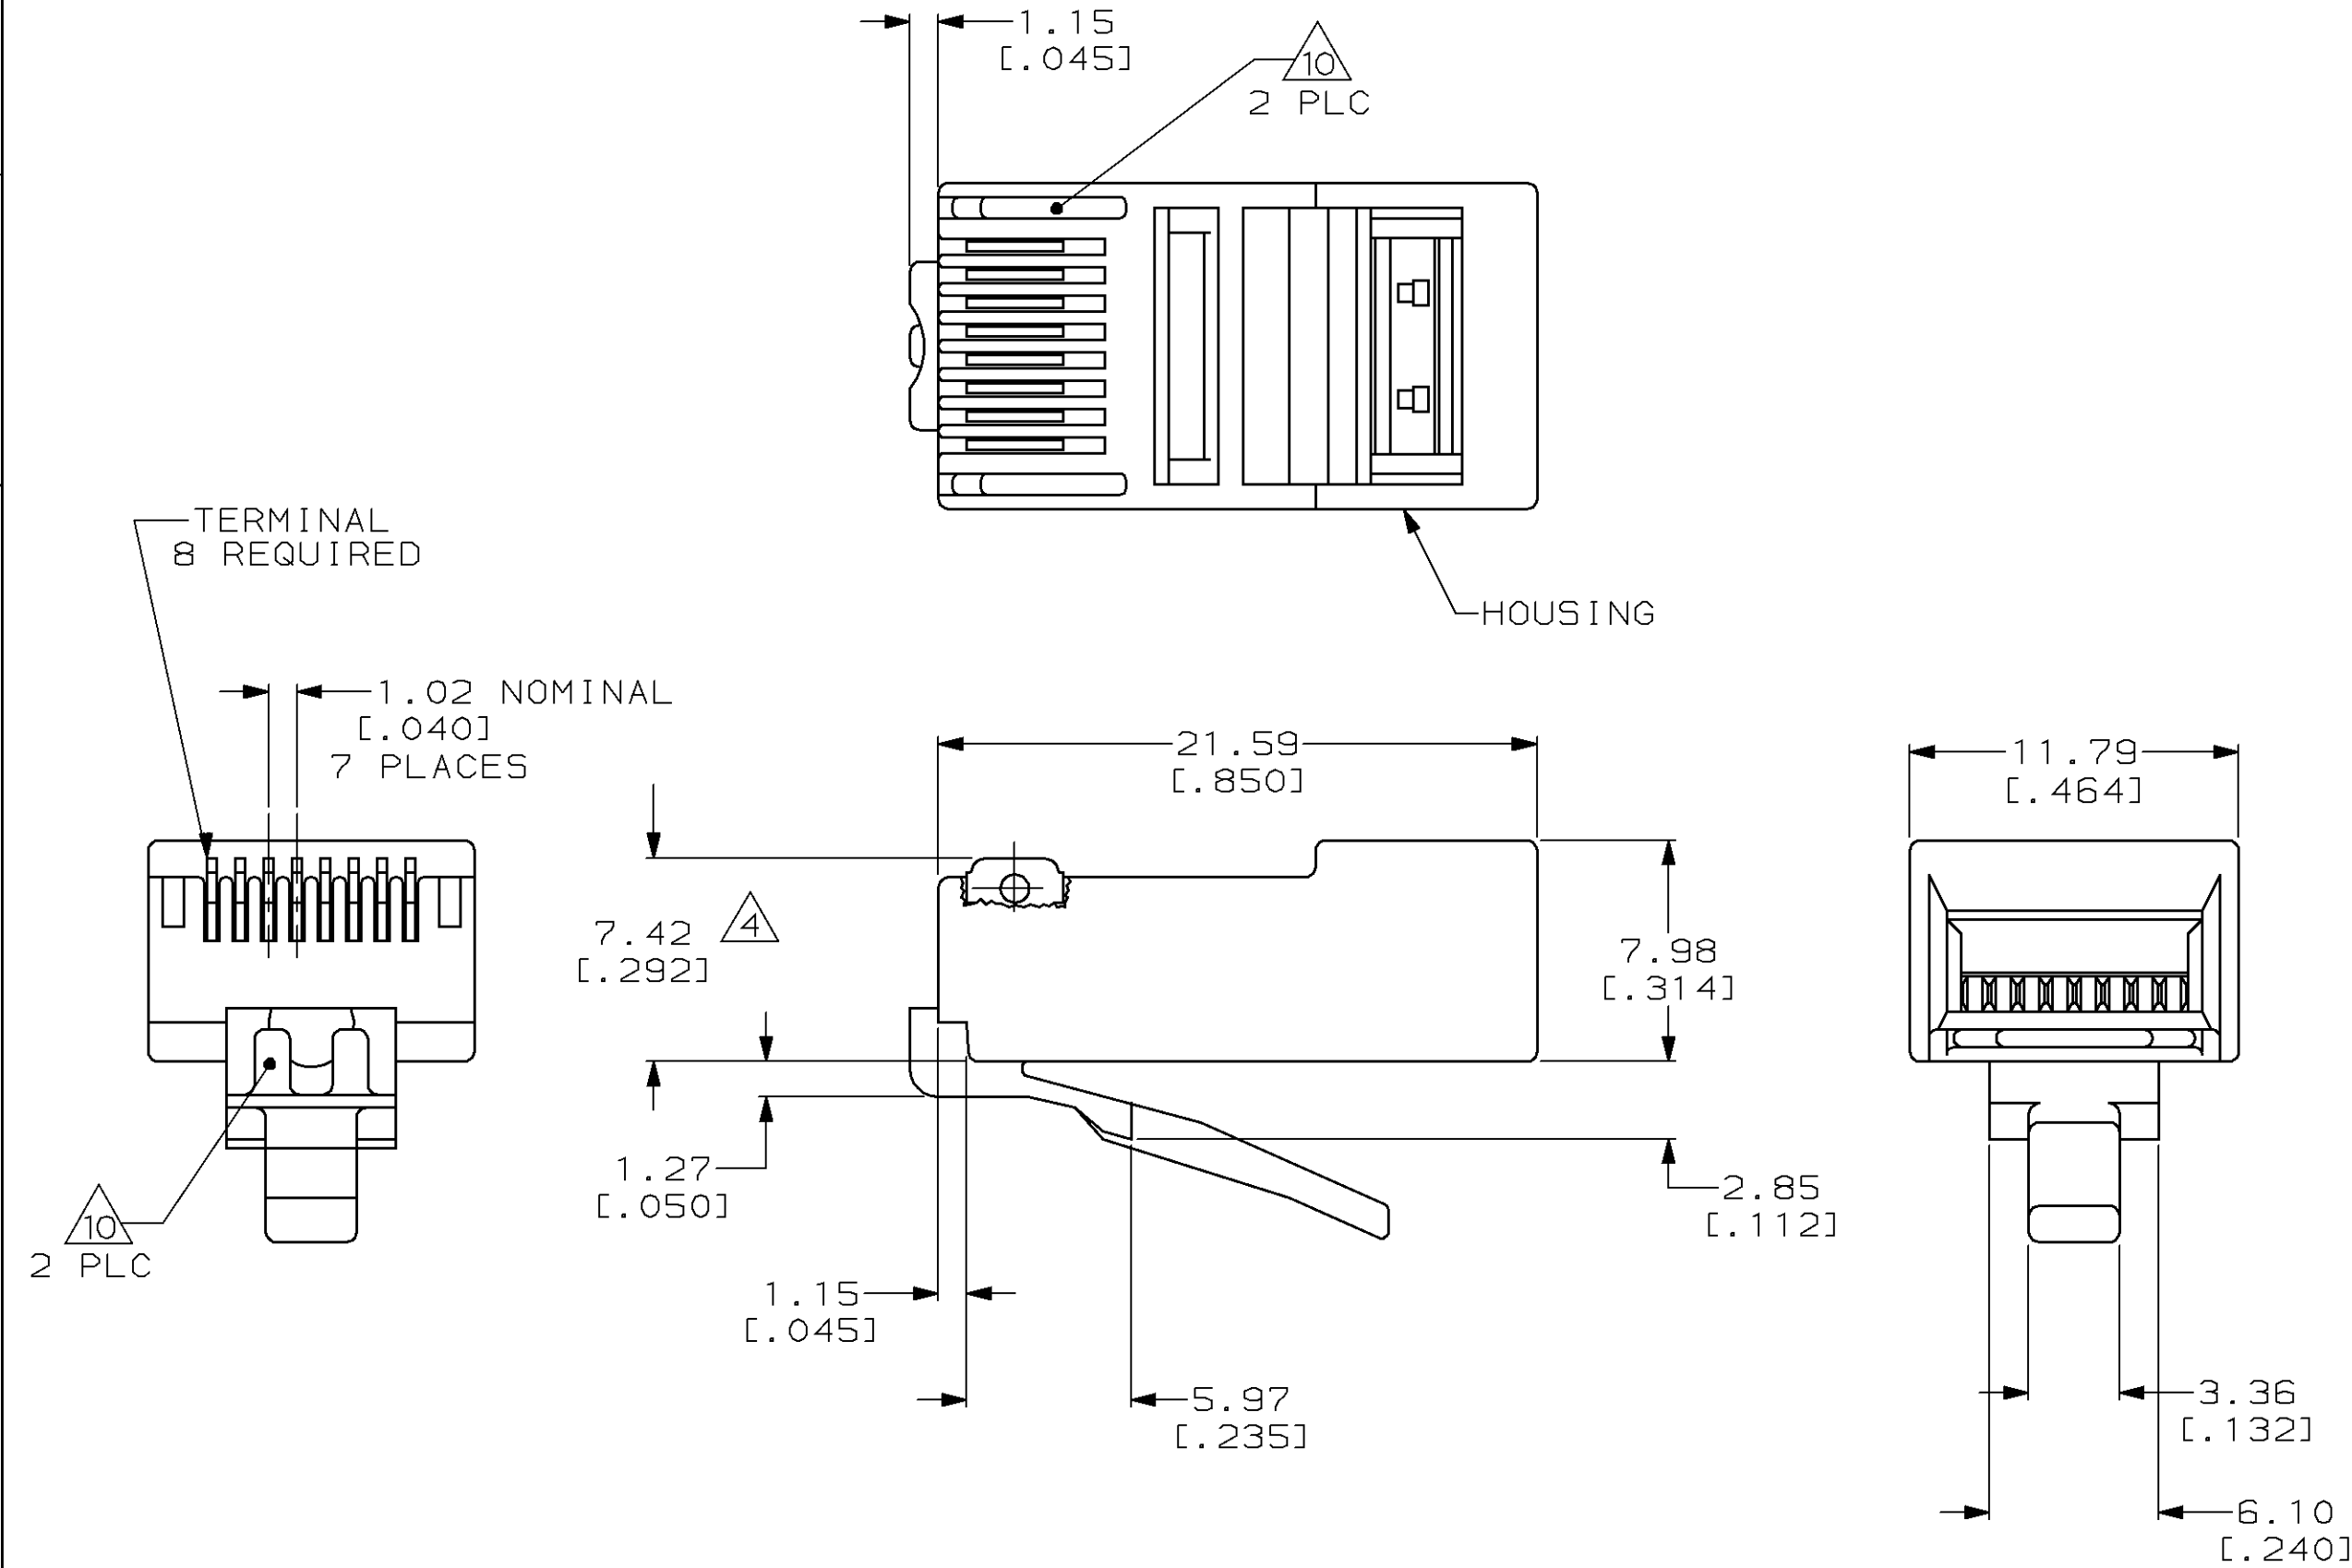

- 1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL: HOUSING-POLYCARBONATE, CLEAR. TERMINAL-0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27 μ m[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA. GOLD FLASH OVER THE REMAINDER, OVER 2.54 μ m[.000100] THICK NICKEL UNDERPLATE.
- 3 PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.89-0.99[.035-.039] AND A MAXIMUM OVAL CABLE JACKET OF 2.54 X 8.89[.100 X .350].
- 4 TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 6 PACKAGED 10,000 ASSEMBLIES PER CARTON.
- 7 PACKAGED 500 ASSEMBLIES PER CARTON.
- 8 PACKAGED 100 ASSEMBLIES PER BOX, 10 BOXES PER CARTON.
- 9 PACKAGED 25 ASSEMBLIES PER POLYBAG, 40 POLYBAGS PER CARTON.
- 10 REELED PRODUCT ON STRIP DOES NOT HAVE VOID CORING ILLUSTRATED ON THIS DRAWING.

9 3	5-554720-4
8 3	5-554720-3
7 3	5-554720-2
6 3	5-554720-1
REELED 3 10	554720-1

PACKAGED		PART NO	
AMP AMP Incorporated Harrisburg, PA 17105-3608			
MODULAR PLUG ASSEMBLY, 8 POSITION, SOLID WIRE			
CAGE CODE		DRAWING NO	
00779		C-554720	
4:1		SHEET 1 OF 1	

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 3 PLC DEC ± ANGLES ±	DR 8-26-93 S.MAYBERRY	AMP Incorporated Harrisburg, PA 17105-3608
	CHK 9-15-93 C.WHITT	
MATERIAL	APPD 9-20-93 J.TONEY	
	APPD 9-20-93 H.MCGRATH	
FINISH	PRODUCT SPEC 108-1163	
	APPLICATION SPEC 114-6016	
	WEIGHT	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.