REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	06/01/11	LCHAN



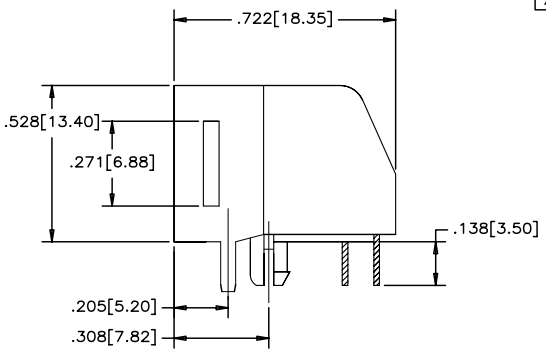

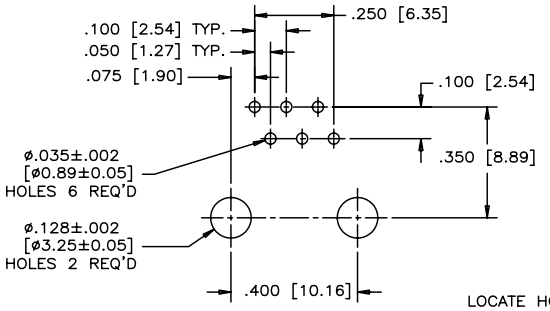

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
⌖ Ø.005[0.13]
HOLE POSITIONS
ARE BASIC

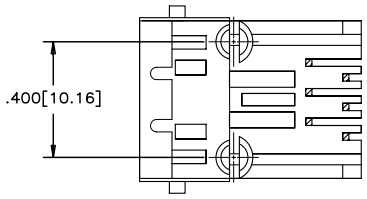

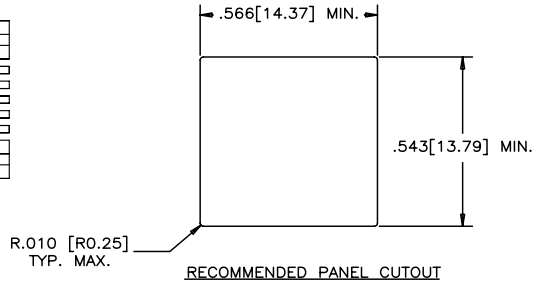

RECOMMENDED PANEL CUTOUT

NOTES:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, FLAMMABILITY RATING UL94V–0. COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE.
PLATING: GOLD PLATING (REFER TO PART NUMBER FOR THICKNESS ON MATING SURFACES)
50 u"[1.27 MICRONS]MIN. NICKEL UNDERPLATE.
100 u"[2.54 MICRONS] MIN. MATTE TIN OR GOLD FLASH ON CONTACT TAILS.

SHIELD: COPPER ALLOY, NICKEL PLATED.

AMPHENOL PART NUMBER: RJE03–166–2X20

1 = 06 µ" GOLD
2 = 15 µ" GOLD
3 = 30 µ" GOLD
4 = 50 µ" GOLD

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN Chigow	DATE 06/01/11	Amphenol Canada Corp.
DESIGNED		
CHECKED PAULW	06/01/11	TITLE: MODULAR JACK, PARTIAL SHIELD 6 POSITIONS, 6 CONTACTS (WITH SIDE FLANGES)–RoHS COMPLIANT
I. E. APPRD.		
Q. A. APPRD.		
DWG. APPRD.		DWG DRAWING NO. P–RJE03–166–2X20 REV. A
ENG. REL. NO.		
REF.		
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	SCALE WT. ——— SURF. ——— SHEET 1 OF 1

Downloaded from Elcodis.com electronic components distributor