



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
B		PROPOSAL	MAY 12,05	L.CHAN
C		CHNAGE 11.81 TO 11.43 PER ACTUAL PART	OCT29/12	L.CHAN

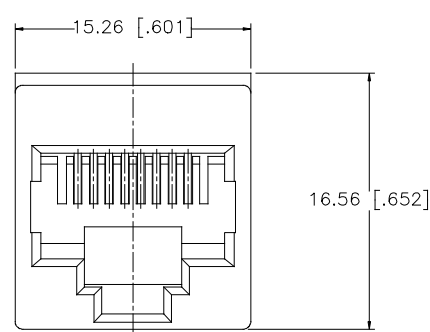

FRONT VIEW

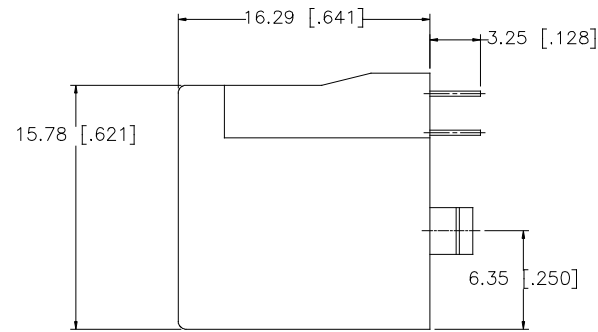

SIDE VIEW



1. MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOR: BLACK

CONTACTS:

PHOSPHOR BRONZE
PLATING: REFER TO PART NUMBER FOR GOLD
THICKNESS ON MATING SURFACES.
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ " [2.54 MICRONS]
MIN. MATTE TIN OR GOLD FLASH
ON CONTACT TAILS.

2. MECHANICAL:


MATING FORCE: 5.0 LBS MAX.

3. ELECTRICAL:

CONTACT RESISTANCE: 40 MILLIOHMS MAXIMUM
INSULATION RESISTANCE: 500 MEGOHMS MINIMUM
CURRENT RATING: 1.5 AMPS
VOLTAGE RATING: 125 VOLTS AC

4. ENVIRONMENTAL:

STORAGE TEMPERATURE: -20°C to 85°C
PACKAGING METHOD: TRAY PACKAGING

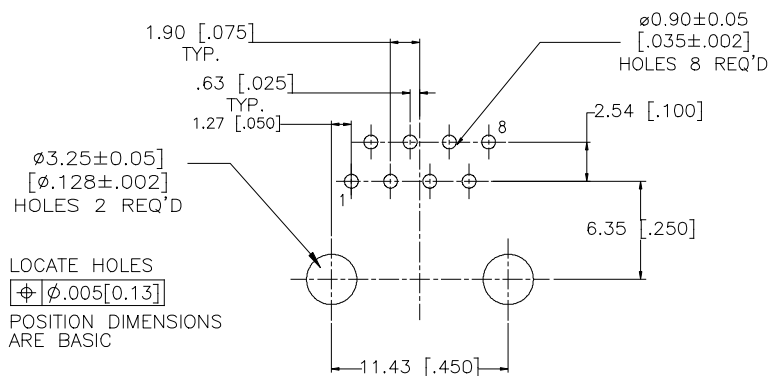

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

PART NUMBER: RJE08-188-0X10

GOLD PLATING:

1 = 6 μ "
2 = 15 μ "
3 = 30 μ "
4 = 50 μ "

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN PAULW	DATE 05/12/05	Amphenol Canada Corp.		
DESIGNED				
CHECKED CHIGOW	05/12/05	TITLE MODULAR JACK, TOP ENTRY, 8 POSITION, 8 CONTACTS, WITHOUT FLANGE, UNSHIELDED, - RoHS COMPLIANT		
I. E. APPRD.				
Q. A. APPRD.				
DWG. APPRD.				
ENG. REL. NO.		DWG	DRAWING NO.	REV.
REF.			P-RJE08-188-0X10	C
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. Q3554	SCALE	WT. -----	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RJE08-188-0110H](#) [RJE08-188-0210](#) [RJE08-188-0210H](#) [RJE08-188-0310H](#) [RJE08-188-0410](#) [RJE08-188-0410H](#)
[RJE08-188-0110](#)