
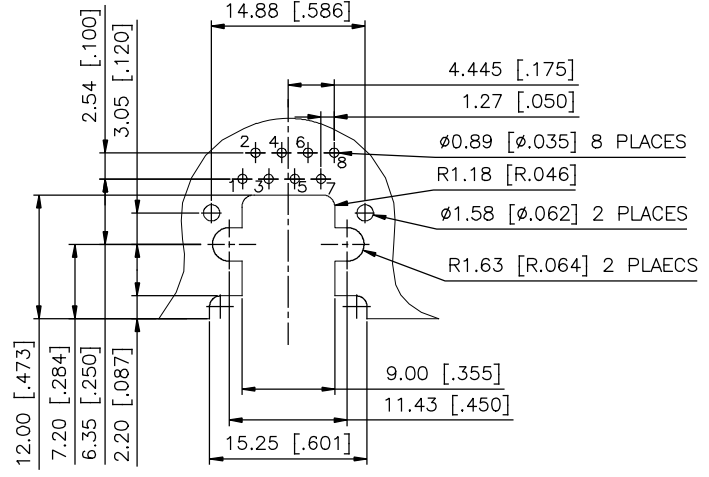
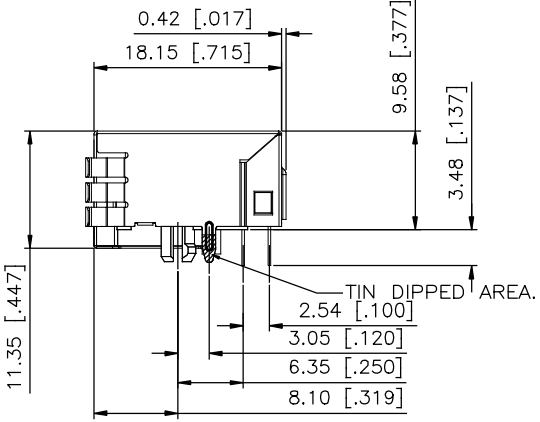


REVISIONS				
REV	ECN, ERN NO.	DATE	REV.BY	APPRD.
A	PROPOSAL PER ECN E07035	FEB 27/07		L.Chan
J	PROPOSAL	Jan 30,08		L.Chan
K	ADD TIN DIPPED ON SHIELD TAIL	SEP 20,2012		L.Chan

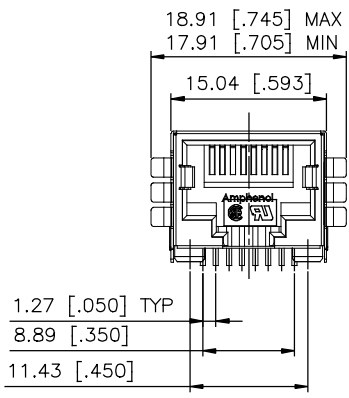

RECOMMENDED P.C.B. LAYOUT

AMPHENOL PART NUMBER: RJULE-4X182-01

- CONTACT PLATING CODE
- 0 = GOLD FLASH
 - 1 = 15u"
 - 2 = 30u"
 - 3 = 50u"




NOTES:

MATERIALS:


HOUSING: HIGH TEMPERATURE THERMOPLASTIC.
FLAMMABILITY RATING UL 94V-0
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING ON MATING SURFACES.
SEE PART NUMBER SYSTEM OPTION
50 u" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100 u" [2.54 MICRONS] MIN. MATTE TIN ON
SOLDER AREA.

SHELL: BRASS
NICKEL PLATING WITH TIN DIPPED ON PCB TAIL.

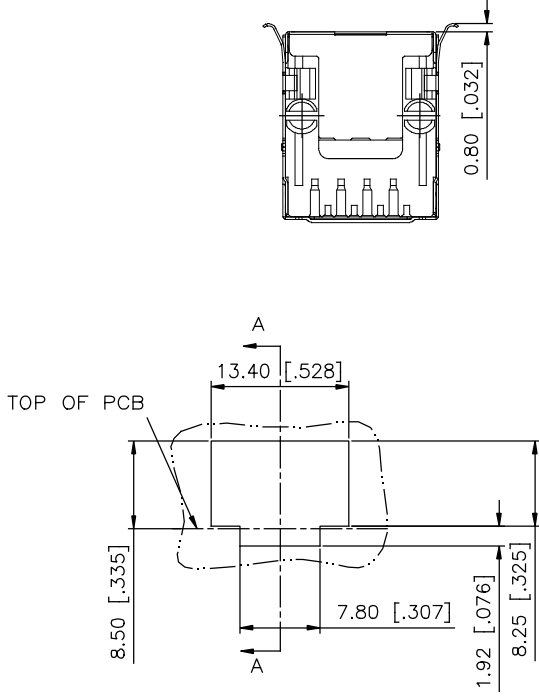

RECOMMENDED PANEL CUTOUT

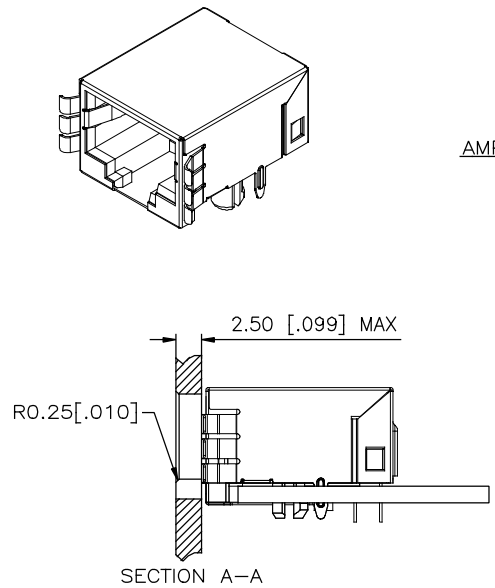

SIDE VIEW SHOWING JACK
RELATION TO PANEL

UNLESS OTHERWISE SOECIFIED DIMENSION ARE IN mm TOLERANCE ARE : .X ±0.50 .XX ±0.30	DRAWN <i>Jack Wang</i>		DATE FEB 27/07		Amphenol Canada Corp.						
	DESIGNED										
	CHECKED <i>MT.Chen</i>		FEB 27/07		TITLE RJ ULTRA LOW PROFILE MODULAR JACK 8 POSITIONS,8 CONTACTS, SHIELD WITH REAR PANEL MOUNT TABS. WITHOUT FLANGE—RoHS COMPLIANT						
	I. E. APPRD. <i>YM Lee</i>		FEB 27/07								
	Q. A. APPRD.										
	DWG. APPRD.										
	ENG. REL. NO.				DWG		DRAWING NO. P— RJULE—4X182—01		REV. K		
	REF.										
DIMENSIONS ARE IN		CODE ID. NO.		SCALE 1:1		WT. _____		SURF. _____		SHEET 1 OF 1	
mm[INCHES]											

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.