

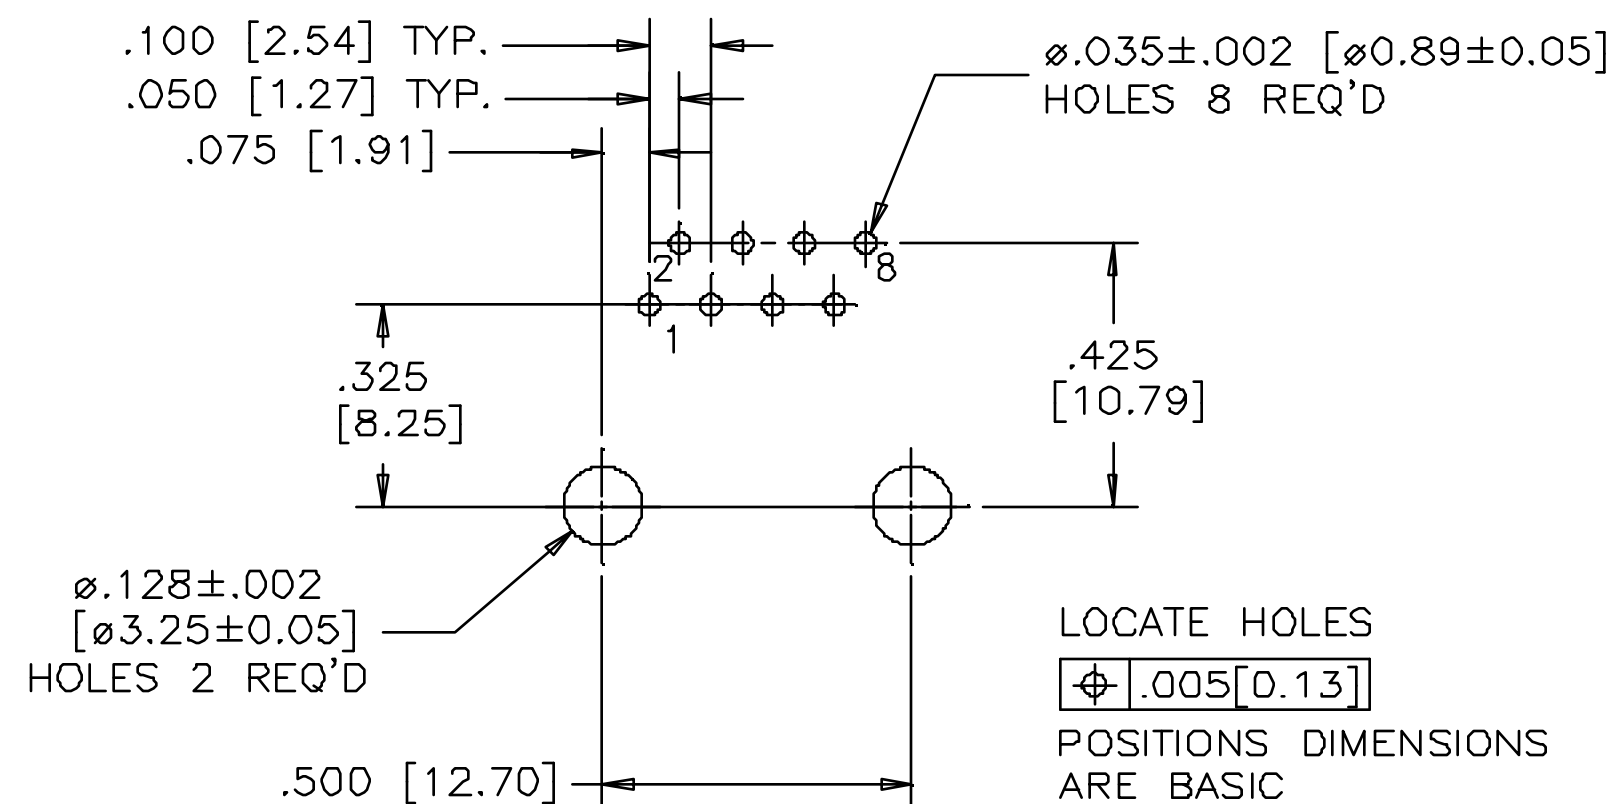
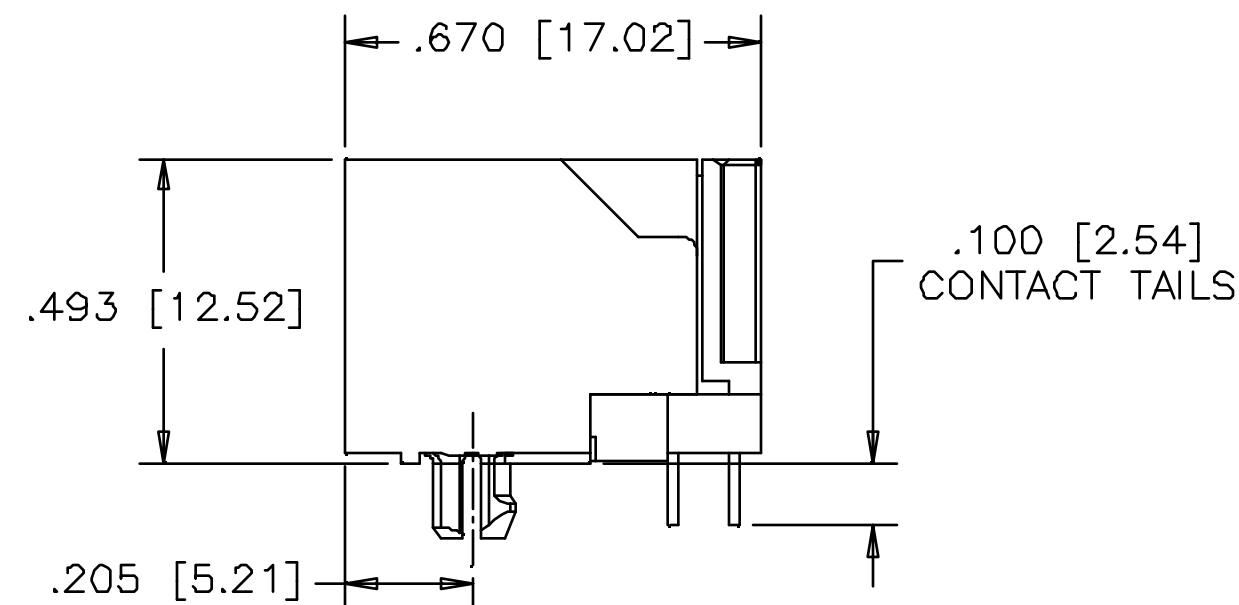


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR.06/2016	L.CHAN

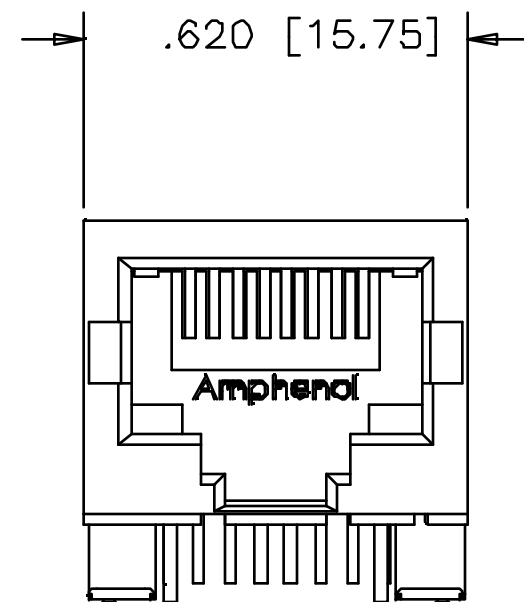

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

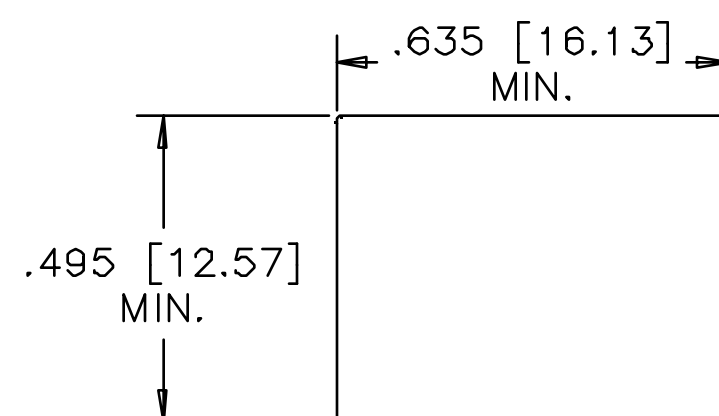

RECOMMENDED PANEL CUTOUT
SCALE 1:1



MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOR - BLACK.

CONTACTS: PHOSPHOR BRONZE
PLATING: 50 MICRO" MIN GOLD PLATED ON MATING AREAS.
50 MICRO" MIN. NICKEL OVERALL.
100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 260°C MAXIMUM FOR 10
SECOND MAXIMUM.

PART NO.: RJSBE-5080-C1

UNLESS SPECIFIED OTHERWISE		DRAWN JACK.GUO	APR.06/16	Amphenol Canada Corp. www.amphenolcanada.com	
PRIMARY UNITS INCHES	CHECKED				
SECONDARY MILLIMETERS	M.E. APP'D			SINGLE PORT MODULAR JACK, 8 POSITION, 8 CONTACTS, UNSHIELDED 50u" GOLD PLATING, WITHOUT LED, - RoHS COMPLIANT	
REFERENCE IN PARENTHESES	Q.A. APP'D				
1 DECIMAL PLACE 2 DECIMAL PLACES 3 DECIMAL PLACES ±0.015 ANGULAR DEGREES	DWG APP'D L.CHAN	APR.06/16		DWG NO. P-RJSBE-5080-C1	
	ENG. REL. NO.			REV A	
	REF.				
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		CODE ID NO. 03554	DWG SIZE
				SCALE	SHEET 1 OF 1