
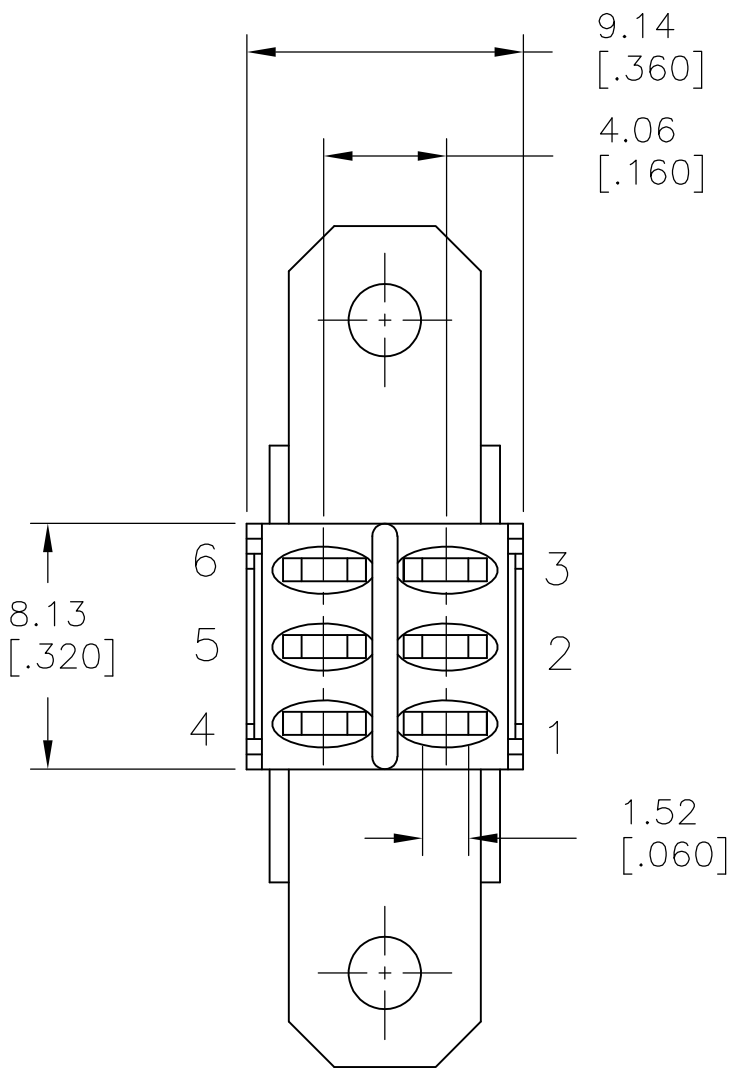
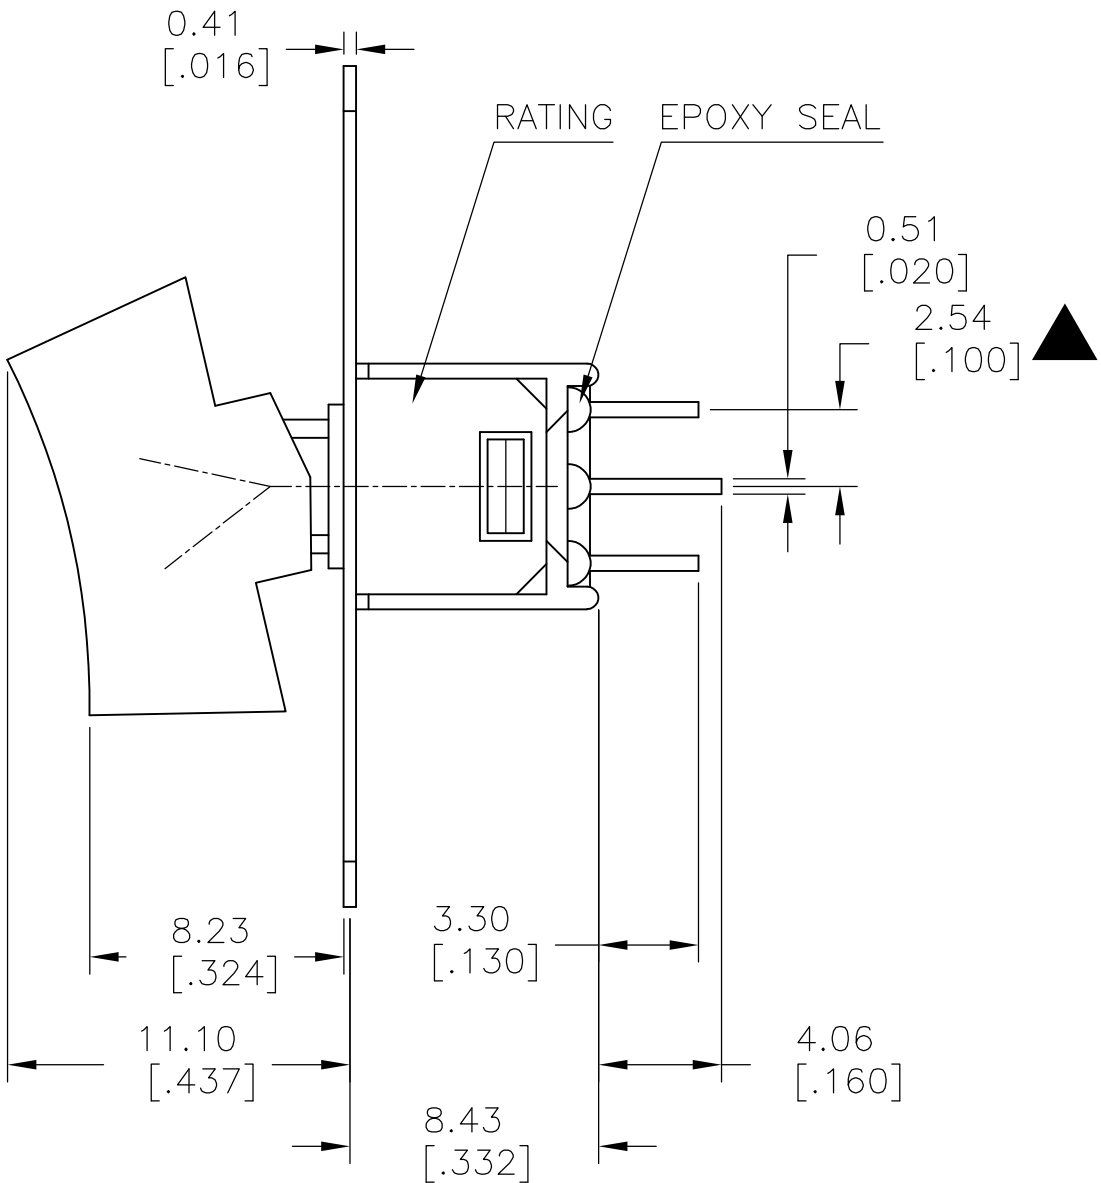


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
-	-	A		NEW DRAWING PER ECO-14-009318		11JUL2014	RH

SPECIFICATIONS

- MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC
100mA FOR SILVER PLATED CONTACTS.
- CONTACT RATING: 3 Amps @120 VAC OR 28 VDC
1 Amp @ 250 VAC
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 1,000 Vrms MIN.@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

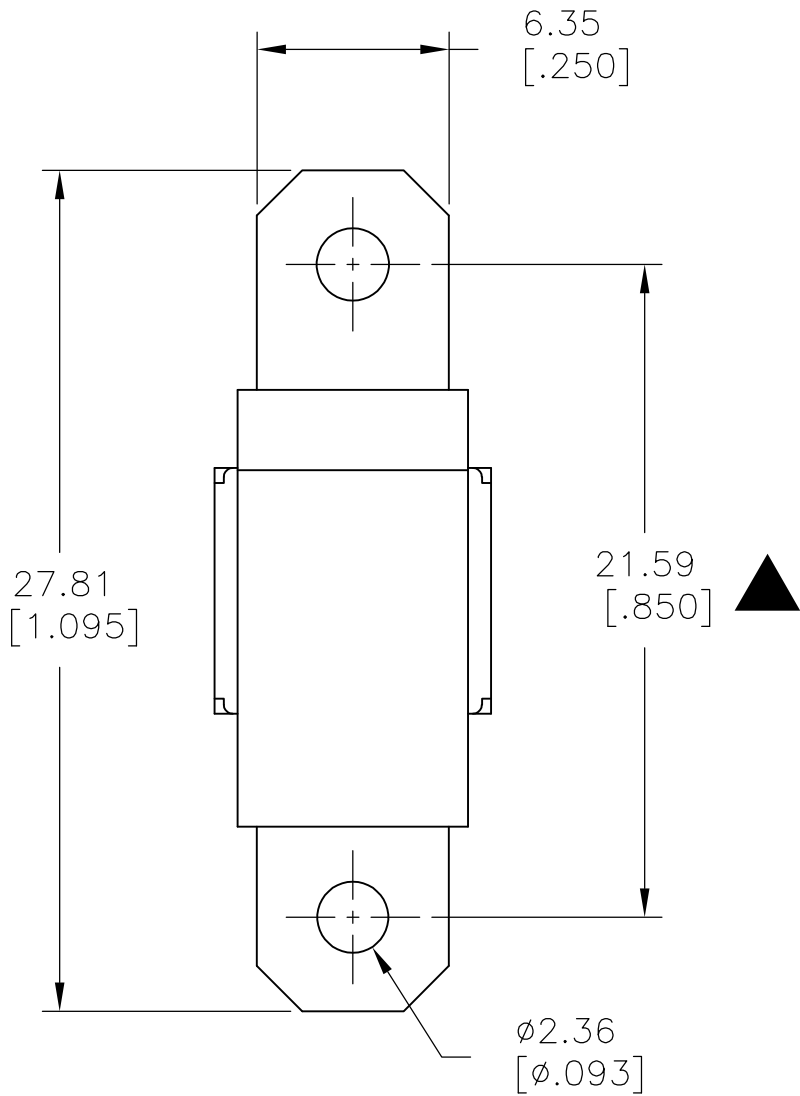

SILVER	2-1,5-4	2-3,5-6	ON-ON	V-BRACKET	VERTICAL	2	2	RMD1R102VS2QES	2267087-8
SILVER	2-1	2-3	ON-ON	V-BRACKET	VERTICAL	1	2	RMS1R102VS2QES	2267087-7
SILVER	2-1,5-4	2-3,5-6	ON-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	2	2	RMD1R102M7QES	2267087-6
SILVER	2-1	2-3	ON-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	1	2	RMS1R102M7QES	2267087-5
SILVER	2-1,5-4	2-3,5-6	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	2	2	RMD1R102M6QES	2267087-4
SILVER	2-1	2-3	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	1	2	RMS1R202M6QES	2267087-3
SILVER	2-1,5-4	2-3,5-6	ON-ON	SOLDER LUG	VERTICAL	2	2	RMD1R102M1QES	2267087-2
SILVER	2-1	2-3	ON-ON	SOLDER LUG	VERTICAL	1	2	RMS1R102M1QES	2267087-1
CONTACT MATERIAL	POS 2	POS 1	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN

D



C

C



C

C

C

226/087

B

B



B



B

B

B





A

A

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

D

C

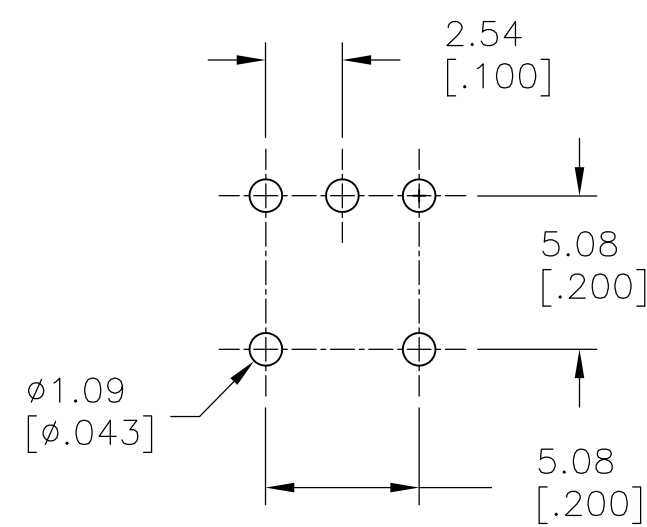
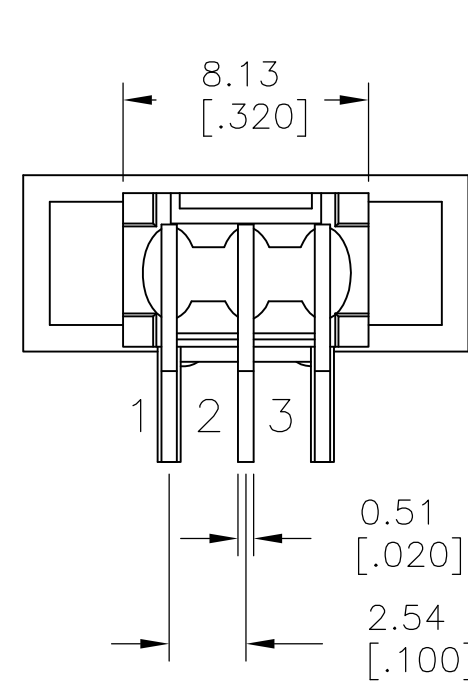
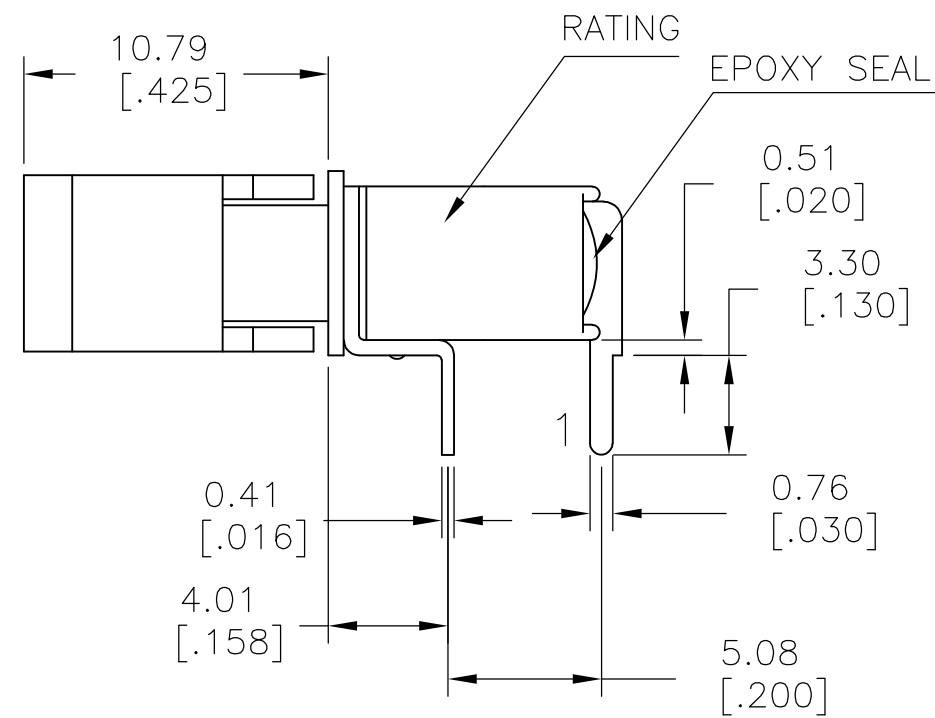
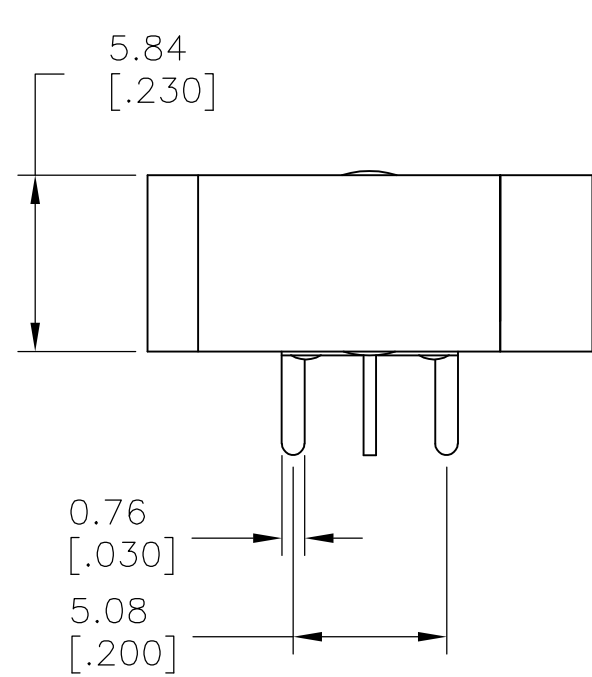


P.C. MOUNTING

SPDT M6

RIGHT ANGLE

B

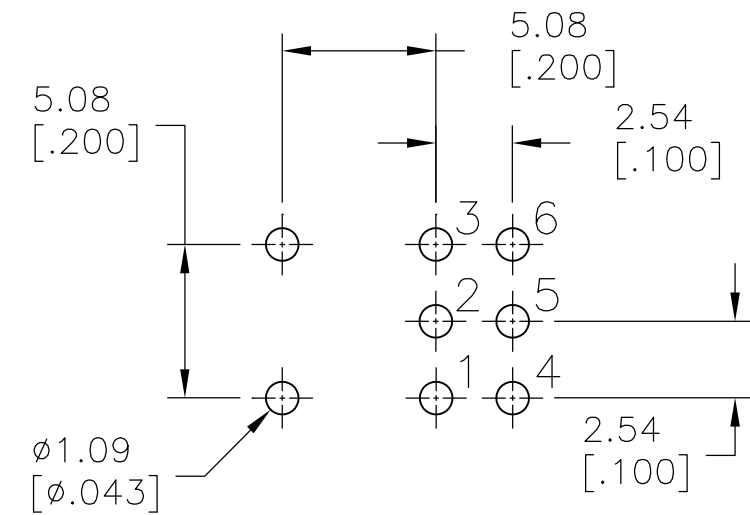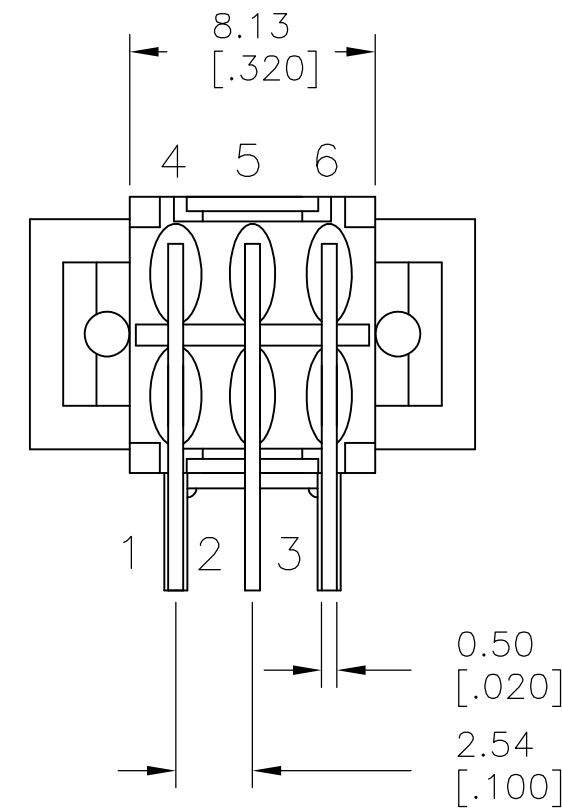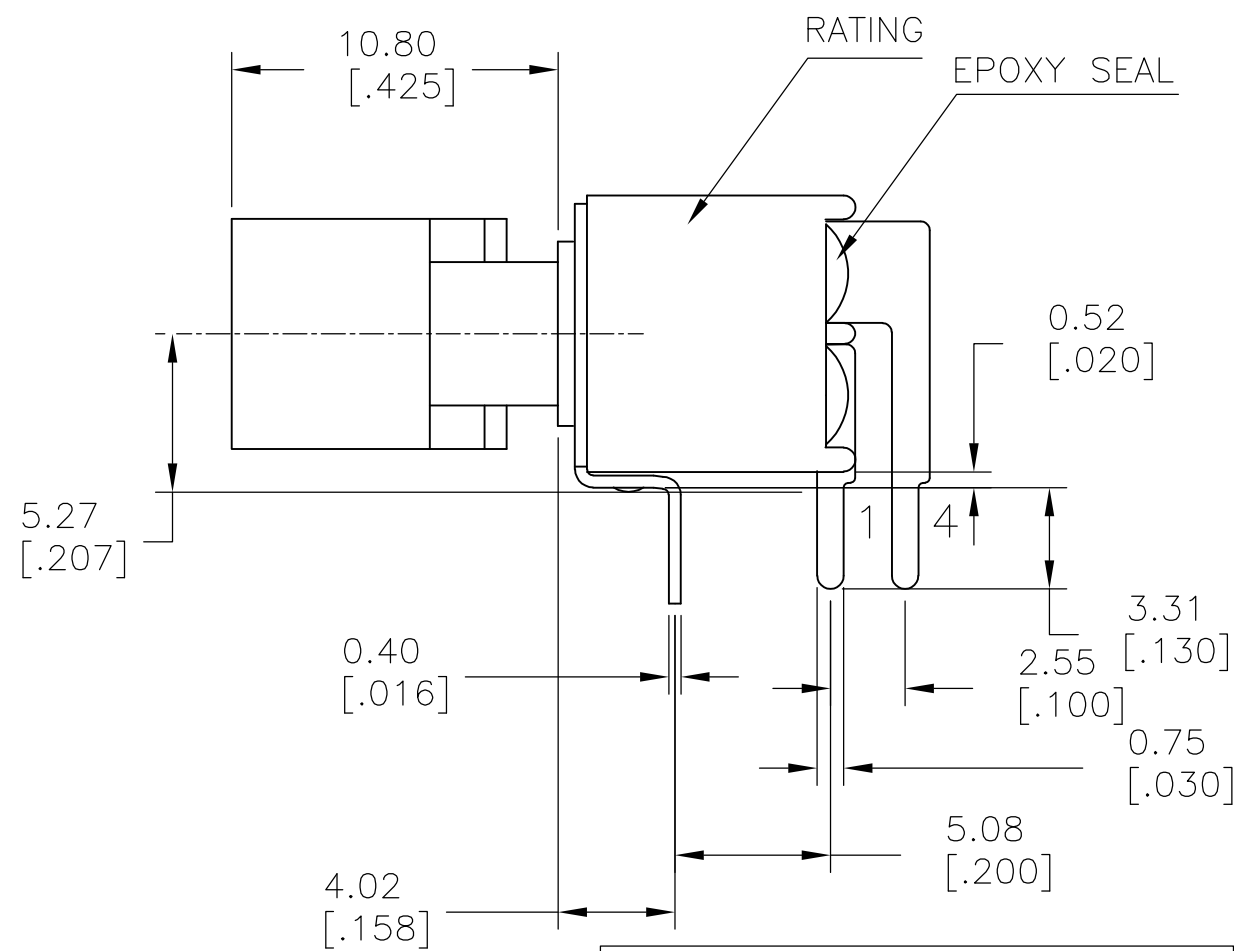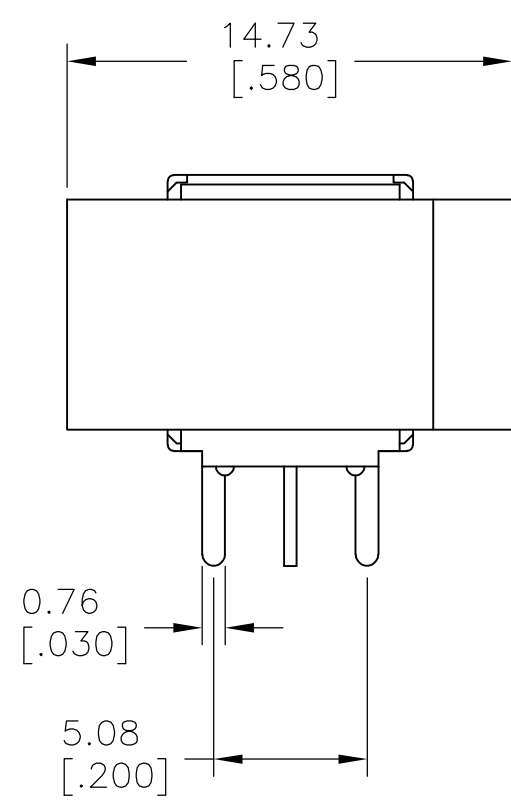



P.C. MOUNTING

DPDT M6



RIGHT ANGLE

LAYOUT FOR PN 2267087-3 & 4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014				
		APVD HILL, RYAN 11JUL2014	NAME			
		PRODUCT SPEC	SUBMINIATURE ROCKER SWITCHES			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± -		-	A2	00779	C=2267087	-
1 PLC ± 0.38 [.015]		-	SCALE 3:1			
2 PLC ± 0.25 [.010]		-	SHEET 3 of 5			
3 PLC ± -		-	REV A			
4 PLC ± -		-				
ANGLES ± 5°		-				
FINISH		-				
MATERIAL		-				
		CUSTOMER DRAWING				

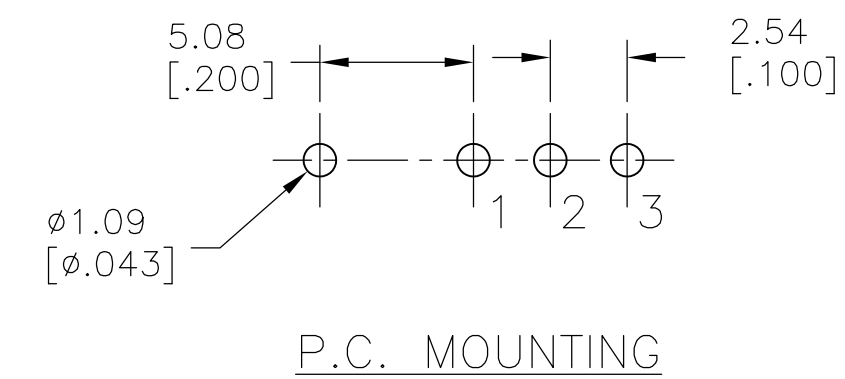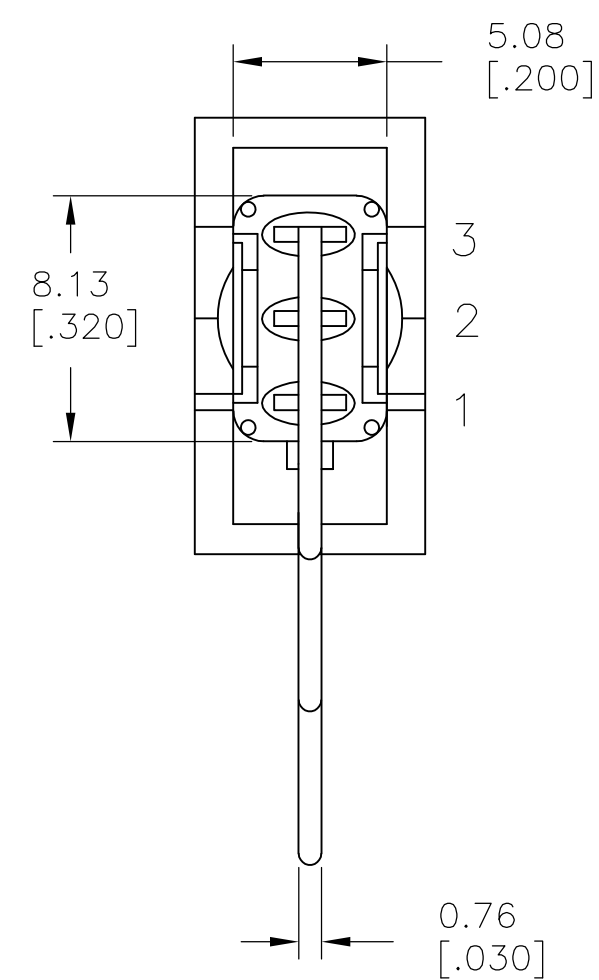

VERTICAL
RIGHT ANGLE

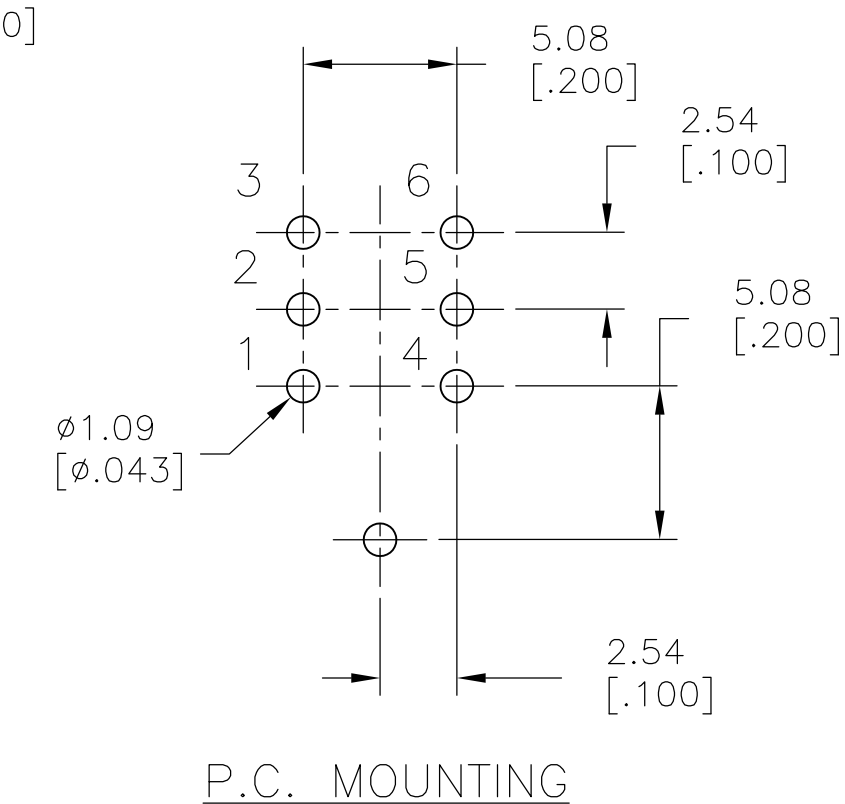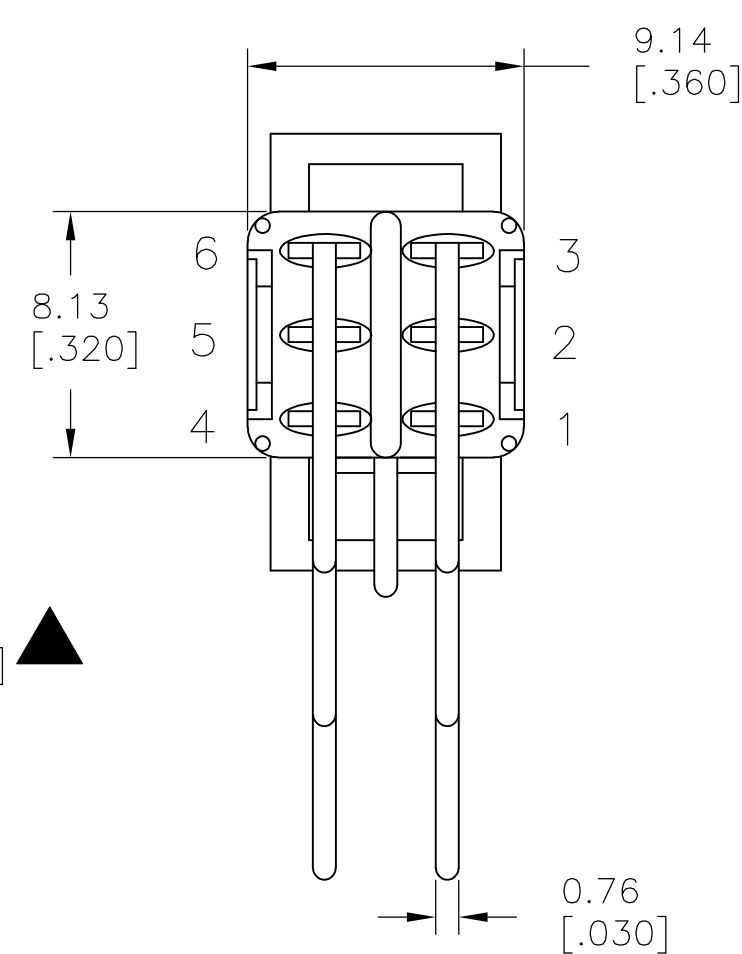




VERTICAL
RIGHT ANGLE

LAYOUT FOR PN 2267087-5 & 6

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
-	-	-	-	SEE SHEET 1	-	-

D

C

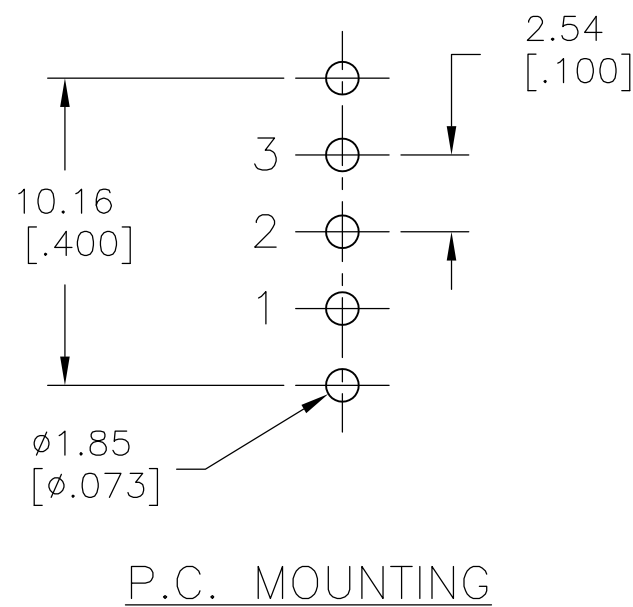
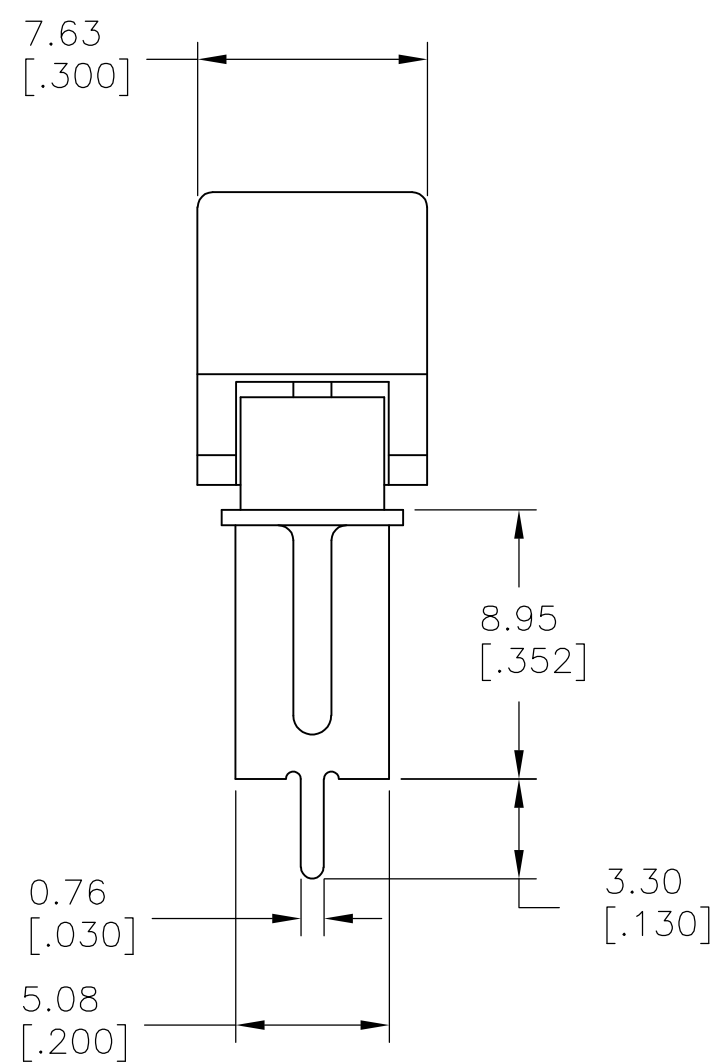
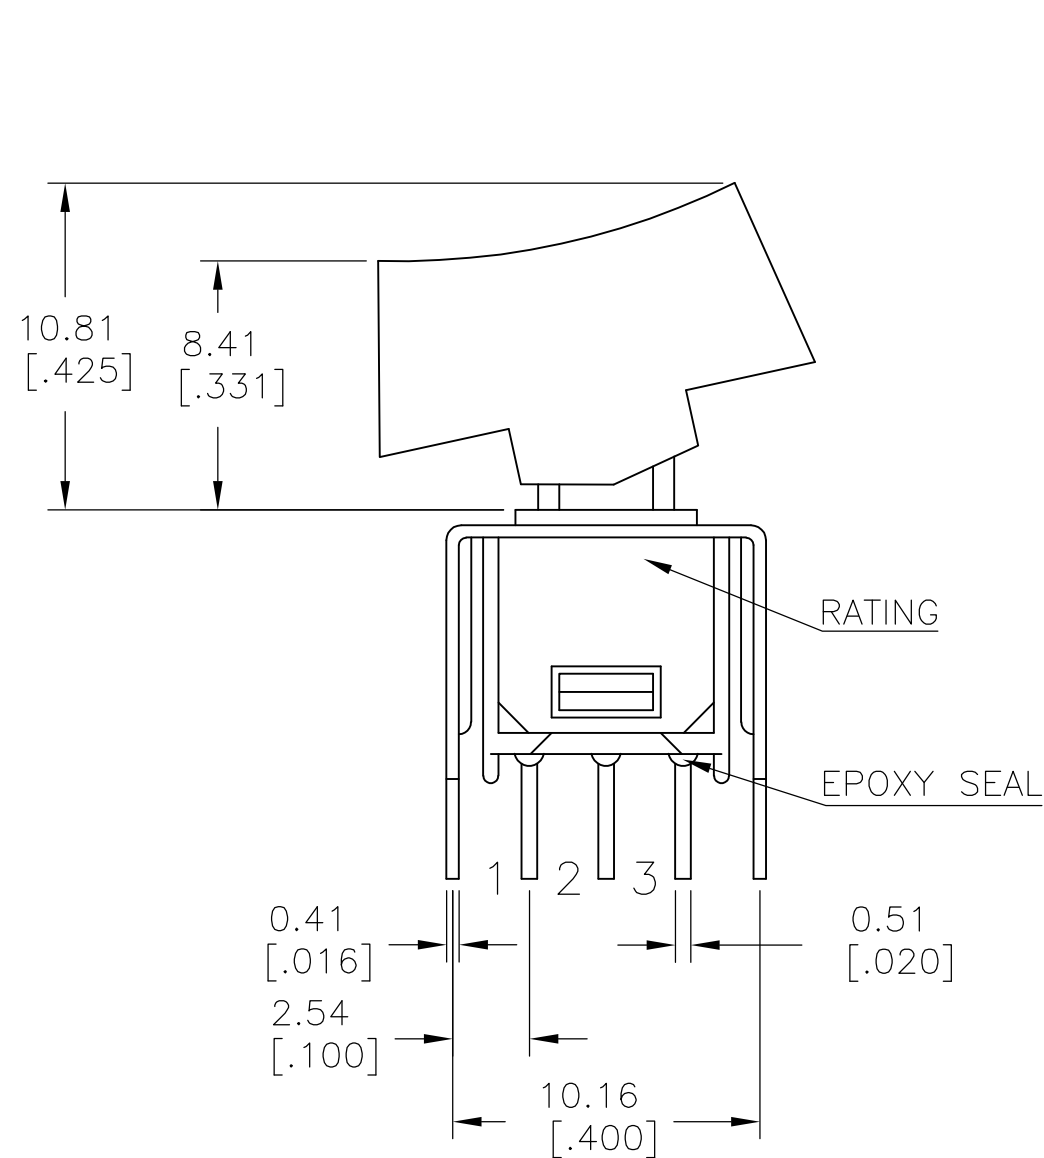


SPDT VS2

VERTICAL V-BRACKET

B

A

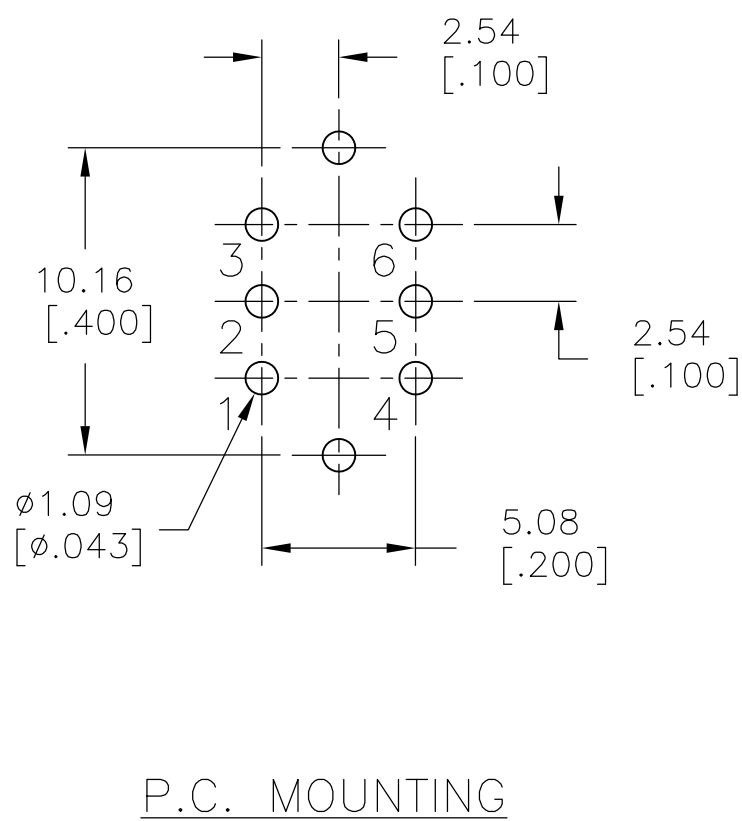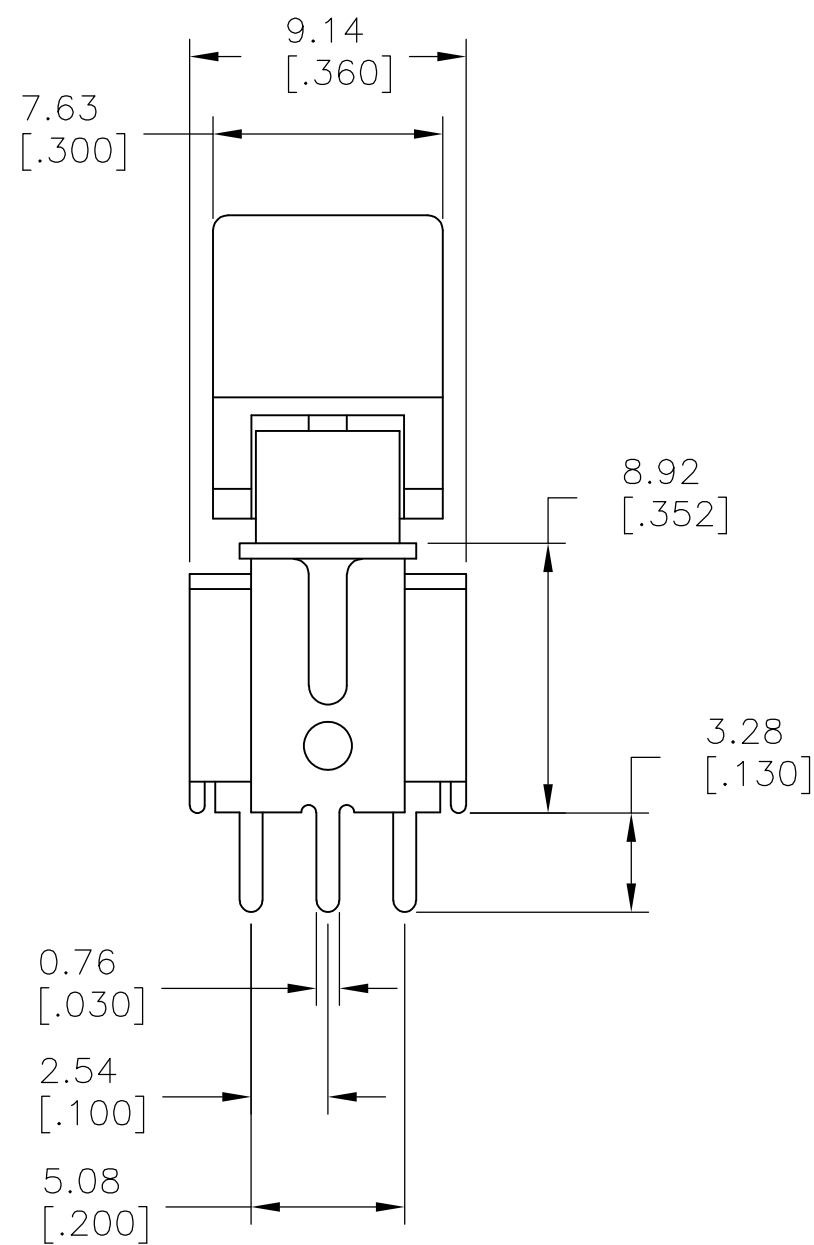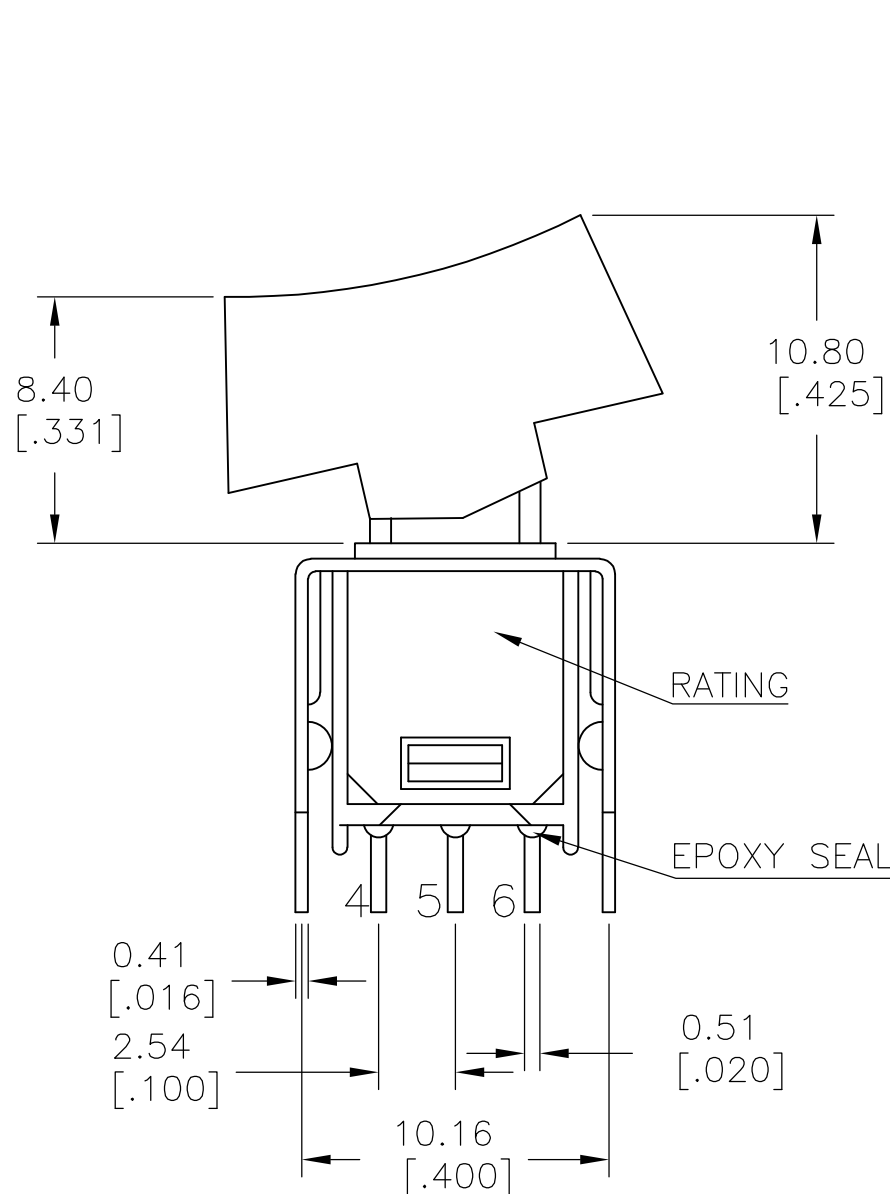

DPDT VS2

VERTICAL V-BRACKET

LAYOUT FOR PN 2267087-7 & 8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014				
		APVD HILL, RYAN 11JUL2014	NAME			
		PRODUCT SPEC	SUBMINIATURE ROCKER SWITCHES			
MATERIAL		FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO
-		-	-	A2	00779	C=2267087
			CUSTOMER DRAWING	SCALE	3:1	SHEET
					5 of 5	REV
						A