

Metal Oxide Resistors, Special Purpose, High Voltage



FEATURES

- Low TC: ± 200 ppm/ $^{\circ}\text{C}$ standard. ± 100 ppm/ $^{\circ}\text{C}$, ± 50 ppm/ $^{\circ}\text{C}$ available.
- $\pm 1\%$ standard to 1 G Ω ; $\pm 5\%$ above 1 G Ω
 $\pm 0.5\%$ available in ± 50 ppm/ $^{\circ}\text{C}$ only. Special tolerance and/or temperature coefficient matching available.
- High Voltage (up to 8 kV)
- For oil bath or open air operation
- Matched sets available
- Special testing available upon request
- Lead (Pb)-free version is RoHS compliant



RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING			VOLTAGE RATING V_{\equiv}	RESISTANCE RANGE Ω^{***}			
		$P_{25^{\circ}\text{C}}$ W**	$P_{70^{\circ}\text{C}}$ W**	$P_{125^{\circ}\text{C}}$ W**		200 ppm	100 ppm	50 ppm	NON-INDUCTIVE ****
RNX025	RNX-1/4	0.5	0.36	0.25	750 V	1K - 100M	1K - 100M	1M-22M	100R-100K
RNX038	RNX-3/8	1.0	0.72	0.5	1.5 kV	1K - 1G	1K - 100M	1M-50M	100R-100K
RNX050	RNX-1/2	1.2	0.86	0.6	2 kV	1K - 2G	1K - 250M	1M-100M	100R-100K
RNX075	RNX-3/4	2.0	1.44	1.0	3 kV	1K - 2G	1K - 500M	1M-100M	100R-100K
RNX100	RNX-1	2.5	1.8	1.25	4 kV	1K - 2G	1K - 500M	1M-100M	100R-1M
RNX125	RNX-1-1/4	3.0	2.16	1.5	5 kV	1K - 2G	1K - 500M	-	100R-1M
RNX150	RNX-1-1/2	4.0	2.88	2.0	6 kV	1K - 2G	1K - 500M	-	100R-1M
RNX200	RNX-2	5.0	3.6	2.5	8 kV	1K - 2G	1K - 500M	-	100R-1M

NOTE:

** Increase wattage by 25 % for 0.032" [0.813 mm] diameter leads.

*** For resistance values above and below those listed please contact us.

**** Non inductive ± 200 ppm/ $^{\circ}\text{C}$ TC only.

- All resistance values are calibrated at 100 VDC. Calibration at other voltages available
- Part Marking: print marked - DALE, Model, Value, Tolerance, TC, Date Code (Model and Date omitted on RNX-1/4)
- Special Modifications:
 - Special preconditioning (power aging, temperature cycling etc.) to customer specifications
 - Non-helixed resistors can be supplied for critical high frequency applications. (Non-inductive).

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: RNX05010K0KKLB (preferred part numbering format)

GLOBAL MODEL (see Standard Electrical Specifications table)	RESISTANCE VALUE R = Decimal K = Thousand M = Million G = Billion 910R = 910 Ω 10M0 = 10 M Ω 1G00 = 1.0 G Ω	TOLERANCE CODE D = $\pm 0.5\%$ F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ K = $\pm 10\%$	TEMP. COEFFICIENT H = 50 ppm K = 100 ppm N = 200 ppm	PACKAGING** EL = Lead (Pb)-free, Lacer EB = Lead (Pb)-free, T/R (1000 pcs) EE = Lead (Pb)-free, T/R (1000 pcs) LB = Tin/Lead, Lacer R6 = Tin/Lead, T/R (1000 pcs) RC = Tin/Lead, T/R (1000 pcs) RF = Tin/Lead, T/R (1000 pcs)	CONSTRUCTION Blank = Standard N = Non-inductive P = 0.032" \varnothing leads	SPECIAL Blank = Standard (Dash Number) (up to 3 digits) From 1-999 as applicable
--	---	--	---	--	---	--


Historical Part Number example: RNX-1/210K0KK (will continue to be accepted)

RNX-1/2		10K0	K	K	L05
HISTORICAL MODEL	CONSTRUCTION	RESISTANCE VALUE	TOLERANCE CODE	TEMP. COEFFICIENT	PACKAGING

NOTE: ** Some packaging codes are model specific.

* Pb containing terminations are not RoHS compliant, exemptions may apply.

DIMENSIONS

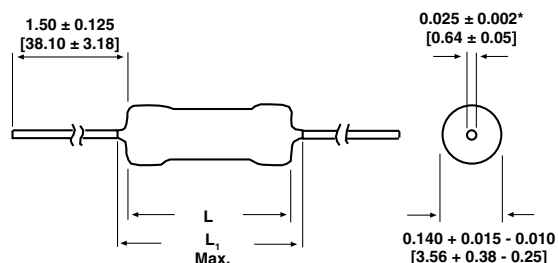


* Available with 0.032" [0.813 mm] leads ± 0.002 " [0.051 mm].

GLOBAL MODEL	DIMENSIONS in inches [millimeters]	
	L	L ₁ Max
RNX025	0.290 ± 0.020 [7.37 ± 0.51]	0.358 [9.09]
RNX038	0.420 ± 0.020 [10.67 ± 0.51]	0.470 [11.94]
RNX050	0.540 ± 0.020 [13.72 ± 0.51]	0.595 [15.11]
RNX075	0.790 ± 0.020 [20.07 ± 0.51]	0.845 [21.46]
RNX100	1.040 ± 0.020 [26.42 ± 0.51]	1.100 [27.81]
RNX125	1.290 ± 0.020 [32.77 ± 0.51]	1.350 [34.16]
RNX150	1.540 ± 0.020 [39.12 ± 0.51]	1.600 [40.51]
RNX200	2.040 ± 0.020 [51.82 ± 0.51]	2.100 [53.34]

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	RNX025	RNX038	RNX050	RNX075	RNX100	RNX125	RNX150	RNX200
Insulation Resistance	Ω	$\geq 10^{11}$							
Category Temperature Range	°C	- 55/+ 155							

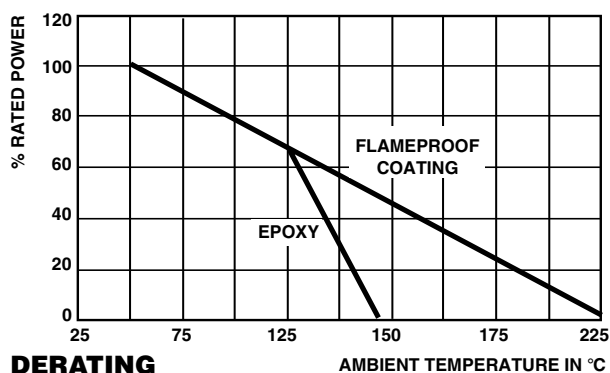

DERATING

MATERIAL SPECIFICATIONS

Element:	High temperature fired cermet film
Core:	High purity 96 % alumina
Coating:	Epoxy on RNX025 and RNX038 Flameproof on RNX050 to RNX200
Termination:	Standard lead material is solder - coated copper. Solderable and weldable.

MECHANICAL SPECIFICATIONS

Terminal Strength:	5 pound pull test
Solderability:	Continuous satisfactory coverage when tested in accordance with MIL-STD-202, Method 208



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.