

Features

Unregulated Converters

- Low Cost 1W Converter
- Industry Standard Pinout
- SIP4 Package
- 1kVDC Isolation
- Efficiency up to 80%
- Wide Operating Temperature Range -40°C to +85°C
- UL60950-1 Certified

RECOM
DC/DC Converter

ROE

**1 Watt
SIP4
Single Output**



Description

The ROE DC/DC converters are typically used in general purpose power isolation and voltage matching applications, and feature a full industrial operating temperature range of -40°C to +85°C without derating.

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	max. Capacitive Load ⁽¹⁾ (μF)
ROE-3.305S	3.3	5	200	79	470
ROE-0505S	5	5	200	79	470
ROE-0512S	5	12	84	80	220
ROE-0515S	5	15	66	80	220
ROE-1205S	12	5	200	80	470
ROE-1505S	15	5	200	79	470
ROE-2405S	24	5	200	80	470

Notes:

Note1: Max. capacitive load is tested at nominal input voltage and full load.





Specifications (measured at T_a= 25°C, nominal input voltage, full load and after warm up)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range				±10%
Operating Frequency Range	V _{in} nominal	50kHz	80kHz	105kHz
Output Ripple and Noise ⁽²⁾	20NMHz BW		50mVp-p	100mVp-p

Efficiency vs. Load

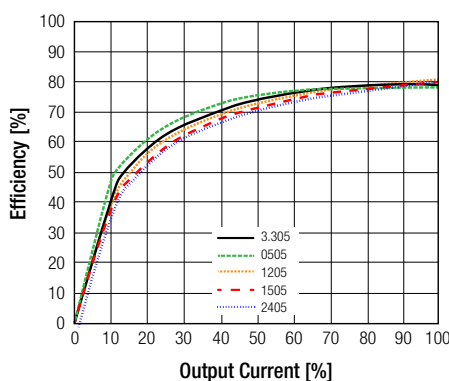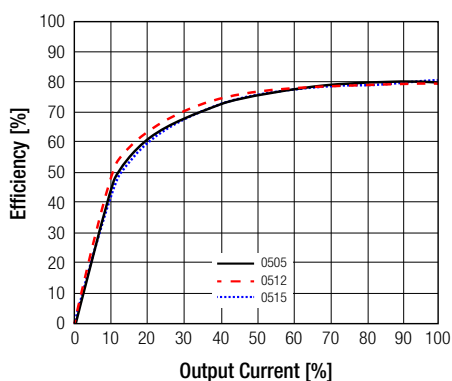

Notes:

Note2: Measurements are made with a 100nF MLCC across output. (low ESR)


UL60950-1 Certified

Specifications (measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm up unless otherwise specified)

REGULATIONS

Parameter	Condition	Values
Output Voltage Accuracy	100% load, V_{in} nominal	$\pm 5\%$ max.
Line Voltage Regulation	low line to high line, full load	$\pm 1.2\%$ typ. / 1% V_{in}
Load Voltage Regulation	20% to 100% load, $5V_{out}$	15% max.
	20% to 100% load, $12V_{out}$ and $15V_{out}$	10% max.

Tolerance Envelope

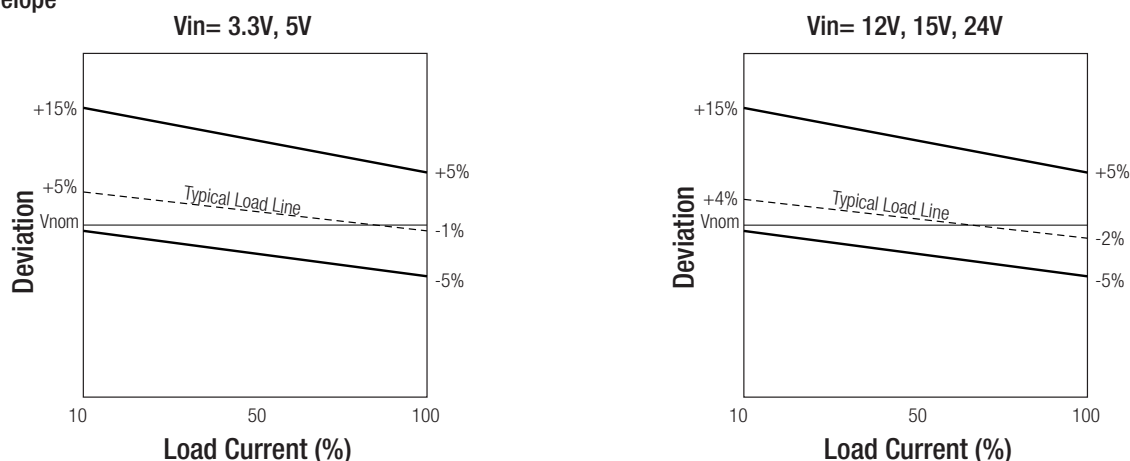

PROTECTIONS

Parameter	Condition	Value
Isolation Voltage	I/P to O/P	1kVDC / 1 second
Isolation Capacitance		75pF max.
Isolation Resistance		1G Ω min.


ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range	free air convection (see graph)	-40°C to $+85^\circ\text{C}$
Operating Humidity	non-condensing	95% RH max.
Vibration		MIL-STD-202G
MTBF ⁽³⁾	according to MIL-HDBK-217F	$+25^\circ\text{C}$ $+85^\circ\text{C}$ 20140 x 10^3 hours 8674 x 10^3 hours

Notes:

Note3: MTBF is referring ROE-3.305S.

Derating Graph

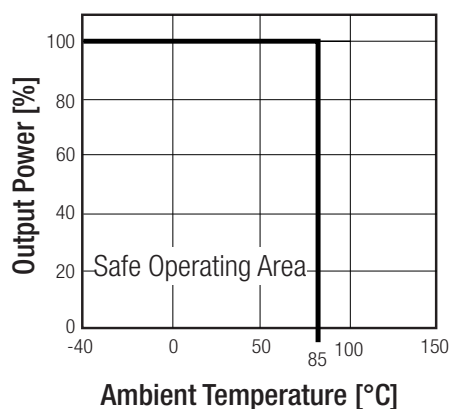


Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm up unless otherwise specified)a

SAFETY AND CERTIFICATIONS

Certificate Type	Report / File Number	Standard
UL General Safety	E358085-A4	UL-60950-1, 2nd Edition
CAN/CSA General Safety	E358085-A4	C22.2 No. 60950-1-07

EMI Compliance	Condition	Standard / Criterion
EMC Conducted and Radiated	only with external filter (see suggestions)	EN55022, Class A EN55022, Class B

EMC Filtering - Suggestions for Class B

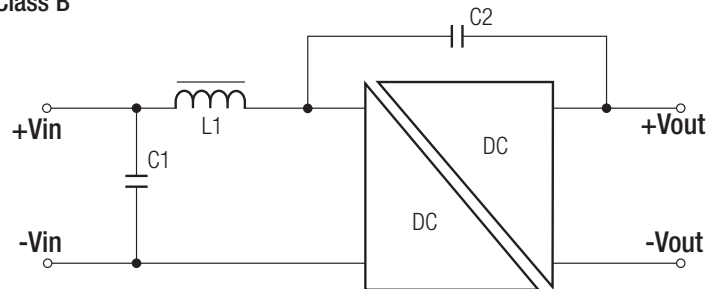



Input Voltage	C1	L1	C2
3.3	10 μF	1.2 μH	470pF/4kVDC
5	10 μF	3.3 μH	470pF/4kVDC
12	2.2 μF	10 μH	470pF/4kVDC
15	2.2 μF	10 μH	470pF/4kVDC
24	2.2 μF	22 μH	470pF/4kVDC

Input Voltage	C1	L1	C2
3.3	22 μF	3.3 μH	470pF/4kVDC
5	10 μF	4.7 μH	470pF/4kVDC
12	4.7 μF	22 μH	470pF/4kVDC
15	4.7 μF	22 μH	470pF/4kVDC
24	2.2 μF	47 μH	470pF/4kVDC

DIMENSION and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Case Material		non-conductive black plastic (UL94V-0)
Potting Material		Epoxy (UL94V-0)
Package Dimension (LxWxH)		11.5 x 6.0 x 10.0mm
Package Weight		1.4g

Dimension Drawing (mm)

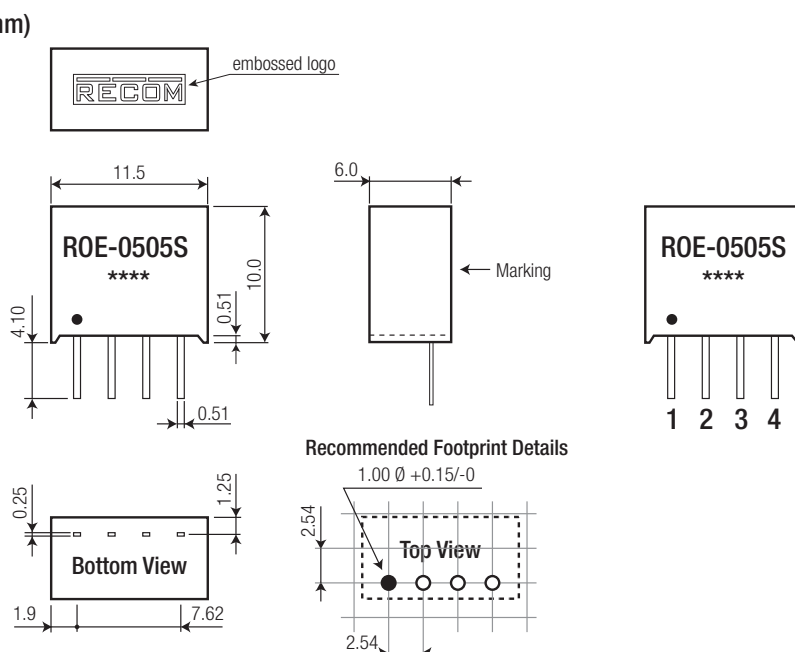

Pin Connections

Pin #	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Tolerance: xx.x = $\pm 0.50\text{mm}$
xx.xx = $\pm 0.25\text{mm}$

Specifications (measured at $T_a = 25^{\circ}\text{C}$, nominal input voltage, full load and after warm-up)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	Tube	520 x 16 x 9mm
Packaging Quantity		42 pcs
Storage Temperature Range		-55°C to $+125^{\circ}\text{C}$

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[ROE-0505S](#) [ROE-3.305S](#) [ROE-0512S](#) [ROE-0515S](#) [ROE-1205S](#) [ROE-1505S](#) [ROE-2405S](#)